

RoHS RoHS-Compliant

Standard AC Motors

World K Series

Induction Motors

Reversible Motors

Electromagnetic Brake Motors

Torque Motors



WORLD K SERIES



**The World K Series -
The Standard AC Motors
Offering the Greatest Utility
for around the World**

The World **K** Series is a global name of our standard AC motors that is usable around the world. Its lineup has been extended with the addition of models conforming to the RoHS Directive.

Offering high reliability and wide range of variations, the World **K** Series supports effective equipment design.


WORLD K SERIES




Induction Motors



Reversible Motors

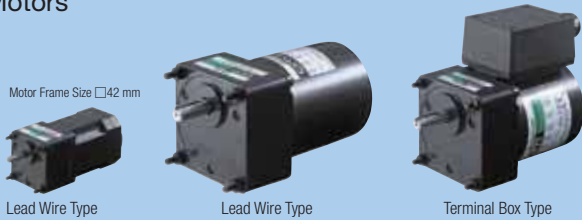

Electromagnetic Brake Motors

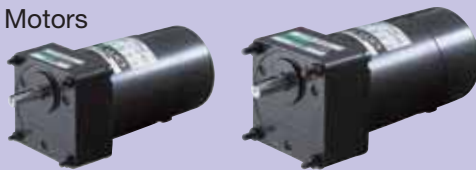

Torque Motors



INDEX

- Features..... P.4
- Lineup..... P.6
- Induction Motors P.8
- Reversible Motors P.42
- Electromagnetic Brake Motors..... P.67
- Torque Motors P.94
- Right-Angle Gearheads P.108
- Brake Pack **SB50W** P.114
- Accessories P.121

Features of the World K Series

If you're looking for reliable motors that can be used in various locations around the world, Oriental Motor has the answer with the **World K Series**. These high-performance models are compatible with major international safety standards and voltage standards of each country and region, and also come in a range of configurations, gearhead types and accessories.

Safety Standards for Safe, Reliable Operation

All **World K Series** models have a built-in overheat protection device and conform to major international safety standards.

■ Applicable Standards

UL/CSA Standards

CE Marking (Low Voltage Directive)



Models certified under CCC (China Compulsory Certification system) are also available. For details, please contact your nearest Oriental Motor sales office.

■ Motor Overheat Protection Device

● Thermal Protector:

A built-in feature of all motors with a frame size of □70 mm or more.

● Impedance Protection:

Implemented in all motors with a frame size of □60 mm or less*.

* Torque motors with a frame size of □60 mm are also equipped with a built-in thermal protector.

Worldwide Voltage Compatibility

Usable with the power-supply voltages in major countries.

The **World K Series** supports the power-supply voltages used in major countries. Motors meeting the local voltage standard are readily available in major countries in Asia, North America and Europe.

■ Major Countries and Voltage Specifications

Country/region	Power-supply voltage	Frequency
Singapore	Single-Phase 230 VAC	50 Hz
	Three-Phase 400 VAC	
Japan	Single-Phase 100 VAC	50 Hz/60Hz
	Single-Phase 200 VAC	
	Three-Phase 200 VAC	
Korea	Single-Phase 110 VAC	60Hz
	Single-Phase 220 VAC	
	Three-Phase 200/220 VAC	
Taiwan	Single-Phase 110 VAC	60Hz
	Single-Phase 220 VAC	
	Three-Phase 220 VAC	
China	Single-Phase 220 VAC	50 Hz
U.S.A.	Single-Phase 115 VAC	60Hz
	Single-Phase 230 VAC	
	Three-Phase 230 VAC	
EU	Single-Phase 230 VAC	50 Hz
	Three-Phase 400 VAC	

RoHS

RoHS-Compliant

The **World K Series** conforms to the RoHS Directive that prohibits the use of six chemical substances including lead and cadmium.

RoHS (Restriction of Hazardous Substances) Directive:

Directive on restriction of the use of certain hazardous substances in electrical and electronic equipment (2002/95/EC).

The RoHS Directive prohibits the use of six chemical substances in electrical and electronic products sold in the E.U. member countries on or after July 1, 2006. The six controlled substances are: lead, hexavalent chromium, cadmium, mercury and two specific brominated flame-retardants (PBB and PBDE).

Wide Variations

Select from a total of 4 models encompassing 336 types.

Oriental Motor has expanded its lineup with the addition of □42 mm motors, 2-pole, high-speed type induction motors and torque motors. You can choose the ideal motor from a total of 336 types according to your specific needs for motor type, voltage specification, output and application requirements.

■ World K Series Output Table

Model/Type		Frame Size				
		□42 mm	□60 mm	□70 mm	□80 mm	□90 mm
Induction Motors	Lead Wire Type	1 W 3 W	6 W	15 W	25 W	40 W 60 W 90 W
	Terminal Box Type	—	6 W	—	25 W	40 W 60 W 90 W
	2-Pole, High-Speed Type	—	—	—	40 W 60 W	60 W 90 W 150 W
Reversible Motors	Lead Wire Type	1 W	6 W	15 W	25 W	40 W 60 W 90 W
	Terminal Box Type	—	6 W	—	25 W	40 W 60 W 90 W
Electromagnetic Brake Motors		—	6 W	15 W	25 W	40 W 60 W 90 W
Torque Motors		—	3 W	6 W	10 W	20 W

Gearhead

"Long life, parallel shaft gearhead" as well as various gearheads can be available.

■ Gearheads

We have dedicated gearheads offering wide gear ratios, as well as right-angle gearheads that minimize the installation space for your equipment.



Parallel Shaft Gearhead



Right-Angle Gearhead
Hollow Shaft Type



Right-Angle Gearhead
Solid Shaft Type

■ Parallel Shaft Gearhead with a Rated Life of 10000 hours

Adopting innovative technologies and structure, the new "long life, parallel shaft gearhead" achieves a rated life of 10000 hours, which is twice as long as the life of our conventional gearhead. The reliable gearhead reduces maintenance problem. Gearhead noise has also been reduced.

■ Motor's Bearing also Lasts 2 Times Longer

A motor's life is determined by its bearing. We adopted high-performance bearing grease to lubricate this important component. As a result, the bearings of **World K Series** motors last twice as long as our conventional bearings.

Brake Pack/ Accessories

We offer a standard-compliant brake pack, as well as a range of accessories.

■ Standard-Compliant Brake Pack **SB50W**



An ideal brake pack for the **World K Series**, the **SB50W** provides useful functions such as instantaneous stop, forward/reverse operation, electromagnetic brake control and thermal protector.

■ Accessories

A range of accessories is available to facilitate motor installation in your equipment. Choose one according to the motor type you've selected.



Mounting Bracket



Coupling

Lineup of the World K Series

Induction Motors

Ideal for uni-directional continuous operation.



Frame Size □42 mm

Lead Wire Type



Lead Wire Type



Terminal Box Type

● 2-Pole, High-Speed Type

Perfect for high-speed applications.



Lead Wire Type



Terminal Box Type

Reversible Motors

Most suitable for applications where instantaneous reversal of direction is frequently required.



Frame Size □42 mm

Lead Wire Type



Lead Wire Type



Terminal Box Type

Electromagnetic Brake Motors

Optimal for applications in which loads must be held. Motors come with a power off activated type electromagnetic brake.



Torque Motors

Suitable for winding and other operations involving tension control, as well as for applications requiring brake.



● For your catalogue, please contact your nearest Oriental Motor sales office.

Induction Motors

Voltage/Type		Frame Size/Output Power		□42 mm	□60 mm	□70 mm	□80 mm	□90 mm			Page
		1 W · 3 W	6 W	15 W	25 W	40 W	60 W	90 W			
Single-Phase 100 VAC*	Lead Wire Type	●	●	●	●	●	●	●	●	●	8
	Terminal Box Type		●		●	●	●	●	●	●	
Single-Phase 110/115 VAC	Lead Wire Type	●	●	●	●	●	●	●	●	●	
	Terminal Box Type		●		●	●	●	●	●	●	
Single-Phase 200 VAC*	Lead Wire Type	●	●	●	●	●	●	●	●	●	
	Terminal Box Type		●		●	●	●	●	●	●	
Single-Phase 220/230 VAC	Lead Wire Type		●	●	●	●	●	●	●	●	
	Terminal Box Type		●		●	●	●	●	●	●	
Three-Phase 200/220/230 VAC	Lead Wire Type		●		●	●	●	●	●	●	
	Terminal Box Type		●		●	●	●	●	●	●	
Three-Phase 400 VAC	Terminal Box Type				●	●	●	●	●	●	

2-Pole, High-Speed Type

Voltage/Type		Frame Size/Output Power		□80 mm		□90 mm			Page
				40 W	60 W	60 W	90 W	150 W	
Single-Phase 100 VAC*	Lead Wire Type			●	●	●	●	●	37
Single-Phase 110/115 VAC	Lead Wire Type			●	●	●	●	●	
Single-Phase 200 VAC*	Lead Wire Type			●	●	●	●	●	
Single-Phase 220/230 VAC	Lead Wire Type			●	●	●	●	●	
Three-Phase 200/220/230 VAC	Lead Wire Type					●	●	●	
	Terminal Box Type							●	

Reversible Motors

Voltage/Type		Frame Size/Output Power		□42 mm	□60 mm	□70 mm	□80 mm	□90 mm			Page
		1 W	6 W	15 W	25 W	40 W	60 W	90 W			
Single-Phase 100 VAC*	Lead Wire Type	●	●	●	●	●	●	●	●	●	42
	Terminal Box Type		●		●	●	●	●	●	●	
Single-Phase 110/115 VAC	Lead Wire Type	●	●	●	●	●	●	●	●	●	
	Terminal Box Type		●		●	●	●	●	●	●	
Single-Phase 200 VAC*	Lead Wire Type	●	●	●	●	●	●	●	●	●	
	Terminal Box Type		●		●	●	●	●	●	●	
Single-Phase 220/230 VAC	Lead Wire Type		●	●	●	●	●	●	●	●	
	Terminal Box Type		●		●	●	●	●	●	●	

Electromagnetic Brake Motors


Voltage		Frame Size/Output Power		□60 mm	□70 mm	□80 mm	□90 mm			Page
				6 W	15 W	25 W	40 W	60 W	90 W	
Single-Phase 100 VAC*				●	●	●	●	●	●	67
Single-Phase 110/115 VAC				●	●	●	●	●	●	
Single-Phase 200 VAC*				●	●	●	●	●	●	
Single-Phase 220/230 VAC				●	●	●	●	●	●	
Three-Phase 200/220/230 VAC				●		●	●	●	●	

Torque Motors

Voltage		Frame Size/Output Power		□60 mm	□70 mm	□80 mm	□90 mm		Page
		3 W	6 W	10 W	20 W				
Single-Phase 100 VAC*		●	●	●	●	●			94
Single-Phase 110/115 VAC		●	●	●	●	●			
Single-Phase 200 VAC*		●	●	●	●	●			
Single-Phase 220/230 VAC		●	●	●	●	●			

* The products for single-phase 100 VAC, single-phase 200 VAC are available. Please contact the nearest Oriental Motor sales office.

Induction Motors

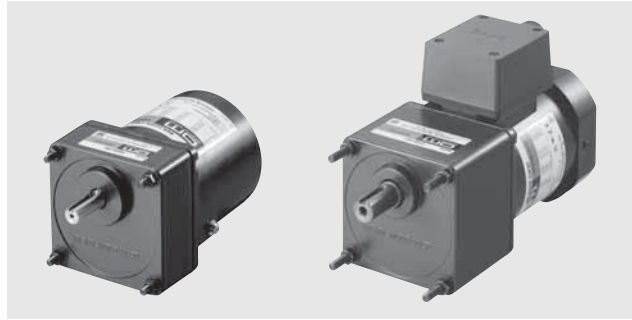

Features

● Optimal for Uni-Directional Continuous Operation

Induction motors are optimal for uni-directional continuous operation such as a conveyor system.

Safety Standards and CE Marking

Standards	Certification Body	Standards File No.	CE Marking
UL 1004 UL 2111 CSA C22.2 No.100 CSA C22.2 No.77	UL	E64199 (1 W~6 W Type) E64197 (15 W~150 W Type)	Low Voltage Directives
EN 60950-1 EN 60034-1 EN 60034-5 IEC 60664-1		Conform to EN/IEC Standards	
GB 12350	CQC	2005010401150786 (Single-Phase 1 W, 3 W Type) 2003010401091525 (Single-Phase 6 W Type) 2003010401091527 (Three-Phase 6 W Type) 2003010401091522 (Single-Phase 15 W~90 W Type) 2003010401091520 (Three-Phase 25 W~90 W Type) 2005010401150785 (2-Pole, High-Speed Type, Single-Phase 40 W~150 W Type) 2005010401150788 (2-Pole, High-Speed Type, Three-Phase 60 W~150 W Type)	

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

● The following products are not applicable to the table above.

**4IK25GN-UT4, 4IK25A-UT4, 5IK40GN-UT4, 5IK40A-UT4,
5IK60GE-UT4F, 5IK60A-UT4F, 5IK90GE-UT4F, 5IK90A-UT4F**

Standards	Certification Body	Standards File No.	CE Marking
EN 60950-1 EN 60034-1 EN 60034-5 IEC 60034-11	TÜV Rheinland	R50079501	Low Voltage Directives

System Configuration

Mounting Brackets (Accessories)
(→ Page 121)

Flexible Couplings (Accessories)
(→ Page 123)

Brake Pack SB50W (Sold separately)
Equipped with instantaneous stopping functions, thermal protector open detection functions.
(→ Page 114)

Right-Angle Gearheads (Sold separately)
(→ Page 108)

Motor

AC Power Supply

Gearheads (Sold separately)

Capacitor Cap* (Included)
Insulating cap for capacitor terminal section.

Capacitor (Included)

● **Example of System Configuration**
(Body) (Sold separately)

Motor (Pinion Shaft)	Long Life/Low Noise GN-S Gearhead	Mounting Bracket	Flexible Coupling
4IK25GN-CW2E	4GN25S	SOL4M5	MCL301012
	⊙	○	○

⊙: Required under this system.
○: Selectable according to necessity. Oriental Motor provides.
*Capacitor cap is included.

● The system configuration shown above is an example. Other configurations are available.

Product Number Code

Motor

5 I K 40 GN - CW 2 T E

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

①	Motor Frame Size	0 : 42 mm 2 : 60 mm 3 : 70 mm 4 : 80 mm 5 : 90 mm
②	Motor Type	I : Induction Motor
③	Series	K : K Series
④	Output Power (W)	(Example) 40 : 40 W
⑤	Motor Shaft Type	GN : GN Type Pinion Shaft GE : GE Type Pinion Shaft A : Round Shaft
⑥	Power Supply Voltage/ Number of Poles	AW : Single-Phase 100 VAC, 110/115 VAC 4-Pole BW : Single-Phase 100 VAC, 110/115 VAC 2-Pole CW : Single-Phase 200 VAC, 220/230 VAC 4-Pole DW : Single-Phase 200 VAC, 220/230 VAC 2-Pole SW : Three-Phase 200/220/230 VAC 4-Pole TW : Three-Phase 200/220/230 VAC 2-Pole U : Three-Phase 400 VAC 4-Pole
⑦	2, 3 : RoHS-Compliant	
⑧	T, T4, T4F : Terminal Box Type	
⑨	Included Capacitor	J : For Single-Phase 100 VAC, 200 VAC U : For Single-Phase 110/115 VAC E : For Single-Phase 220/230 VAC Blank: Three-Phase Type

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

(Example) Model: **5IK40GN-CW2E** → Motor nameplate and product approved under various safety standards: **5IK40GN-CW2**

Gearhead

5 GN 50 S

① ② ③ ④

①	Gearhead Frame Size	0 : 42 mm 2 : 60 mm 3 : 70 mm 4 : 80 mm 5 : 90 mm
②	Type of Pinion	GN : GN Type Pinion GE : GE Type Pinion
③	Gear Ratio	(Example) 50 : Gear Ratio of 1:50 10X denotes the decimal gearhead of gear ratio 1:10
④	GN Type Pinion	S : Long Life/Low Noise GN-S Gearhead, RoHS-Compliant K : GN-K Gearhead RH : Right-Angle/Hollow Shaft Gearhead, RoHS-Compliant RA : Right-Angle/Solid Shaft Gearhead, RoHS-Compliant
	GE Type Pinion	S : Long Life GE-S Gearhead RH : Right-Angle/Hollow Shaft Gearhead, RoHS-Compliant RA : Right-Angle/Solid Shaft Gearhead, RoHS-Compliant

* **GN-K** gearhead of frame size 42 mm complies to RoHS directive.

General Specifications of Motors

● 1 W, 3 W Type

Item	Specifications
Insulation Resistance	100 MΩ or more when 500 VDC megger is applied between the windings and the frame after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 1.5 kV at 50 Hz or 60 Hz applied between the windings and the frame for 1 minute after rated motor operation under normal ambient temperature and humidity.
Temperature Rise	Temperature rise of windings are 75°C or less measured by the resistance change method after rated motor operation under normal ambient temperature and humidity, with connecting a gearhead or equivalent heat radiation plate ^{*1} .
Insulation Class	UL/CSA standards: Class A (105°C), EN standards: Class E (120°C)
Overheat Protection	Impedance protected
Ambient Temperature	-10°C ~ +40°C (nonfreezing)
Ambient Humidity	85% or less (noncondensing)
Degree of Protection	IP20

● 6 W ~ 90 W Type, 2-Pole, High-Speed Type

Item	Specifications
Insulation Resistance	100 MΩ or more when 500 VDC megger is applied between the windings and the frame after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 1.5 kV (three-phase 400 VAC: 2 kV) at 50 Hz and 60 Hz applied between the windings and the frame for 1 minute after rated motor operation under normal ambient temperature and humidity.
Temperature Rise	Temperature rise of windings are 80°C or less measured by the resistance change method under normal ambient temperature and humidity, after rated motor operation with connecting a gearhead or equivalent heat radiation plate ^{*1} . (Three-phase type: 70°C or less)
Insulation Class ^{*2}	Class B (130°C)
Overheat Protection	6 W type has impedance protection. All others have built-in thermal protector (automatic return type) Operating temperature; open: 130°C ± 5°C, close: 82°C ± 15°C
Ambient Temperature	Single-phase 100 VAC, Single-phase 200 VAC, Three-phase 200 VAC: -10°C ~ +50°C (nonfreezing) Other voltage: -10°C ~ +40°C (nonfreezing)
Ambient Humidity	85% or less (noncondensing)
Degree of Protection	Lead Wire Type: IP20 Terminal Box Type: 6 W Type IP65 (excluding the installation surface of the round shaft type) 25 W, 40 W, 60 W, 90 W Type (Pinion Shaft Type) IP54 25 W, 40 W, 60 W, 90 W Type (Round Shaft Type) IP40

*1 Heat radiation plate (Material: Aluminum)

Motor Type	Size (mm)	Thickness (mm)
1 W, 3 W Type	80×80	5
6 W Type	115×115	
15 W Type	125×125	
25 W Type (2-Pole, High-Speed 4IK40 Type, 4IK60 Type)	135×135	
40 W Type (2-Pole, High-Speed 5IK60 Type)	165×165	
60 W, 90 W, 150 W Type	200×200	

*2 The following products are recognized as class E (120°C).

**4IK25GN-UT4, 4IK25A-UT4, 5IK40GN-UT4, 5IK40A-UT4,
5IK60GE-UT4F, 5IK60A-UT4F, 5IK90GE-UT4F, 5IK90A-UT4F**



(Gearhead sold separately)

Specifications – Continuous Rating (RoHS)



Model Lead Wire Type		Output Power W	Voltage VAC	Frequency Hz	Current A	Starting Torque mN·m	Rated Torque mN·m	Rated Speed r/min	Capacitor μF
Pinion Shaft Type	Round Shaft Type								
Ⓢ OIK1GN-AW2J	OIK1A-AW2J	1	Single-Phase 100	50	0.107	8	9.5	1000	1.5
				60	0.102		8	1200	
Ⓢ OIK1GN-AW3U	OIK1A-AW3U	1	Single-Phase 110 Single-Phase 115	60	0.074	8	8	1200	1.0
					0.078				
Ⓢ OIK1GN-CW2J	OIK1A-CW2J	0.8	Single-Phase 200	50	0.057	7	8	1000	0.35
		1		60	0.055			1200	
Ⓢ OIK3GN-BW2J	OIK3A-BW2J	3	Single-Phase 100	50	0.109	6	12	2400	1.8
				60	0.123		10	3000	
Ⓢ OIK3GN-BW3U	OIK3A-BW3U	3	Single-Phase 110 Single-Phase 115	60	0.115	6	10	3000	1.5
					0.118				
Ⓢ OIK3GN-DW2J	OIK3A-DW2J	2.5	Single-Phase 200	50	0.057	5	9.5	2500	0.45
		3		60	0.064			3100	

● The **J** and **U** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.
When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

Ⓢ: Impedance protected

Product Line

● Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	OIK1GN-AW2J	OIK1A-AW2J
	OIK1GN-AW3U	OIK1A-AW3U
	OIK1GN-CW2J	OIK1A-CW2J
	OIK3GN-BW2J	OIK3A-BW2J
	OIK3GN-BW3U	OIK3A-BW3U
	OIK3GN-DW2J	OIK3A-DW2J

● Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Parallel Shaft	OGN□K	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads are sold separately. Decimal gearheads are not available.
- Enter the gear ratio in the box (□) within the model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (4-pole type; 50 Hz: 1500 r/min, 60 Hz: 1800 r/min, 2-pole type; 50 Hz: 3000 r/min, 60 Hz: 3600 r/min) by the gear ratio. The actual speed is 2 - 33% less than the displayed value, depending on the size of the load.

◇ 50 Hz

Unit = N·m

Model	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
OIK1GN-AW2J	OGN□K	0.023	0.028	0.038	0.046	0.058	0.069	0.087	0.1	0.12	0.16	0.19	0.23	0.31	0.38	0.42	0.5	0.56	0.67	0.84	1
OIK1GN-CW2J	OGN□K	0.019	0.023	0.032	0.039	0.049	0.058	0.073	0.088	0.11	0.13	0.16	0.19	0.26	0.32	0.35	0.42	0.47	0.57	0.71	0.85

Unit = N·m

Model	Speed r/min	1000	833	600	500	400	333	240	200	166	120	100	83	60	50	40	33	30	25	20	16
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
OIK3GN-BW2J	OGN□K	0.029	0.035	0.049	0.058	0.073	0.087	0.11	0.13	0.16	0.2	0.24	0.29	0.4	0.48	0.53	0.64	0.71	0.85	1	1
OIK3GN-DW2J	OGN□K	0.023	0.028	0.038	0.046	0.058	0.069	0.087	0.1	0.12	0.16	0.19	0.23	0.31	0.38	0.42	0.5	0.56	0.67	0.84	1

◇ 60 Hz

Unit = N·m

Model	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
OIK1GN-AW2J OIK1GN-AW3U OIK1GN-CW2J	OGN□K	0.019	0.023	0.032	0.039	0.049	0.058	0.073	0.088	0.11	0.13	0.16	0.19	0.26	0.32	0.35	0.42	0.47	0.57	0.71	0.85

Unit = N·m

Model	Speed r/min	1200	1000	720	600	480	400	288	240	200	144	120	100	72	60	48	40	36	30	24	20
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
OIK3GN-BW2J OIK3GN-BW3U	OGN□K	0.024	0.029	0.041	0.049	0.061	0.073	0.091	0.11	0.13	0.17	0.2	0.24	0.33	0.4	0.44	0.53	0.59	0.71	0.89	1
OIK3GN-DW2J	OGN□K	0.023	0.028	0.038	0.046	0.058	0.069	0.087	0.1	0.12	0.16	0.19	0.23	0.31	0.38	0.42	0.5	0.56	0.67	0.84	1

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107

Dimensions (Unit = mm)

Mounting screws are included with gearheads.


◇ Lead Wire Type

Mass: Motor 0.3 kg

Gearhead 0.2 kg


◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

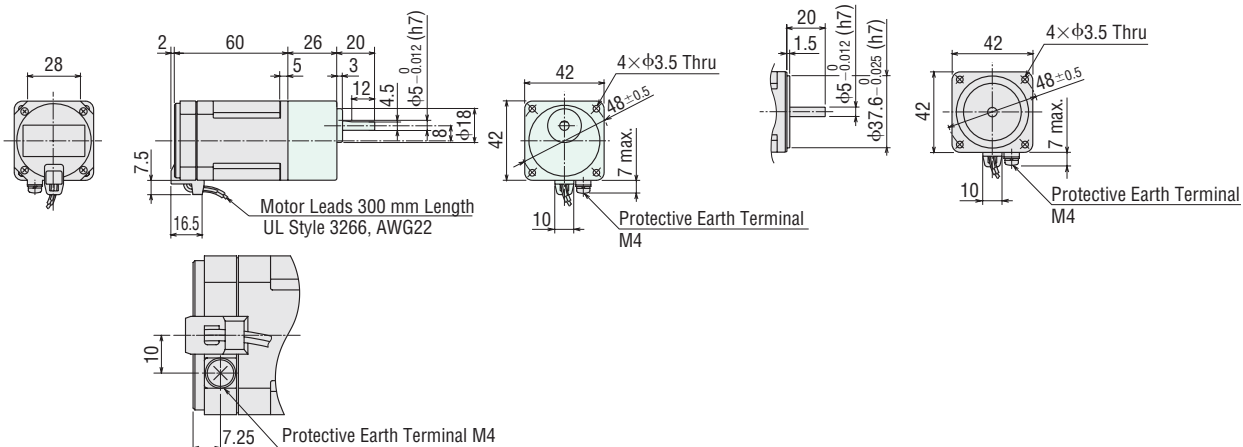

Detail Drawing of Protective Earth Terminal


◇ Capacitor (Included with the motors) ◇ Capacitor Dimensions (mm)



Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Pinion Shaft Type	Round Shaft Type						
OIK1GN-AW2J	OIK1A-AW2J	CH15FAUL	31	14.5	23.5	18	Included
OIK1GN-AW3U	OIK1A-AW3U	CH10FAUL	31	14.5	23.5	18	
OIK1GN-CW2J	OIK1A-CW2J	CH035BFAUL	31	17	27	24	
OIK3GN-BW2J	OIK3A-BW2J	CH18FAUL	31	14.5	23.5	18	
OIK3GN-BW3U	OIK3A-BW3U	CH15FAUL	31	14.5	23.5	18	
OIK3GN-DW2J	OIK3A-DW2J	CH045BFAUL	31	17	27	24	

■ Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.

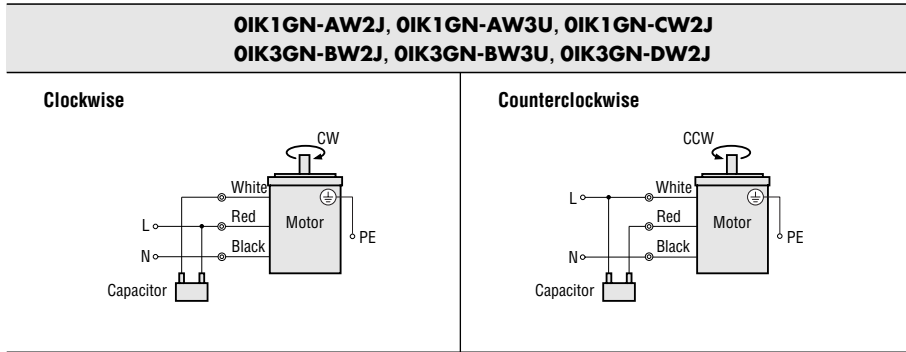

PE: Protective Earth

Note:


Change the direction of single-phase motor rotation only after bringing the motor to a stop.

If an attempt is made to change the direction of rotation while the motor is rotating, motor may ignore reversing command or change its direction of rotation after some delay.

Induction Motors

6 W

Frame Size: □60 mm



Lead Wire Type



Terminal Box Type

(Gearhead sold separately)

Specifications – Continuous Rating (RoHS)



Model		Output Power	Voltage	Frequency	Current	Starting Torque	Rated Torque	Rated Speed	Capacitor
Upper Model Name: Pinion Shaft Type Lower Model Name (): Round Shaft Type									
Lead Wire Type Dimension ①	Terminal Box Type Dimension ②	W	VAC	Hz	A	mN·m	mN·m	r/min	μF
Ⓟ 2IK6GN-AW2J (2IK6A-AW2J)	2IK6GN-AW2TJ (2IK6A-AW2TJ)	6	Single-Phase 100	50	0.199	45	49	1200	3.5
				60	0.217	40	41	1450	
Ⓟ 2IK6GN-AW2U (2IK6A-AW2U)	2IK6GN-AW2TU (2IK6A-AW2TU)	6	Single-Phase 110 Single-Phase 115	60	0.178	40	41	1450	2.5
					0.182				
Ⓟ 2IK6GN-CW2J (2IK6A-CW2J)	2IK6GN-CW2TJ (2IK6A-CW2TJ)	6	Single-Phase 200	50	0.100	45	49	1150	0.8
				60	0.103	40	41	1450	
Ⓟ 2IK6GN-CW2E (2IK6A-CW2E)	2IK6GN-CW2TE (2IK6A-CW2TE)	6	Single-Phase 220 Single-Phase 230	50	0.103	38	49	1150	0.6
				60	0.091	40	41	1450	
				50	0.107	45	49	1200	
				60	0.094	40	41	1450	
Ⓟ 2IK6GN-SW2 (2IK6A-SW2)	2IK6GN-SW2T (2IK6A-SW2T)	6	Three-Phase 200 Three-Phase 220 Three-Phase 230	50	0.081	49	49	1200	-
				60	0.072	41	41	1400	
				60	0.076	41	41	1500	
				60	0.079	41	41	1500	

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

Ⓟ: Impedance protected

Product Line

● Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	2IK6GN-AW2J	2IK6A-AW2J
	2IK6GN-AW2U	2IK6A-AW2U
	2IK6GN-CW2J	2IK6A-CW2J
	2IK6GN-CW2E	2IK6A-CW2E
	2IK6GN-SW2	2IK6A-SW2
Terminal Box	2IK6GN-AW2TJ	2IK6A-AW2TJ
	2IK6GN-AW2TU	2IK6A-AW2TU
	2IK6GN-CW2TJ	2IK6A-CW2TJ
	2IK6GN-CW2TE	2IK6A-CW2TE
	2IK6GN-SW2T	2IK6A-SW2T

● Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	2GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	2GN10XS	(Decimal gearhead)

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the code that represents the terminal box type "T" in the box (□) within the model name.
- Enter the gear ratio in the box (□) within the model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 3 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
2IK6GN-AW2 □J 2IK6GN-CW2 □J 2IK6GN-CW2 □E 2IK6GN-SW2 □	2GN □S	0.12	0.14	0.20	0.24	0.30	0.36	0.50	0.60	0.71	0.89	1.1	1.3	1.6	1.9	2.4	2.9	3	3	3	3

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
2IK6GN-AW2 □J 2IK6GN-AW2 □U 2IK6GN-CW2 □J 2IK6GN-CW2 □E 2IK6GN-SW2 □	2GN □S	0.10	0.12	0.17	0.20	0.25	0.30	0.42	0.50	0.60	0.75	0.90	1.1	1.4	1.6	2.0	2.4	2.7	3	3	3

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107



Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type ①

Mass: Motor 0.7 kg


Gearhead 0.4 kg

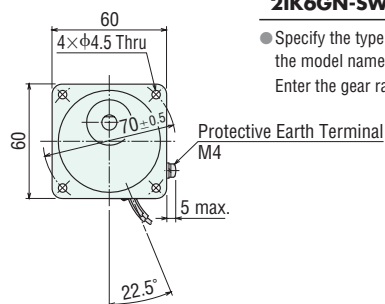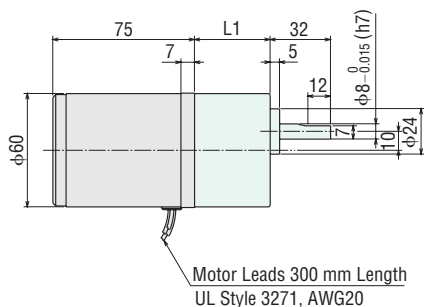

Motor Model	Gearhead Model	Gear Ratio	L1
2IK6GN-AW2 □	2GN □S	3~18	30
2IK6GN-CW2 □		25~180	40
2IK6GN-SW2			

- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.


Enter the gear ratio in the box (□) within the model name.



Detail Drawing of Protective Earth Terminal

◇ Terminal Box Type ②

Mass: Motor 0.9 kg
Gearhead 0.4 kg

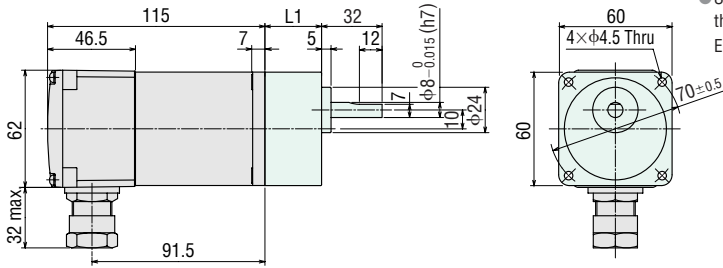


● Use cable with a diameter of $\phi 8 \sim \phi 12$ mm.

Motor Model	Gearhead Model	Gear Ratio	L1
2IK6GN-AW2T <input type="checkbox"/>	2GN <input type="checkbox"/> S	3 ~ 18	30
2IK6GN-CW2T <input type="checkbox"/>			40
2IK6GN-SW2T		25 ~ 180	40

● Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box () within the model name.
Enter the gear ratio in the box () within the model name.

◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

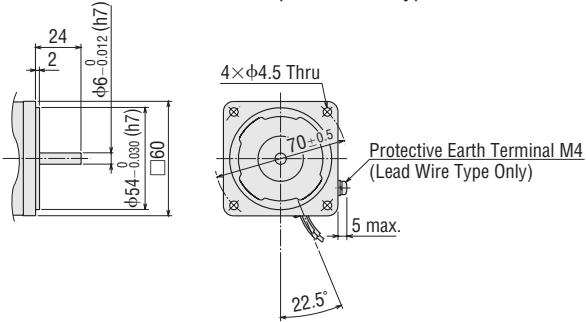


◇ Decimal Gearhead

Can be connected to **GN** pinion shaft type.


2GN10XS

Mass: 0.2 kg

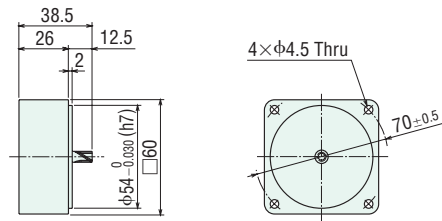

◇ Capacitor

(Included with single-phase motors)



◇ Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Upper Model Name: Pinion Shaft Type	Lower Model Name (): Round Shaft Type						
Lead Wire Type	Terminal Box Type						
2IK6GN-AW2J (2IK6A-AW2J)	2IK6GN-AW2TJ (2IK6A-AW2TJ)	CH35FAUL2	31	17	27	25	Included
2IK6GN-AW2U (2IK6A-AW2U)	2IK6GN-AW2TU (2IK6A-AW2TU)	CH25FAUL2	31	17	27	25	
2IK6GN-CW2J (2IK6A-CW2J)	2IK6GN-CW2TJ (2IK6A-CW2TJ)	CH08BFAUL	31	17	27	20	
2IK6GN-CW2E (2IK6A-CW2E)	2IK6GN-CW2TE (2IK6A-CW2TE)	CH06BFAUL	31	14.5	23.5	15	

Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

Lead Wire Type		Terminal Box Type	
2IK6GN-AW2 □ 2IK6GN-CW2 □	2IK6GN-SW2	2IK6GN-AW2T □ 2IK6GN-CW2T □	2IK6GN-SW2T
Clockwise 	Clockwise 	Clockwise 	Clockwise
Counterclockwise 	Counterclockwise To change the rotation direction, change any two connections between R, S and T.	Counterclockwise 	Counterclockwise To change the rotation direction, change any two connections between U, V and W.

PE: Protective Earth

Note:

Change the direction of single-phase motor rotation only after bringing the motor to a stop.

If an attempt is made to change the direction of rotation while the motor is rotating, motor may ignore reversing command or change its direction of rotation after some delay.

Induction Motors

15 W

Frame Size: □70 mm



(Gearhead sold separately)

Specifications – Continuous Rating **RoHS**

Model Lead Wire Type		Output Power W	Voltage VAC	Frequency Hz	Current A	Starting Torque mN·m	Rated Torque mN·m	Rated Speed r/min	Capacitor μF	
Pinion Shaft Type	Round Shaft Type									
TP	3IK15GN-AW2J	3IK15A-AW2J	15	Single-Phase 100	50	0.36	80	125	1200	5.5
					60	0.37	65	105		
TP	3IK15GN-AW2U	3IK15A-AW2U	15	Single-Phase 110 Single-Phase 115	60	0.33	65	105	1450	4.5
						0.34				
TP	3IK15GN-CW2J	3IK15A-CW2J	15	Single-Phase 200	50	0.18	80	125	1200	1.5
					60	0.19	65	105	1450	
TP	3IK15GN-CW2E	3IK15A-CW2E	15	Single-Phase 220 Single-Phase 230	50	0.19	70	125	1200	1.0
					60	0.16	65	105	1450	
					50	0.19	75	125	1200	
					60	0.16	65	105	1450	

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

Product Line

● Motor **RoHS**

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	3IK15GN-AW2J	3IK15A-AW2J
	3IK15GN-AW2U	3IK15A-AW2U
	3IK15GN-CW2J	3IK15A-CW2J
	3IK15GN-CW2E	3IK15A-CW2E

● Gearhead (Sold Separately) **RoHS**

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	3GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	3GN10XS	(Decimal gearhead)

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the gear ratio in the box (□) within the model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 5 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
3IK15GN-AW2J 3IK15GN-CW2J 3IK15GN-CW2E	3GN□S	0.30	0.36	0.51	0.61	0.76	0.91	1.3	1.5	1.8	2.3	2.7	3.3	4.1	5	5	5	5	5	5	5

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
3IK15GN-AW2J 3IK15GN-AW2U 3IK15GN-CW2J 3IK15GN-CW2E	3GN□S	0.26	0.31	0.43	0.51	0.64	0.77	1.1	1.3	1.5	1.9	2.3	2.8	3.5	4.2	5	5	5	5	5	5

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107




Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type

Mass: Motor 1.1 kg

Gearhead 0.55 kg

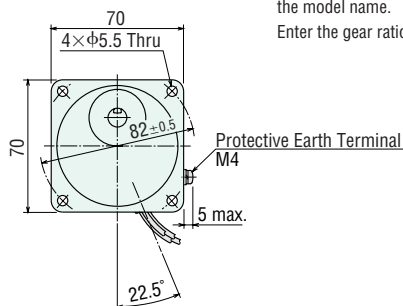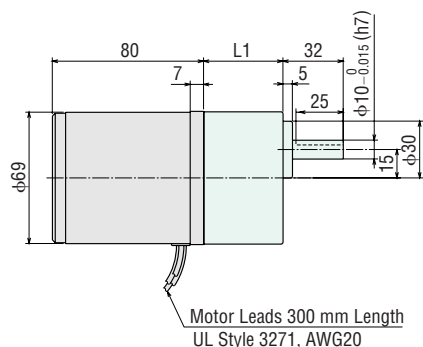


Detail Drawing of Protective Earth Terminal

Motor Model	Gearhead Model	Gear Ratio	L1
3IK15GN-AW2 	3GN□S	3~18	32
3IK15GN-CW2 		25~180	42

- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.


Enter the gear ratio in the box (□) within the model name.

◇ Key and Key Slot (The key is included with the gearhead)



◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

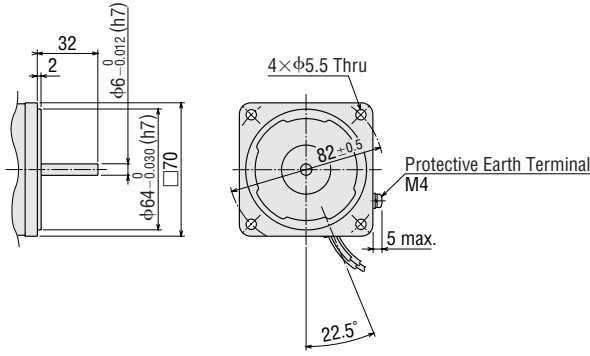


◇ Decimal Gearhead

Can be connected to **GN** pinion shaft type.


3GN10XS

Mass: 0.3 kg

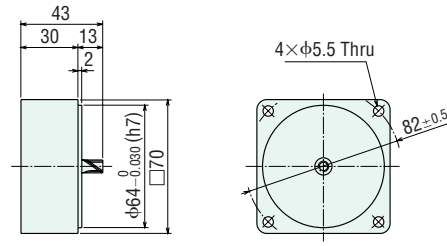

◇ Capacitor

(Included with single-phase motors)




◇ Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Pinion Shaft Type	Round Shaft Type						
3IK15GN-AW2J	3IK15A-AW2J	CH55FAUL2	38	21	31	40	Included
3IK15GN-AW2U	3IK15A-AW2U	CH45FAUL2	37	18	27	30	
3IK15GN-CW2J	3IK15A-CW2J	CH15BFAUL	38	21	31	35	
3IK15GN-CW2E	3IK15A-CW2E	CH10BFAUL	37	18	27	30	

■ Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

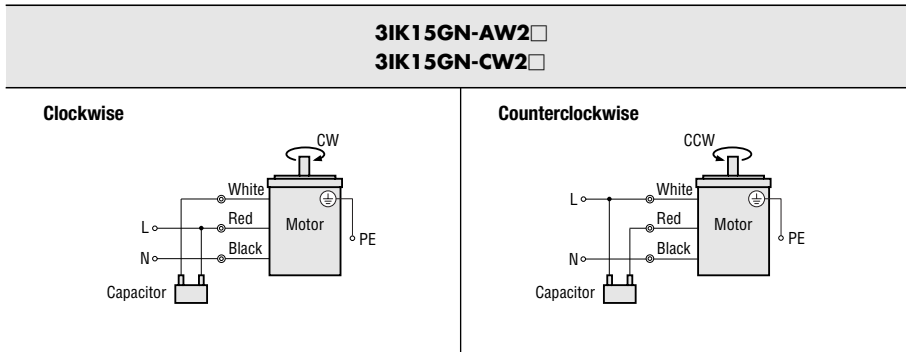


PE: Protective Earth


Note:

Change the direction of single-phase motor rotation only after bringing the motor to a stop.

If an attempt is made to change the direction of rotation while the motor is rotating, motor may ignore reversing command or change its direction of rotation after some delay.

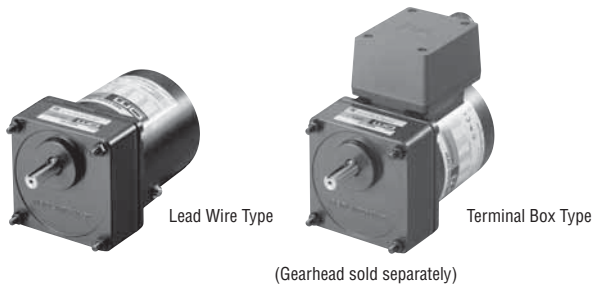

Right-angle gearheads (hollow shaft or solid shaft) can be combined.
Right-Angle Gearheads → Page 108



Specifications – Continuous Rating (RoHS)



Model		Output Power	Voltage	Frequency	Current	Starting Torque	Rated Torque	Rated Speed	Capacitor
Upper Model Name: Pinion Shaft Type	Lower Model Name: Round Shaft Type								
Lead Wire Type Dimension ①	Terminal Box Type Dimension ②	W	VAC	Hz	A	mN-m	mN-m	r/min	μF
TP 4IK25GN-AW2J (4IK25A-AW2J)	4IK25GN-AW2TJ (4IK25A-AW2TJ)	25	Single-Phase 100	50	0.51	130	205	1200	8.0
				60	0.52	120	170	1450	
TP 4IK25GN-AW2U (4IK25A-AW2U)	4IK25GN-AW2TU (4IK25A-AW2TU)	25	Single-Phase 110	60	0.46	120	170	1450	6.5
				Single-Phase 115					
TP 4IK25GN-CW2J (4IK25A-CW2J)	4IK25GN-CW2TJ (4IK25A-CW2TJ)	25	Single-Phase 200	50	0.26	120	205	1200	2.0
				60			170	1450	
TP 4IK25GN-CW2E (4IK25A-CW2E)	4IK25GN-CW2TE (4IK25A-CW2TE)	25	Single-Phase 220	50	0.27	110	205	1200	1.5
				60			0.23	170	
			Single-Phase 230	50	0.27	120	205	1200	
				60	0.23		170	1450	
TP 4IK25GN-SW2 (4IK25A-SW2)	4IK25GN-SW2T (4IK25A-SW2T)	25	Three-Phase 200	50	0.23	240	190	1300	-
				60	0.21	160	160	1550	
				60	0.21	160	160	1600	
TP 4IK25GN-SW2 (4IK25A-SW2)	4IK25GN-SW2T (4IK25A-SW2T)	25	Three-Phase 220	60	0.21	160	160	1600	-
				60	0.21	160	160	1600	
				60	0.22	160	160	1600	
TP -	4IK25GN-UT4* (4IK25A-UT4*)	25	Three-Phase 400	50	0.12	240	190	1300	-

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.

When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

* Conforms to EN/IEC standards only. Bears the CE Marking.

Note:

A three-phase 400 VAC motor cannot be used with an inverter. Using them together may lead to deterioration of the motor wiring insulation and damage the products.

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

Product Line

● Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	4IK25GN-AW2J	4IK25A-AW2J
	4IK25GN-AW2U	4IK25A-AW2U
	4IK25GN-CW2J	4IK25A-CW2J
	4IK25GN-CW2E	4IK25A-CW2E
	4IK25GN-SW2	4IK25A-SW2
	4IK25GN-SW2T	4IK25A-SW2T
Terminal Box	4IK25GN-AW2TJ	4IK25A-AW2TJ
	4IK25GN-AW2TU	4IK25A-AW2TU
	4IK25GN-CW2TJ	4IK25A-CW2TJ
	4IK25GN-CW2TE	4IK25A-CW2TE
	4IK25GN-SW2T	4IK25A-SW2T
	4IK25GN-UT4	4IK25A-UT4

● Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	4GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	4GN10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	4GN□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	4GN□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the code that represents the terminal box type "T" in the box (□) within the model name.
- Enter the gear ratio in the box (□) within the model name.
- A colored background (□) indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 8 N·m. When a gearhead of 1/25~1/36 is connected, the value for permissible torque is 6 N·m.

◇ 50 Hz

Unit = N·m

Model	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
4IK25GN-AW2 □J 4IK25GN-CW2 □J 4IK25GN-CW2 □E	4GN □S	0.50	0.60	0.83	1.0	1.2	1.5	2.1	2.5	3.0	3.7	4.5	5.4	6.8	8	8	8	8	8	8	8
4IK25GN-SW2 □ 4IK25GN-UT4	4GN □S	0.46	0.55	0.77	0.92	1.2	1.4	1.9	2.3	2.8	3.5	4.2	5.0	6.3	7.5	8	8	8	8	8	8

◇ 60 Hz

Unit = N·m

Model	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
4IK25GN-AW2 □J 4IK25GN-AW2 □U 4IK25GN-CW2 □J 4IK25GN-CW2 □E	4GN □S	0.41	0.50	0.69	0.83	1.0	1.2	1.7	2.1	2.5	3.1	3.7	4.5	5.6	6.7	8	8	8	8	8	8
4IK25GN-SW2 □	4GN □S	0.39	0.47	0.65	0.78	0.97	1.2	1.6	1.9	2.3	2.9	3.5	4.2	5.3	6.3	7.9	8	8	8	8	8

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107




Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type ①

Mass: Motor 1.5 kg

Gearhead 0.65 kg

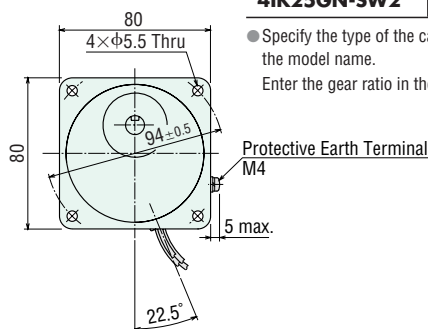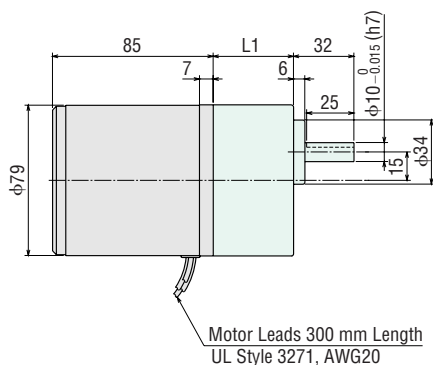

Detail Drawing of Protective Earth Terminal


Motor Model	Gearhead Model	Gear Ratio	L1
4IK25GN-AW2 □ 4IK25GN-CW2 □ 4IK25GN-SW2	4GN □S	3~18	32
		25~180	42.5

● Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

Enter the gear ratio in the box (□) within the model name.

◇ Terminal Box Type ②

Mass: Motor 1.7 kg
Gearhead 0.65 kg

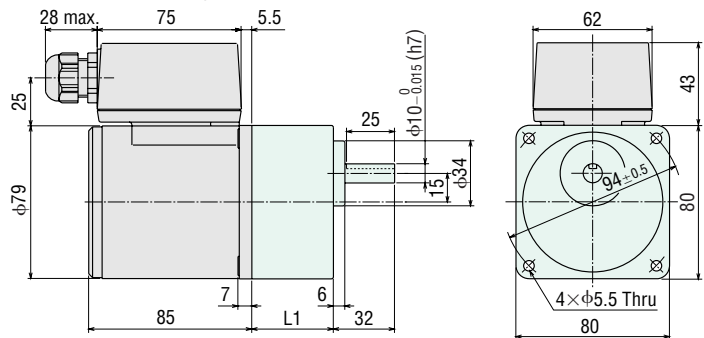


● Use cable with a diameter of φ6 ~ φ12 mm.

Motor Model	Gearhead Model	Gear Ratio	L1
4IK25GN-AW2T <input type="checkbox"/>	4GN <input type="checkbox"/> S	3~18	32
4IK25GN-CW2T <input type="checkbox"/> 4IK25GN-SW2T <input type="checkbox"/> 4IK25GN-UT4 <input type="checkbox"/>		25~180	42.5

● Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box () within the model name.
Enter the gear ratio in the box () within the model name.


◇ Key and Key Slot

(The key is included with the gearhead)



◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

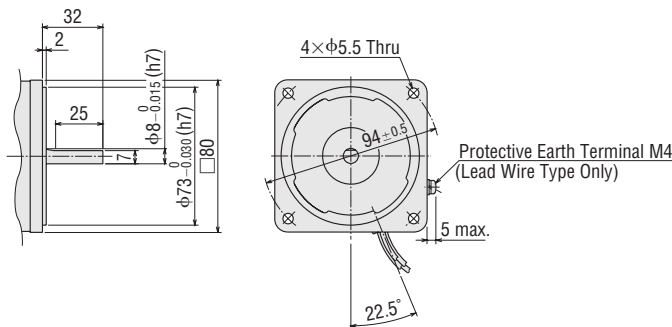


◇ Decimal Gearhead

Can be connected to **GN** pinion shaft type.


4GN10XS

Mass: 0.4 kg

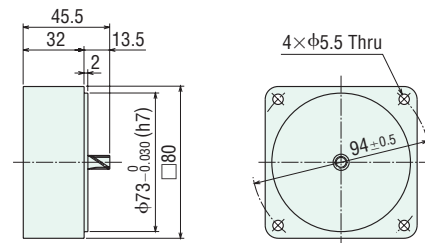

◇ Capacitor

(Included with single-phase motors)



◇ Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Upper Model Name: Pinion Shaft Type Lower Model Name (): Round Shaft Type							
Lead Wire Type	Terminal Box Type						
4IK25GN-AW2J (4IK25A-AW2J)	4IK25GN-AW2TJ (4IK25A-AW2TJ)	CH80CFAUL2	48	21	31	45	Included
4IK25GN-AW2U (4IK25A-AW2U)	4IK25GN-AW2TU (4IK25A-AW2TU)	CH65CFAUL2	48	19	29	40	
4IK25GN-CW2J (4IK25A-CW2J)	4IK25GN-CW2TJ (4IK25A-CW2TJ)	CH20BFAUL	48	19	29	35	
4IK25GN-CW2E (4IK25A-CW2E)	4IK25GN-CW2TE (4IK25A-CW2TE)	CH15BFAUL	38	21	31	35	

Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.


Lead Wire Type		Terminal Box Type	
4IK25GN-AW2 □ 4IK25GN-CW2 □	4IK25GN-SW2	4IK25GN-AW2T □ 4IK25GN-CW2T □	4IK25GN-SW2T 4IK25GN-UT4
Clockwise 	Clockwise 	Clockwise 	Clockwise
Counterclockwise 	Counterclockwise To change the rotation direction, change any two connections between R, S and T.	Counterclockwise 	Counterclockwise To change the rotation direction, change any two connections between U, V and W.

PE: Protective Earth


Note:

Change the direction of single-phase motor rotation only after bringing the motor to a stop.

If an attempt is made to change the direction of rotation while the motor is rotating, motor may ignore reversing command or change its direction of rotation after some delay.

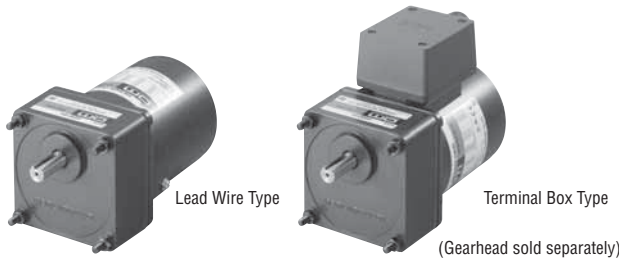

Right-angle gearheads (hollow shaft or solid shaft) can be combined.
Right-Angle Gearheads → Page 108



Specifications – Continuous Rating (RoHS)



Model		Output Power	Voltage	Frequency	Current	Starting Torque	Rated Torque	Rated Speed	Capacitor
Upper Model Name: Pinion Shaft Type	Lower Model Name (): Round Shaft Type								
Lead Wire Type Dimension ①	Terminal Box Type Dimension ②	W	VAC	Hz	A	mN·m	mN·m	r/min	μF
TP 5IK40GN-AW2J (5IK40A-AW2J)	5IK40GN-AW2TJ (5IK40A-AW2TJ)	40	Single-Phase 100	50	0.76	200	315	1250	11
				60	0.74		260	1500	
TP 5IK40GN-AW2U (5IK40A-AW2U)	5IK40GN-AW2TU (5IK40A-AW2TU)	40	Single-Phase 110 Single-Phase 115	60	0.68	200	260	1500	9.0
					0.67				
TP 5IK40GN-CW2J (5IK40A-CW2J)	5IK40GN-CW2TJ (5IK40A-CW2TJ)	40	Single-Phase 200	50	0.39	200	315	1250	3.0
				60	0.40		260	1500	
TP 5IK40GN-CW2E (5IK40A-CW2E)	5IK40GN-CW2TE (5IK40A-CW2TE)	40	Single-Phase 220	50	0.39	200	315	1250	2.3
				60	0.35		260	1500	
			Single-Phase 230	50	0.39		300	1300	
				60	0.34		260	1500	
TP 5IK40GN-SW2 (5IK40A-SW2)	5IK40GN-SW2T (5IK40A-SW2T)	40	Three-Phase 200	50	0.32	400	300	1300	-
				60	0.30	260	260	1550	
				Three-Phase 220	60	0.30	260	260	
TP -	5IK40GN-SW2T (5IK40A-SW2T)	40	Three-Phase 230	60	0.31	260	260	1600	-
				Three-Phase 400	50	0.16	500	315	

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.
When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

* Conforms to EN/IEC standards only. Bears the CE Marking.

Note:

A three-phase 400 VAC motor cannot be used with an inverter. Using them together may lead to deterioration of the motor wiring insulation and damage the products.

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

Product Line

Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	5IK40GN-AW2J	5IK40A-AW2J
	5IK40GN-AW2U	5IK40A-AW2U
	5IK40GN-CW2J	5IK40A-CW2J
	5IK40GN-CW2E	5IK40A-CW2E
	5IK40GN-SW2	5IK40A-SW2
Terminal Box	5IK40GN-AW2TJ	5IK40A-AW2TJ
	5IK40GN-AW2TU	5IK40A-AW2TU
	5IK40GN-CW2TJ	5IK40A-CW2TJ
	5IK40GN-CW2TE	5IK40A-CW2TE
	5IK40GN-SW2T	5IK40A-SW2T
	5IK40GN-SW2T	5IK40A-SW2T
	5IK40GN-UT4	5IK40A-UT4

Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	5GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GN10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	5GN□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	5GN□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the code that represents the terminal box type "T" in the box (□) within the model name.
- Enter the gear ratio in the box (□) within the model name.
- A colored background (□) indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 10 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5IK40GN-AW2 □J 5IK40GN-CW2 □J 5IK40GN-CW2 □E (Single-phase 220 VAC)	5GN □S	0.77	0.92	1.3	1.5	1.9	2.3	3.2	3.8	4.6	5.7	6.9	8.3	10	10	10	10	10	10	10	10
5IK40GN-CW2 □E (Single-phase 230 VAC) 5IK40GN-SW2 □	5GN □S	0.73	0.87	1.2	1.5	1.8	2.2	3.0	3.6	4.4	5.5	6.6	7.9	9.9	10	10	10	10	10	10	10
5IK40GN-UT4	5GN □S	0.77	0.92	1.3	1.5	1.9	2.3	3.2	3.8	4.6	5.7	6.9	8.3	10	10	10	10	10	10	10	10

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5IK40GN-AW2 □J 5IK40GN-AW2 □U 5IK40GN-CW2 □J 5IK40GN-CW2 □E 5IK40GN-SW2 □	5GN □S	0.63	0.76	1.1	1.3	1.6	1.9	2.6	3.2	3.8	4.7	5.7	6.8	8.6	10	10	10	10	10	10	10

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107

Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type ①


Mass: Motor 2.5 kg

Gearhead 1.5 kg

Motor Model	Gearhead Model	Gear Ratio	L1
5IK40GN-AW2 □	5GN □S	3~18	42
5IK40GN-CW2 □		25~180	60
5IK40GN-SW2			

● Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

Enter the gear ratio in the box (□) within the model name.

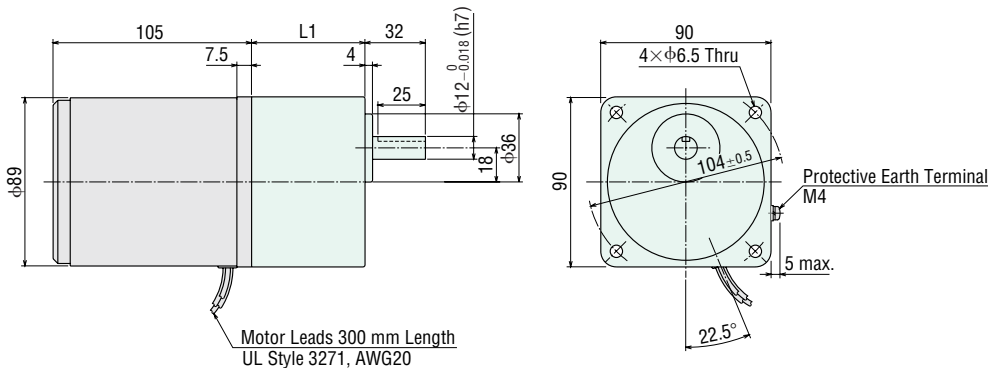


Detail Drawing of Protective Earth Terminal

◇ Terminal Box Type ②


Mass: Motor 2.6 kg
Gearhead 1.5 kg

Motor Model	Gearhead Model	Gear Ratio	L1
5IK40GN-AW2T <input type="checkbox"/>	5GN <input type="checkbox"/> S	3~18	42
5IK40GN-CW2T <input type="checkbox"/>			
5IK40GN-SW2T <input type="checkbox"/>		25~180	
5IK40GN-UT4 <input type="checkbox"/>			

● Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box () within the model name.
Enter the gear ratio in the box () within the model name.

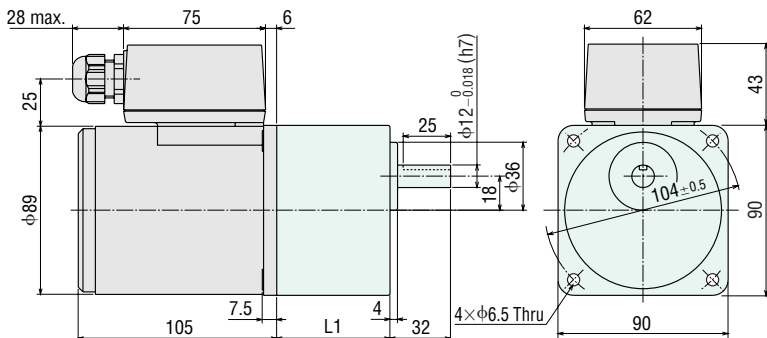


◇ Key and Key Slot
(The key is included with the gearhead)



● Use cable with a diameter of φ6 ~ φ12 mm.


◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

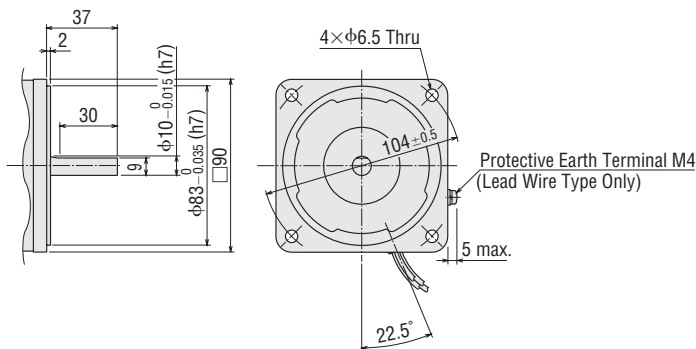


◇ Decimal Gearhead

Can be connected to **GN** pinion shaft type.
5GN10XS
Mass: 0.6 kg

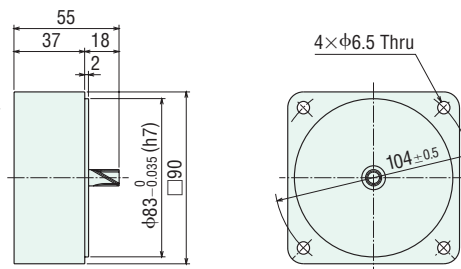

◇ Capacitor

(Included with single-phase motors)



◇ Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Upper Model Name: Pinion Shaft Type	Lower Model Name (): Round Shaft Type						
Lead Wire Type	Terminal Box Type						
5IK40GN-AW2J (5IK40A-AW2J)	5IK40GN-AW2TJ (5IK40A-AW2TJ)	CH110CFAUL2	58	21	31	50	Included
5IK40GN-AW2U (5IK40A-AW2U)	5IK40GN-AW2TU (5IK40A-AW2TU)	CH90CFAUL2	48	22.5	31.5	45	
5IK40GN-CW2J (5IK40A-CW2J)	5IK40GN-CW2TJ (5IK40A-CW2TJ)	CH30BFAUL	58	21	31	50	
5IK40GN-CW2E (5IK40A-CW2E)	5IK40GN-CW2TE (5IK40A-CW2TE)	CH23BFAUL	48	21	31	40	

Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

Lead Wire Type		Terminal Box Type	
<p>5IK40GN-AW2 □ 5IK40GN-CW2 □</p> <p>Clockwise</p> <p>Counterclockwise</p>	<p>5IK40GN-SW2</p> <p>Clockwise</p> <p>Counterclockwise To change the rotation direction, change any two connections between R, S and T.</p>	<p>5IK40GN-AW2T □ 5IK40GN-CW2T □</p> <p>Clockwise</p> <p>Counterclockwise</p>	<p>5IK40GN-SW2T 5IK40GN-UT4</p> <p>Clockwise</p> <p>Counterclockwise To change the rotation direction, change any two connections between U, V and W.</p>

PE: Protective Earth

Note:

Change the direction of single-phase motor rotation only after bringing the motor to a stop.

If an attempt is made to change the direction of rotation while the motor is rotating, motor may ignore reversing command or change its direction of rotation after some delay.

1 W / 3 W

6 W

15 W


25 W

40 W

60 W


90 W

2-Pole, High-Speed
40 W ~ 150 W

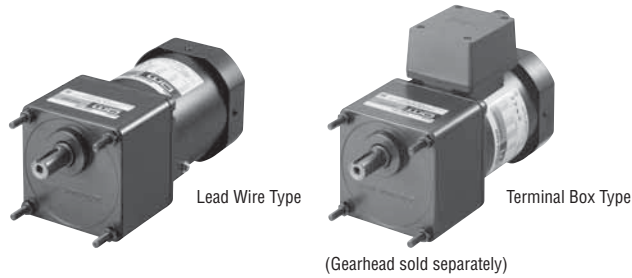

Right-angle gearheads (hollow shaft or solid shaft) can be combined.

Right-Angle Gearheads → Page 108

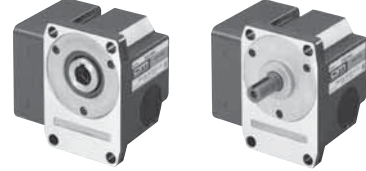

Specifications – Continuous Rating (RoHS)



Model Upper Model Name: Pinion Shaft Type Lower Model Name (): Round Shaft Type		Output Power W	Voltage VAC	Frequency Hz	Current A	Starting Torque mN·m	Rated Torque mN·m	Rated Speed r/min	Capacitor μF
Lead Wire Type Dimension ①	Terminal Box Type Dimension ②								
TP	5IK60GE-AW2J (5IK60A-AW2J)	60	Single-Phase 100	50	1.20	320	490	1200	20
				60	1.19		405	1450	
TP	5IK60GE-AW2U (5IK60A-AW2U)	60	Single-Phase 110 Single-Phase 115	60	1.09	320	405	1450	18
					1.10				
TP	5IK60GE-CW2J (5IK60A-CW2J)	60	Single-Phase 200	50	0.57	320	490	1200	5.0
				60	0.65		405	1450	
TP	5IK60GE-CW2E (5IK60A-CW2E)	60	Single-Phase 220	50	0.55	320	490	1200	4.0
				60	0.54		405	1450	
			Single-Phase 230	50	0.57		490	1200	
				60	0.54		405	1450	
TP	5IK60GE-SW2 (5IK60A-SW2)	60	Three-Phase 200 Three-Phase 220 Three-Phase 230	50	0.50	600	450	1300	-
				60	0.43	500	380	1550	
				60	0.45	500	380	1600	
TP	-	60	Three-Phase 400	60	0.46	500	380	1600	-
TP	-	60	Three-Phase 400	50	0.25	550	470	1250	-

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.

When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

* Conforms to EN/IEC standards only. Bears the CE Marking.

Note:

A three-phase 400 VAC motor cannot be used with an inverter. Using them together may lead to deterioration of the motor wiring insulation and damage the products.

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

Product Line

Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	5IK60GE-AW2J	5IK60A-AW2J
	5IK60GE-AW2U	5IK60A-AW2U
	5IK60GE-CW2J	5IK60A-CW2J
	5IK60GE-CW2E	5IK60A-CW2E
	5IK60GE-SW2	5IK60A-SW2
Terminal Box	5IK60GE-AW2TJ	5IK60A-AW2TJ
	5IK60GE-AW2TU	5IK60A-AW2TU
	5IK60GE-CW2TJ	5IK60A-CW2TJ
	5IK60GE-CW2TE	5IK60A-CW2TE
	5IK60GE-SW2T	5IK60A-SW2T
	5IK60GE-SW2TE	5IK60A-SW2TE
	5IK60GE-UT4F	5IK60A-UT4F

Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/ Parallel Shaft	5GE□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GE10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	5GE□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	5GE□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the code that represents the terminal box type "T" in the box (□) within the model name.
- Enter the gear ratio in the box (□) within the model name.
- A colored background (□) indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 20 N·m.

◇ 50 Hz

Unit = N·m

Model	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5IK60GE-AW2□J 5IK60GE-CW2□J 5IK60GE-CW2□E	5GE□S	1.2	1.4	2.0	2.4	3.0	3.6	4.5	5.4	6.4	8.1	9.7	11.6	16.2	19.4	20	20	20	20	20	20
5IK60GE-SW2□	5GE□S	1.1	1.3	1.8	2.2	2.7	3.3	4.1	4.9	5.9	7.4	8.9	10.7	14.9	17.8	19.9	20	20	20	20	20
5IK60GE-UT4F	5GE□S	1.1	1.4	1.9	2.3	2.9	3.4	4.3	5.1	6.2	7.8	9.3	11	16	19	20	20	20	20	20	20

◇ 60 Hz

Unit = N·m

Model	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5IK60GE-AW2□J 5IK60GE-AW2□U 5IK60GE-CW2□J 5IK60GE-CW2□E	5GE□S	0.98	1.2	1.6	2.0	2.5	3.0	3.7	4.4	5.3	6.7	8.0	9.6	13.4	16.0	17.9	20	20	20	20	20
5IK60GE-SW2□	5GE□S	0.92	1.1	1.5	1.8	2.3	2.8	3.5	4.2	5.0	6.3	7.5	9.0	12.5	15.0	16.8	20	20	20	20	20

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107


Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type ①


Mass: Motor 2.7 kg

Gearhead 1.5 kg

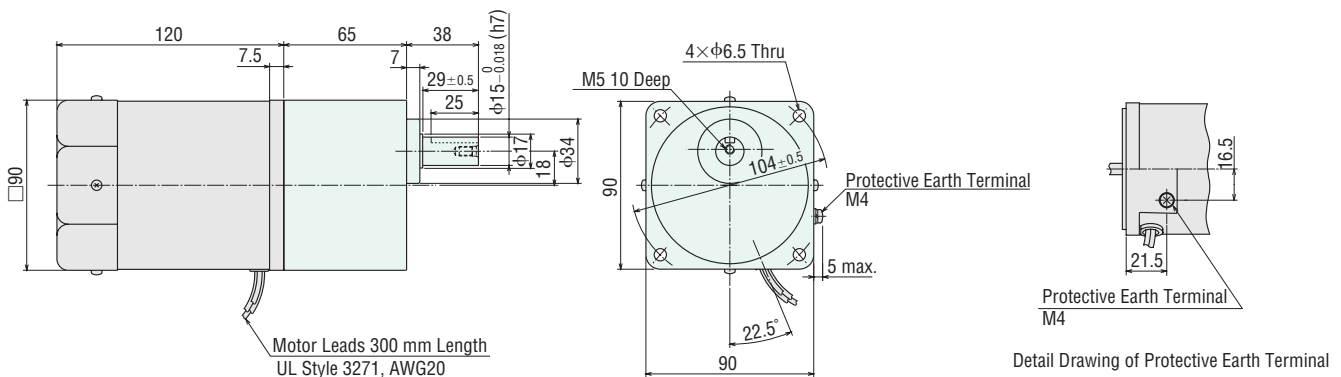


◇ Terminal Box Type ②

Mass: Motor 2.8 kg
Gearhead 1.5 kg

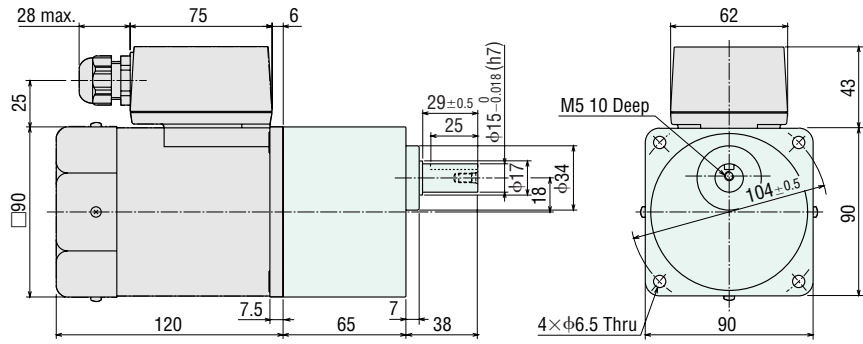

◇ Key and Key Slot


(The key is included with the gearhead)



● Use cable with a diameter of φ6 ~ φ12 mm.

◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

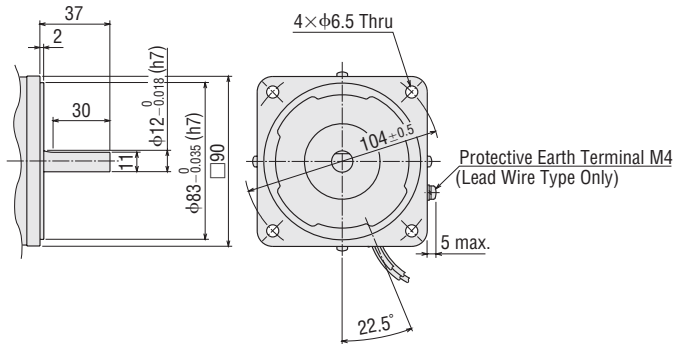


◇ Decimal Gearhead

Can be connected to **GE** pinion shaft type.


5GE10XS

Mass: 0.6 kg

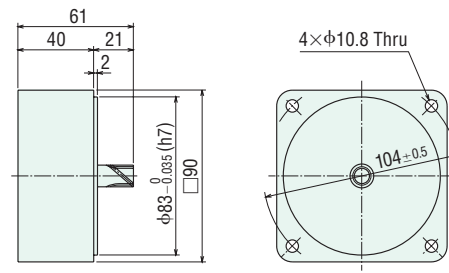

◇ Capacitor

(Included with single-phase motors)

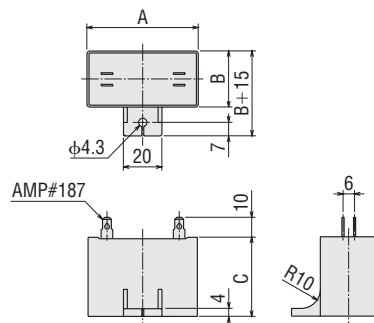

◇ Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Upper Model Name: Pinion Shaft Type	Lower Model Name (): Round Shaft Type						
Lead Wire Type	Terminal Box Type						
51K60GE-AW2J (51K60A-AW2J)	51K60GE-AW2TJ (51K60A-AW2TJ)	CH200CFAUL2	58	29	41	95	Included
51K60GE-AW2U (51K60A-AW2U)	51K60GE-AW2TU (51K60A-AW2TU)	CH180CFAUL2	58	29	41	95	
51K60GE-CW2J (51K60A-CW2J)	51K60GE-CW2TJ (51K60A-CW2TJ)	CH50BFAUL	58	29	41	85	
51K60GE-CW2E (51K60A-CW2E)	51K60GE-CW2TE (51K60A-CW2TE)	CH40BFAUL	58	23.5	37	70	

Connection Diagrams


- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

Lead Wire Type		Terminal Box Type	
5IK60GE-AW2 □ 5IK60GE-CW2 □	5IK60GE-SW2	5IK60GE-AW2T □ 5IK60GE-CW2T □	5IK60GE-SW2T 5IK60GE-UT4F
<p>Clockwise</p>	<p>Clockwise</p> <p>Counterclockwise To change the rotation direction, change any two connections between R, S and T.</p>	<p>Clockwise</p>	<p>Clockwise</p> <p>Counterclockwise To change the rotation direction, change any two connections between U, V and W.</p>
<p>Counterclockwise</p>	<p>Counterclockwise</p>		

PE: Protective Earth


Note:

Change the direction of single-phase motor rotation only after bringing the motor to a stop.
If an attempt is made to change the direction of rotation while the motor is rotating, motor may ignore reversing command or change its direction of rotation after some delay.

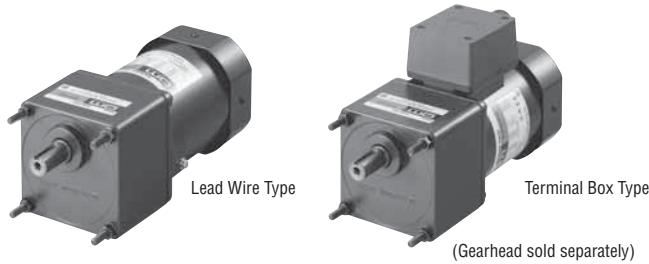

Right-angle gearheads (hollow shaft or solid shaft) can be combined.

Right-Angle Gearheads → Page 108

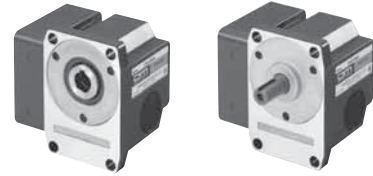

Specifications – Continuous Rating (RoHS)



Model		Output Power	Voltage	Frequency	Current	Starting Torque	Rated Torque	Rated Speed	Capacitor	
Upper Model Name: Pinion Shaft Type	Lower Model Name (): Round Shaft Type									
Lead Wire Type	Terminal Box Type	W	VAC	Hz	A	mN·m	mN·m	r/min	μF	
TP	51K90GE-AW2J (51K90A-AW2J)	51K60GE-AW2TJ (51K90A-AW2TJ)	90	Single-Phase 100	50	1.64	450	700	1250	28
					60	1.67		585		
TP	51K90GE-AW2U (51K90A-AW2U)	51K90GE-AW2TU (51K90A-AW2TU)	90	Single-Phase 110 Single-Phase 115	60	1.45	450	585	1500	20
						1.44				
TP	51K90GE-CW2J (51K90A-CW2J)	51K90GE-CW2TJ (51K90A-CW2TJ)	90	Single-Phase 200	50	0.80	450	730	1200	7.0
					60	0.93		605		
TP	51K90GE-CW2E (51K90A-CW2E)	51K90GE-CW2TE (51K90A-CW2TE)	90	Single-Phase 220	50	0.74	450	730	1200	6.0
					60	0.82		605		
				Single-Phase 230	50	0.76		730	1200	
					60	0.81		605	1450	
TP	51K90GE-SW2 (51K90A-SW2)	51K90GE-SW2T (51K90A-SW2T)	90	Three-Phase 200 Three-Phase 220 Three-Phase 230	50	0.64	850	680	1300	-
					60	0.59	700	570	1550	
					60	0.60	700	570	1600	
TP	-	51K90GE-UT4F* (51K90A-UT4F*)	90	Three-Phase 400	50	0.35	850	700	1250	-

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.

When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

* Conforms to EN/IEC standards only. Bears the CE Marking.

Note:

A three-phase 400 VAC motor cannot be used with an inverter. Using them together may lead to deterioration of the motor wiring insulation and damage the products.

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

Product Line

Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	51K90GE-AW2J	51K90A-AW2J
	51K90GE-AW2U	51K90A-AW2U
	51K90GE-CW2J	51K90A-CW2J
	51K90GE-CW2E	51K90A-CW2E
	51K90GE-SW2	51K90A-SW2
Terminal Box	51K90GE-AW2TJ	51K90A-AW2TJ
	51K90GE-AW2TU	51K90A-AW2TU
	51K90GE-CW2TJ	51K90A-CW2TJ
	51K90GE-CW2TE	51K90A-CW2TE
	51K90GE-SW2T	51K90A-SW2T
	51K90GE-SW2TE	51K90A-SW2TE
	51K90GE-UT4F	51K90A-UT4F

Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/ Parallel Shaft	5GE□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GE10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	5GE□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	5GE□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the code that represents the terminal box type "T" in the box (□) within the model name.
- Enter the gear ratio in the box (□) within the model name.
- A colored background □ indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 20 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5IK90GE-AW2 □J / 5GE □S	1.7	2.0	2.8	3.4	4.3	5.1	6.4	7.7	9.2	11.6	13.9	16.6	20	20	20	20	20	20	20	20	20
5IK90GE-CW2 □J / 5GE □S	1.8	2.1	3.0	3.5	4.4	5.3	6.7	8.0	9.6	12.0	14.5	17.3	20	20	20	20	20	20	20	20	20
5IK90GE-CW2 □E																					
5IK90GE-SW2 □ / 5GE □S	1.7	2.0	2.8	3.3	4.1	5.0	6.2	7.4	8.9	11.2	13.5	16.2	20	20	20	20	20	20	20	20	20
5IK90GE-UT4F / 5GE □S	1.7	2.0	2.8	3.4	4.3	5.1	6.4	7.7	9.2	12	14	17	20	20	20	20	20	20	20	20	20

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10	
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180	
5IK90GE-AW2 □J / 5GE □S	1.4	1.7	2.4	2.8	3.6	4.3	5.3	6.4	7.7	9.7	11.6	13.9	19.3	20	20	20	20	20	20	20	20	
5IK90GE-AW2 □U																						
5IK90GE-CW2 □J / 5GE □S	1.5	1.8	2.5	2.9	3.7	4.4	5.5	6.6	7.9	10.0	12.0	14.4	20	20	20	20	20	20	20	20	20	
5IK90GE-CW2 □E																						
5IK90GE-SW2 □ / 5GE □S	1.4	1.7	2.3	2.8	3.5	4.2	5.2	6.2	7.5	9.4	11.3	13.5	18.8	20	20	20	20	20	20	20	20	

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107


Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type ①

Mass: Motor 3.2 kg


Gearhead 1.5 kg

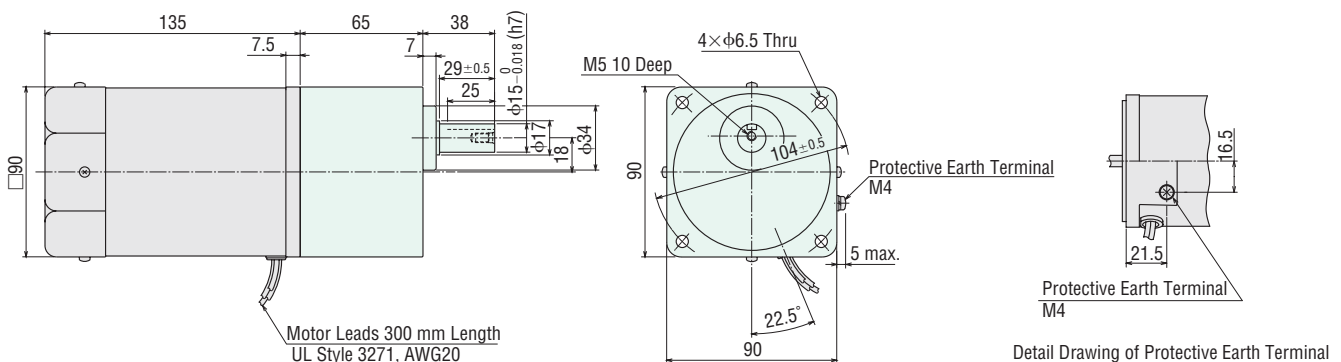

◇ Terminal Box Type ②


Mass: Motor 3.3 kg

Gearhead 1.5 kg

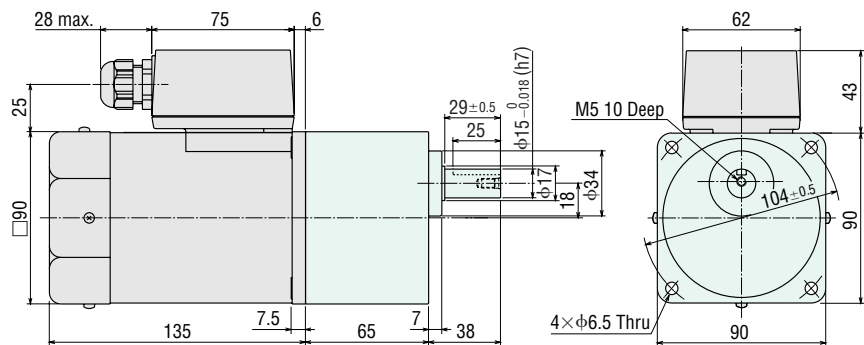

◇ Key and Key Slot


(The key is included with the gearhead)



● Use cable with a diameter of $\phi 6 \sim \phi 12$ mm.

◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

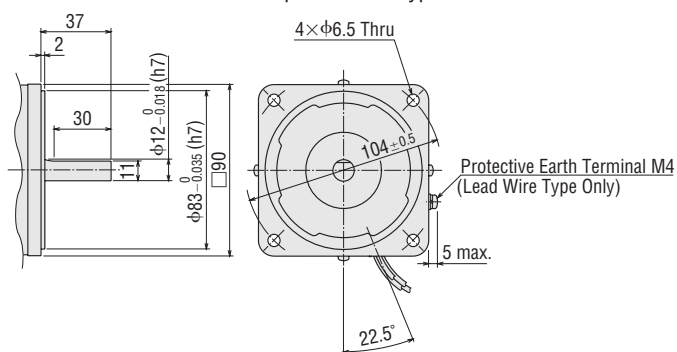


◇ Decimal Gearhead

Can be connected to **GE** pinion shaft type.


5GE10XS

Mass: 0.6 kg

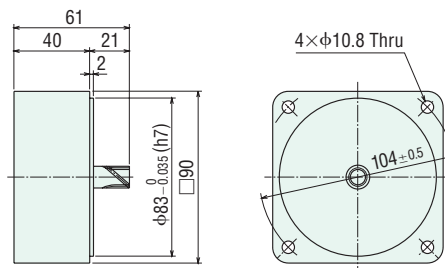

◇ Capacitor

(Included with single-phase motors)

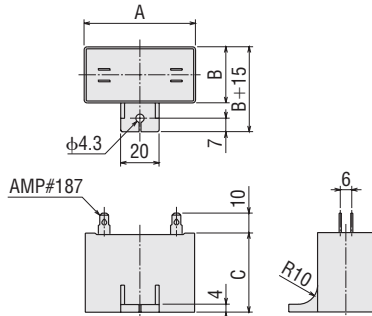

◇ Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Upper Model Name: Pinion Shaft Type	Lower Model Name (): Round Shaft Type						
Lead Wire Type	Terminal Box Type						
5IK90GE-AW2J (5IK90A-AW2J)	5IK90GE-AW2TJ (5IK90A-AW2TJ)	CH280CFAUL2	58	35	50	140	Included
5IK90GE-AW2U (5IK90A-AW2U)	5IK90GE-AW2TU (5IK90A-AW2TU)	CH200CFAUL2	58	29	41	95	
5IK90GE-CW2J (5IK90A-CW2J)	5IK90GE-CW2TJ (5IK90A-CW2TJ)	CH70BFAUL	58	35	50	130	
5IK90GE-CW2E (5IK90A-CW2E)	5IK90GE-CW2TE (5IK90A-CW2TE)	CH60BFAUL	58	29	41	85	

Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.


Lead Wire Type		Terminal Box Type	
5IK90GE-AW2 □ 5IK90GE-CW2 □	5IK90GE-SW2	5IK90GE-AW2T □ 5IK90GE-CW2T □	5IK90GE-SW2T 5IK90GE-UT4F
Clockwise 	Clockwise 	Clockwise 	Clockwise
Counterclockwise 	Counterclockwise To change the rotation direction, change any two connections between R, S and T.	Counterclockwise 	Counterclockwise To change the rotation direction, change any two connections between U, V and W.

PE: Protective Earth

Note:

Change the direction of single-phase motor rotation only after bringing the motor to a stop.

If an attempt is made to change the direction of rotation while the motor is rotating, motor may ignore reversing command or change its direction of rotation after some delay.

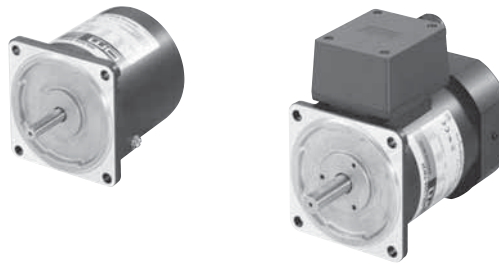

Specifications – Continuous Rating

● 40 W, 60 W (RoHS)



Model	Output Power	Voltage	Frequency	Current	Starting Torque	Rated Torque	Rated Speed	Capacitor		
									Round Shaft Type	W
TP 4IK40A-BW2J	40	Single-Phase 100	50	0.77	90	160	2400	9.0		
			60	0.73		135	2900			
TP 4IK40A-BW2U	40	Single-Phase 110	60	0.68	90	135	2900	7.5		
		Single-Phase 115		0.66						
TP 4IK40A-DW2J	40	Single-Phase 200	50	0.39	90	160	2400	2.3		
			60	0.37		135	2900			
TP 4IK40A-DW3E	36	Single-Phase 220	50	0.30	90	145	2400	1.8		
			60	0.31		120	2900			
	40	Single-Phase 230	50	0.33		160	2400			
			60	0.32		135	2900			
TP 4IK60A-BW2J	60	Single-Phase 100	50	1.09	160	230	2500	14		
			60	1.25		190	3000			
TP 4IK60A-BW2U	60	Single-Phase 110	60	0.98	160	190	3000	10		
		Single-Phase 115		0.97						
TP 4IK60A-DW2J	60	Single-Phase 200	50	0.54	160	230	2500	3.0		
			60	0.57		190	3000			
TP 4IK60A-DW3E	55	Single-Phase 220	50	0.44	160	210	2500	2.5		
			60	0.51		180	3000			
	60	Single-Phase 230	50	0.47		230	2500			
			60	0.52		190	3000			
TP 5IK60A-BW2J	60	Single-Phase 100	50	1.01	140	220	2650	16		
			60	1.03		185	3200			
TP 5IK60A-BW2U	60	Single-Phase 110	60	0.94	140	185	3200	14		
		Single-Phase 115		0.93						
TP 5IK60A-DW2J	60	Single-Phase 200	50	0.51	140	220	2650	4.0		
			60	0.52		185	3200			
TP 5IK60A-DW3E	60	Single-Phase 220	50	0.46	120	220	2650	3.0		
			60			185	3200			
	Single-Phase 230	50	0.45	140	220	2650				
		60			185	3200				
TP 5IK60A-TW2	60	Three-Phase 200	50	0.47	270	220	2650	-		
			60	0.40		230	185		3200	
			Three-Phase 220	60		0.42	230		185	3200
				60		0.44	230		185	3200

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops. When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

● 90 W, 150 W (RoHS)



Model	Output Power	Voltage	Frequency	Current	Starting Torque	Rated Torque	Rated Speed	Capacitor	
Round Shaft Type	W	VAC	Hz	A	mN-m	mN-m	r/min	μF	
TP 5IK90A-BW2J	90	Single-Phase 100	50	1.57	240	330	2650	28	
			60	1.85		280	3200		
TP 5IK90A-BW2U	90	Single-Phase 110	60	1.61	240	280	3200	25	
		Single-Phase 115		1.57					
TP 5IK90A-DW2J	90	Single-Phase 200	50	0.76	240	330	2650	7.0	
			60	0.90		280	3200		
TP 5IK90A-DW3E	90	Single-Phase 220	50	0.70	240	330	2650	6.0	
			60	0.84		280	3200		
			Single-Phase 230	50		0.69	330		2650
				60		0.84	280		3200
TP 5IK90A-TW2	90	Three-Phase 200	50	0.63	500	340	2600	-	
			60	0.55	400	285	3100		
		Three-Phase 220	60	0.57	400	285	3200		
			Three-Phase 230	60	0.59	400	285		3200
TP 5IK150A-BW2J	150	Single-Phase 100	50	2.39	380	560	2650	40	
			60	2.49		460	3200		
TP 5IK150A-BW2U	150	Single-Phase 110	60	2.12	380	460	3200	30	
		Single-Phase 115		2.09					
TP 5IK150A-DW2J	150	Single-Phase 200	50	1.16	380	560	2650	10	
			60	1.26		460	3200		
TP 5IK150A-DW3E	140	Single-Phase 220	50	0.98	380	510	2650	8.0	
			60	1.07		420	3200		
	150	Single-Phase 230	50	1.04		560	2650		
			60	1.13		460	3200		
TP 5IK150A-TW2 5IK150A-TW2T	150	Three-Phase 200	50	1.11	680	550	2650	-	
			60	0.93	570	460	3100		
		Three-Phase 220	60	0.97	570	460	3150		
			Three-Phase 230	60	1.01	570	460		3200

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

Product Line

● Motor (RoHS)

Output Power	Power Supply Voltage	Model
40 W	Single-Phase 100 VAC	4IK40A-BW2J
	Single-Phase 110/115 VAC	4IK40A-BW2U
	Single-Phase 200 VAC	4IK40A-DW2J
	Single-Phase 220/230 VAC	4IK40A-DW3E
60 W	Single-Phase 100 VAC	4IK60A-BW2J
	Single-Phase 110/115 VAC	4IK60A-BW2U
	Single-Phase 200 VAC	4IK60A-DW2J
	Single-Phase 220/230 VAC	4IK60A-DW3E
	Single-Phase 100 VAC	5IK60A-BW2J
	Single-Phase 110/115 VAC	5IK60A-BW2U
	Single-Phase 200 VAC	5IK60A-DW2J
	Single-Phase 220/230 VAC	5IK60A-DW3E
Three-Phase 200/220/230 VAC	5IK60A-TW2	

Output Power	Power Supply Voltage	Model
90 W	Single-Phase 100 VAC	5IK90A-BW2J
	Single-Phase 110/115 VAC	5IK90A-BW2U
	Single-Phase 200 VAC	5IK90A-DW2J
	Single-Phase 220/230 VAC	5IK90A-DW3E
150 W	Three-Phase 200/220/230 VAC	5IK90A-TW2
	Single-Phase 100 VAC	5IK150A-BW2J
	Single-Phase 110/115 VAC	5IK150A-BW2U
	Single-Phase 200 VAC	5IK150A-DW2J
	Single-Phase 220/230 VAC	5IK150A-DW3E
	Three-Phase 200/220/230 VAC	5IK150A-TW2
Three-Phase 200/220/230 VAC	5IK150A-TW2T	



Dimensions (Unit = mm)

● 40 W

◇ Motor

4IK40A-BW2J, 4IK40A-BW2U, 4IK40A-DW2J, 4IK40A-DW3E

Mass: 1.5 kg

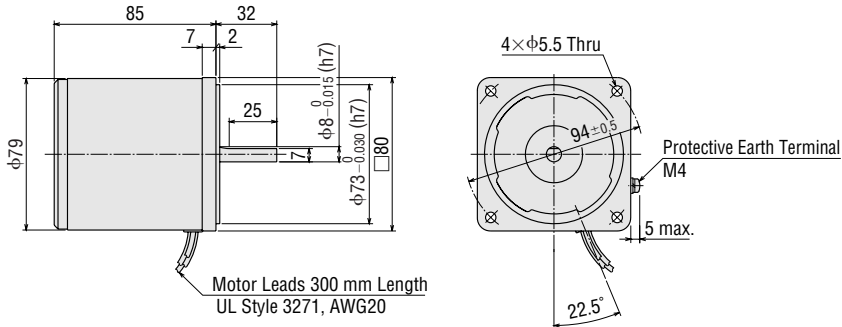



Detail Drawing of Protective Earth Terminal

● 60 W

◇ Motor

4IK60A-BW2J, 4IK60A-BW2U, 4IK60A-DW2J, 4IK60A-DW3E

Mass: 1.8 kg


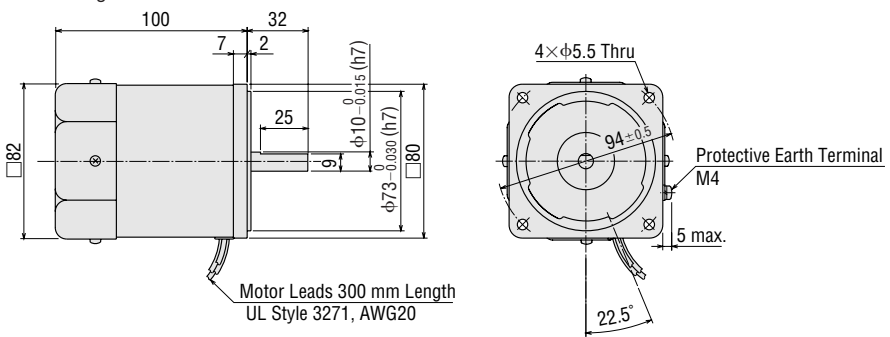


Detail Drawing of Protective Earth Terminal

◇ Motor

5IK60A-BW2J, 5IK60A-BW2U, 5IK60A-DW2J, 5IK60A-DW3E, 5IK60A-TW2

Mass: 2.5 kg

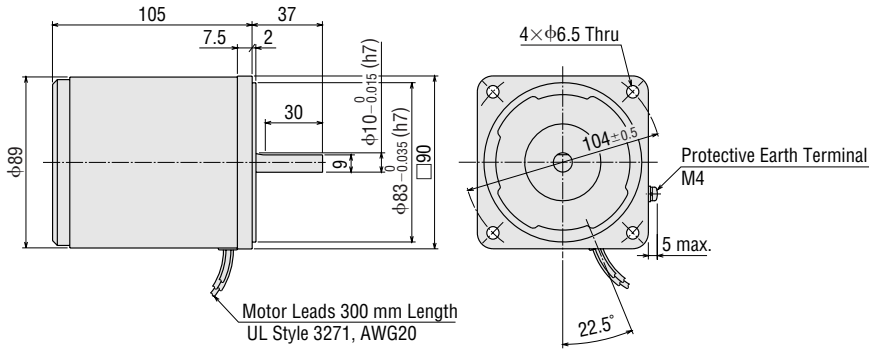



Detail Drawing of Protective Earth Terminal

● 90 W

◇ Motor

5IK90A-BW2J, 5IK90A-BW2U, 5IK90A-DW2J, 5IK90A-DW3E, 5IK90A-TW2

Mass: 2.7 kg

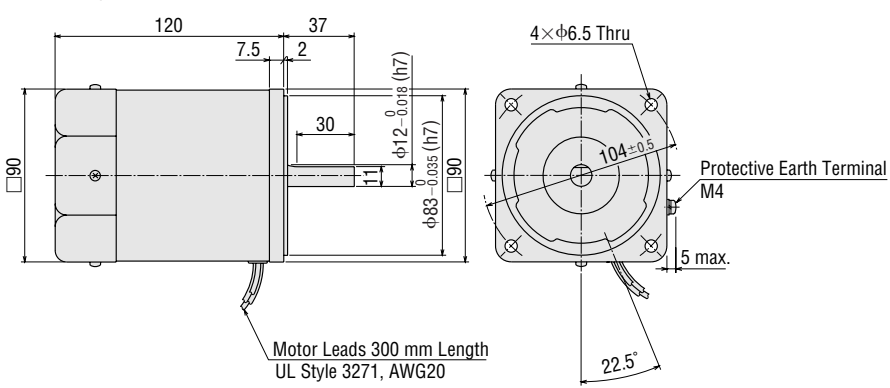



Detail Drawing of Protective Earth Terminal

● 150 W

◇ Motor

5IK150A-BW2J, 5IK150A-BW2U, 5IK150A-DW2J, 5IK150A-DW3E, 5IK150A-TW2

Mass: 3.2 kg

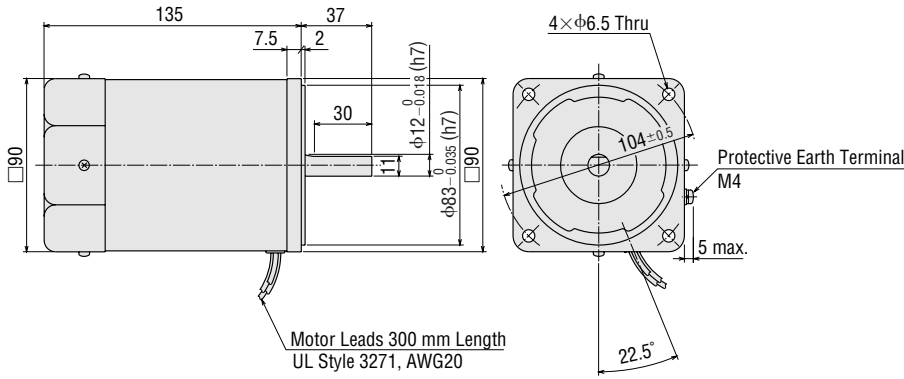


Detail Drawing of Protective Earth Terminal

◇ Motor


5IK150A-TW2T

Mass: 3.3 kg

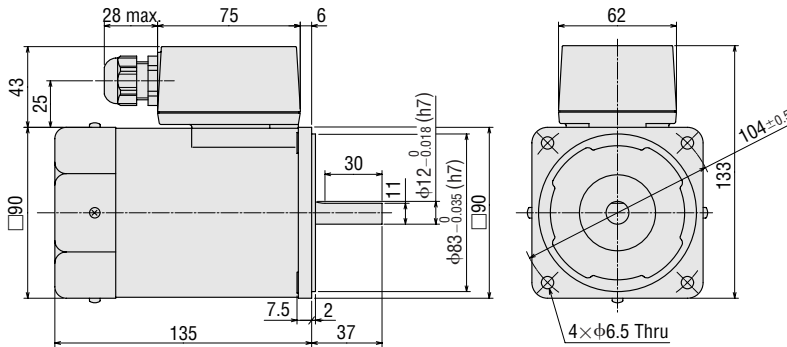

● Use cable with a diameter of $\phi 6 \sim \phi 12$ mm.

◇ Capacitor (Included with single-phase motors)

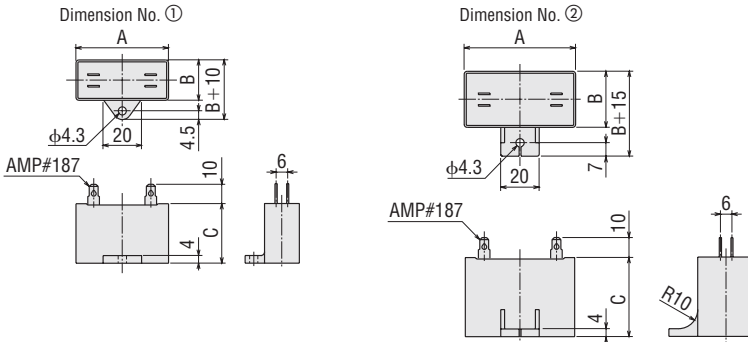

◇ Capacitor Dimensions (mm)

Model	Capacitor Model	A	B	C	Mass (g)	Dimension No.	Capacitor Cap
4IK40A-BW2J	CH90CFAUL2	48	22.5	31.5	45	①	Included
4IK40A-BW2U	CH75CFAUL2	48	21	31	45	①	
4IK40A-DW2J	CH23BFAUL	48	21	31	40	①	
4IK40A-DW3E	CH18BFAUL	38	21	31	35	①	
4IK60A-BW2J	CH140CFAUL2	58	22	35	61	①	
4IK60A-BW2U	CH100CFAUL2	58	21	31	50	①	
4IK60A-DW2J	CH30BFAUL	58	21	31	50	①	
4IK60A-DW3E	CH25BFAUL	48	21	31	45	①	
5IK60A-BW2J	CH160CFAUL2	58	23.5	37	75	②	
5IK60A-BW2U	CH140CFAUL2	58	22	35	61	①	
5IK60A-DW2J	CH40BFAUL	58	23.5	37	70	②	
5IK60A-DW3E	CH30BFAUL	58	21	31	50	①	
5IK90A-BW2J	CH280CFAUL2	58	35	50	140	②	
5IK90A-BW2U	CH250CFAUL2	58	35	50	140	②	
5IK90A-DW2J	CH70BFAUL	58	35	50	130	②	
5IK90A-DW3E	CH60BFAUL	58	29	41	85	②	
5IK150A-BW2J	CH400CFAUL2	58	41	58	180	②	
5IK150A-BW2U	CH300CFAUL2	58	35	50	140	②	
5IK150A-DW2J	CH100BFAUL	58	35	50	132	②	
5IK150A-DW3E	CH80BFAUL	58	35	50	130	②	

Connection Diagrams

The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.

Single-Phase 100 VAC, 110/115 VAC Single-Phase 200 VAC, 220/230 VAC	Three-Phase 200/220/230 VAC	
	5IK60A-TW2 5IK90A-TW2 5IK150A-TW2	5IK150A-TW2T
<p>Clockwise</p>	<p>Clockwise</p>	<p>Clockwise</p>
<p>Counterclockwise</p>	<p>Counterclockwise</p> <p>To change the rotation direction, change any two connections between R, S and T.</p>	<p>Counterclockwise</p> <p>To change the rotation direction, change any two connections between U, V and W.</p>


PE: Protective Earth

Note:

Change the direction of single-phase motor rotation only after bringing the motor to a stop.

If an attempt is made to change the direction of rotation while the motor is rotating, motor may ignore reversing command or change its direction of rotation after some delay.

Reversible Motors

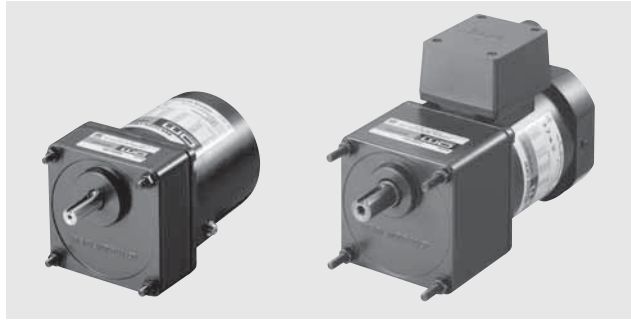

Features

● Optimal for Bi-Directional Operation

These are 30 minutes rated motors that can change directions instantaneously. They are designed for applications where reversal of direction is frequently required.

*30 minutes rating: The motors may be operated continuously for 30 minutes, but depending on operating conditions (intermittent operation, etc), they can be operated for more than 30 minutes.

Safety Standards and CE Marking

Standards	Certification Body	Standards File No.	CE Marking
UL 1004 UL 2111 CSA C22.2 No.100 CSA C22.2 No.77	UL	E64199 (1 W~6 W Type) E64197 (15 W~90 W Type)	Low Voltage Directives
EN 60950-1 EN 60034-1 EN 60034-5 IEC 60664-1		Conform to EN/IEC Standards	
GB 12350	CQC	2005010401150787 (Single-Phase 1 W Type) 2003010401091525 (Single-Phase 6 W Type) 2003010401091522 (Single-Phase 15 W~90 W Type)	

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

System Configuration

Mounting Brackets (Accessories)
(→ Page 121)

Flexible Couplings (Accessories)
(→ Page 123)

Brake Pack SB50W (Sold separately)
Equipped with instantaneous stopping functions, thermal protector open detection functions.
(→ Page 114)

Right-Angle Gearheads (Sold separately)
(→ Page 108)

Motor

AC Power Supply

Gearheads (Sold separately)

Capacitor Cap* (Included)
Insulating cap for capacitor terminal section.

Capacitor (Included)

● **Example of System Configuration**
(Body) (Sold separately)

Motor (Pinion Shaft) 4RK25GN-CW2E	+	Long Life/Low Noise GN-S Gearhead 4GN25S	Mounting Bracket SOL4M5	Flexible Coupling MCL301012
		⊙	○	○

⊙: Required under this system.
○: Selectable according to necessity. Oriental Motor provides.
*Capacitor cap is included.

● The system configuration shown above is an example. Other configurations are available.

Product Number Code

Motor

5 R K 40 GN - CW 2 T E

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Motor Frame Size	0: 42 mm 2: 60 mm 3: 70 mm 4: 80 mm 5: 90 mm
② Motor Type	R: Reversible Motor
③ Series	K: K Series
④ Output Power (W)	(Example) 40: 40 W
⑤ Motor Shaft Type	GN: GN Type Pinion Shaft GE: GE Type Pinion Shaft A: Round Shaft
⑥ Power Supply Voltage	AW: Single-Phase 100 VAC, 110/115 VAC CW: Single-Phase 200 VAC, 220/230 VAC
⑦	2, 3: RoHS-Compliant
⑧	T: Terminal Box Type
⑨ Included Capacitor	J: For Single-Phase 100 VAC, 200 VAC U: For Single-Phase 110/115 VAC E: For Single-Phase 220/230 VAC

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

(Example) Model: **5RK40GN-CW2E** → Motor nameplate and product approved under various safety standards: **5RK40GN-CW2**

Gearhead

5 GN 50 S

① ② ③ ④

① Gearhead Frame Size	0: 42 mm 2: 60 mm 3: 70 mm 4: 80 mm 5: 90 mm	
② Type of Pinion	GN: GN Type Pinion GE: GE Type Pinion	
③ Gear Ratio	(Example) 50: Gear Ratio of 1:50 10X denotes the decimal gearhead of gear ratio 1:10	
④	GN Type Pinion	S: Long Life/Low Noise GN-S Gearhead, RoHS-Compliant K: GN-K Gearhead RH: Right-Angle/Hollow Shaft Gearhead, RoHS-Compliant RA: Right-Angle/Solid Shaft Gearhead, RoHS-Compliant
	GE Type Pinion	S: Long Life GE-S Gearhead RH: Right-Angle/Hollow Shaft Gearhead, RoHS-Compliant RA: Right-Angle/Solid Shaft Gearhead, RoHS-Compliant

* **GN-K** gearhead of frame size 42 mm complies to RoHS directive.

General Specifications of Motors

1 W Type

Item	Specifications
Insulation Resistance	100 MΩ or more when 500 VDC megger is applied between the windings and the frame after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 1.5 kV at 50 Hz or 60 Hz applied between the windings and the frame for 1 minute after rated motor operation under normal ambient temperature and humidity.
Temperature Rise	Temperature rise of windings are 75°C or less measured by the resistance change method after rated motor operation under normal ambient temperature and humidity, with connecting a gearhead or equivalent heat radiation plate*.
Insulation Class	UL/CSA standards: Class A (105°C), EN standards: Class E (120°C)
Overheat Protection	Impedance protected
Ambient Temperature	-10°C~+40°C (nonfreezing)
Ambient Humidity	85% or less (noncondensing)
Degree of Protection	IP20

6 W~90 W Type

Item	Specifications
Insulation Resistance	100 MΩ or more when 500 VDC megger is applied between the windings and the frame after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 1.5 kV at 50 Hz or 60 Hz applied between the windings and the frame for 1 minute after rated motor operation under normal ambient temperature and humidity.
Temperature Rise	Temperature rise of windings are 80°C or less measured by the resistance change method after rated motor operation under normal ambient temperature and humidity, with connecting a gearhead or equivalent heat radiation plate*. However, a heat radiation plate that is 200×200 mm with a thickness of 5 mm is necessary even when the gearhead is connected for the 90 W type (200 VAC, 220/230 VAC).
Insulation Class	Class B (130°C)
Overheat Protection	6 W type has impedance protection. All others have built-in thermal protector (automatic return type) Operating temperature; open: 130°C ± 5°C, close: 82°C ± 15°C
Ambient Temperature	Single-phase 100 VAC, Single-phase 200 VAC: -10°C~+50°C (nonfreezing) Other voltage: -10°C~+40°C (nonfreezing)
Ambient Humidity	85% or less (noncondensing)
Degree of Protection	Lead Wire Type: IP20 Terminal Box Type: 6 W Type IP65 (excluding the installation surface of the round shaft type) 25 W, 40 W, 60 W, 90 W Type IP40

* Heat radiation plate (Material: Aluminum)

Motor Type	Size (mm)	Thickness (mm)
1 W Type	80×80	5
6 W Type	115×115	
15 W Type	125×125	
25 W Type	135×135	
40 W Type	165×165	
60 W Type 90 W Type (100 VAC, 110/115 VAC)	200×200	
90 W Type (200 VAC, 220/230 VAC)	200×200	10



(Gearhead sold separately)

Specifications – 30 Minutes Rating (RoHS)



Model Lead Wire Type		Output Power W	Voltage VAC	Frequency Hz	Current A	Starting Torque mN·m	Rated Torque mN·m	Rated Speed r/min	Capacitor μF
Pinion Shaft Type	Round Shaft Type								
ZP ORK1GN-AW2J	ORK1A-AW2J	1	Single-Phase 100	50	0.120	8	10	1000	1.8
				60	0.125		8	1200	
ZP ORK1GN-AW3U	ORK1A-AW3U	1	Single-Phase 110	60	0.090	8	8	1200	1.2
			Single-Phase 115		0.095				
ZP ORK1GN-CW2J	ORK1A-CW2J	1	Single-Phase 200	50	0.066	8	10	1000	0.45
				60	0.069		8	1200	

- Values shown for rated torque and starting torque are measured for operation without the friction brake installed.
- The **J** and **U** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.
- When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.
- ZP: Impedance protected

Product Line

Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	ORK1GN-AW2J	ORK1A-AW2J
	ORK1GN-AW3U	ORK1A-AW3U
	ORK1GN-CW2J	ORK1A-CW2J

Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Parallel Shaft	OGN□K	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

- Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads are sold separately. Decimal gearheads are not available.
- Enter the gear ratio in the box (□) within the model name.
- A colored background □ indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 33% less than the displayed value, depending on the size of the load.

◇ 50 Hz

Unit = N·m

Model Motor/Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
ORK1GN-AW2J / ORK1GN-CW2J	OGN□K	0.024	0.029	0.041	0.049	0.061	0.073	0.091	0.11	0.13	0.17	0.2	0.24	0.33	0.4	0.44	0.53	0.59	0.71	0.89	1

◇ 60 Hz

Unit = N·m

Model Motor/Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
ORK1GN-AW2J / ORK1GN-AW3U / ORK1GN-CW2J	OGN□K	0.019	0.023	0.032	0.039	0.049	0.058	0.073	0.088	0.11	0.13	0.16	0.19	0.26	0.32	0.35	0.42	0.47	0.57	0.71	0.85

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107


Dimensions (Unit = mm)

Mounting screws are included with gearheads.

Lead Wire Type

Mass: Motor 0.3 kg


Gearhead 0.2 kg

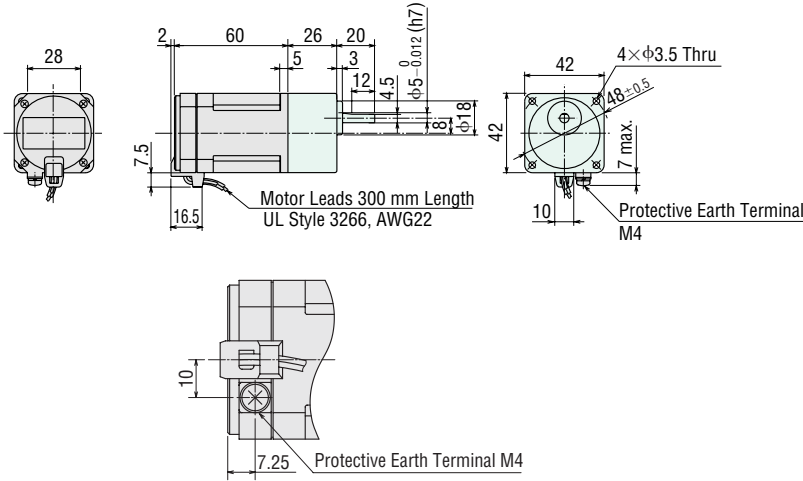


Detail Drawing of Protective Earth Terminal

Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

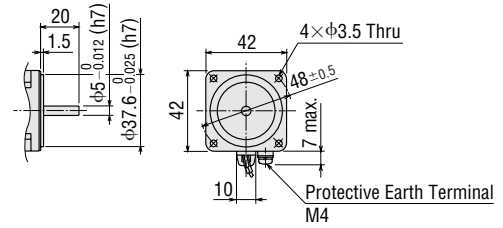

Capacitor (Included with the motors)




Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Pinion Shaft Type	Round Shaft Type						
ORK1GN-AW2J	ORK1A-AW2J	CH18FAUL	31	14.5	23.5	18	Included
ORK1GN-AW3U	ORK1A-AW3U	CH12FAUL	31	14.5	23.5	18	
ORK1GN-CW2J	ORK1A-CW2J	CH045BFAUL	31	17	27	24	

Connection Diagrams

● The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.

● Connection diagrams are also valid for the equivalent round shaft type.

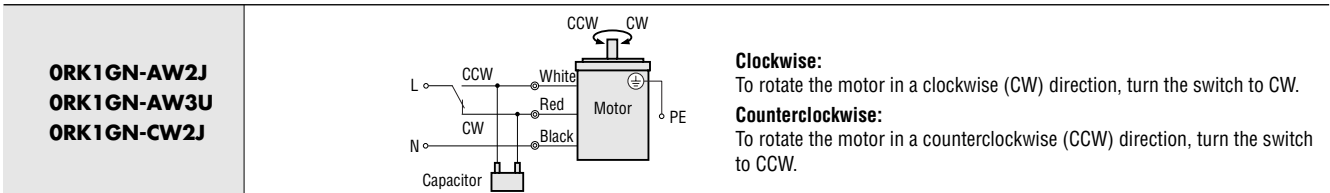


PE: Protective Earth

Note:

Connect a CR circuit to the forward/reverse select switch to protect the contact.

EPCR1201-2 is available as an optional surge suppressor. → Page 123

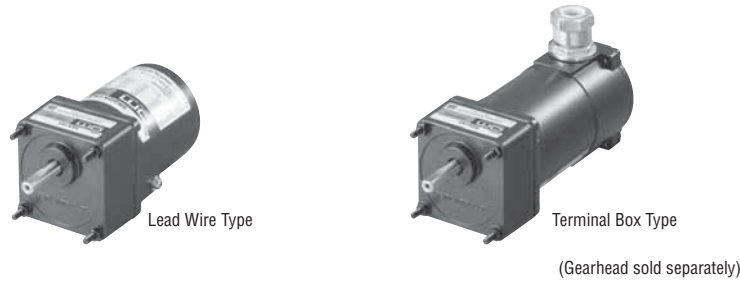

Specifications – 30 Minutes Rating (RoHS)



Model		Output Power	Voltage	Frequency	Current	Starting Torque	Rated Torque	Rated Speed	Capacitor
Upper Model Name: Pinion Shaft Type	Lower Model Name (): Round Shaft Type								
Lead Wire Type Dimension ①	Terminal Box Type Dimension ②	W	VAC	Hz	A	mN-m	mN-m	r/min	μF
Ⓜ 2RK6GN-AW2J (2RK6A-AW2J)	2RK6GN-AW2TJ (2RK6A-AW2TJ)	6	Single-Phase 100	50	0.257	50	49	1150	4.5
				60	0.307	45	41	1400	
Ⓜ 2RK6GN-AW2U (2RK6A-AW2U)	2RK6GN-AW2TU (2RK6A-AW2TU)	6	Single-Phase 110	60	0.251	45	41	1450	3.5
			Single-Phase 115						
Ⓜ 2RK6GN-CW2J (2RK6A-CW2J)	2RK6GN-CW2TJ (2RK6A-CW2TJ)	6	Single-Phase 200	50	0.120	50	49	1150	1.0
				60	0.138	45	41	1400	
Ⓜ 2RK6GN-CW2E (2RK6A-CW2E)	2RK6GN-CW2TE (2RK6A-CW2TE)	6	Single-Phase 220	50	0.113	45	49	1150	0.8
				60	0.117		41	1450	
			Single-Phase 230	50	0.117	50	49	1200	
				60	0.120	45	41	1450	

- Values shown for rated torque and starting torque are measured for operation without the friction brake installed.
- The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.
- Ⓜ: Impedance protected

Product Line

● Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	2RK6GN-AW2J	2RK6A-AW2J
	2RK6GN-AW2U	2RK6A-AW2U
	2RK6GN-CW2J	2RK6A-CW2J
	2RK6GN-CW2E	2RK6A-CW2E
Terminal Box	2RK6GN-AW2TJ	2RK6A-AW2TJ
	2RK6GN-AW2TU	2RK6A-AW2TU
	2RK6GN-CW2TJ	2RK6A-CW2TJ
	2RK6GN-CW2TE	2RK6A-CW2TE

● Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	2GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	2GN10XS	(Decimal gearhead)

- Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the code that represents the terminal box type "T" in the box (□) within the model name.
- Enter the gear ratio in the box (□) within the model name.
- A colored background □ indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 3 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
2RK6GN-AW2 □J 2RK6GN-CW2 □J 2RK6GN-CW2 □E	2GN □S	0.12	0.14	0.20	0.24	0.30	0.36	0.50	0.60	0.71	0.89	1.1	1.3	1.6	1.9	2.4	2.9	3	3	3	3

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
2RK6GN-AW2 □J 2RK6GN-AW2 □U 2RK6GN-CW2 □J 2RK6GN-CW2 □E	2GN □S	0.10	0.12	0.17	0.20	0.25	0.30	0.42	0.50	0.60	0.75	0.90	1.1	1.4	1.6	2.0	2.4	2.7	3	3	3

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107


Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type ①

Mass: Motor 0.7 kg


Gearhead 0.4 kg

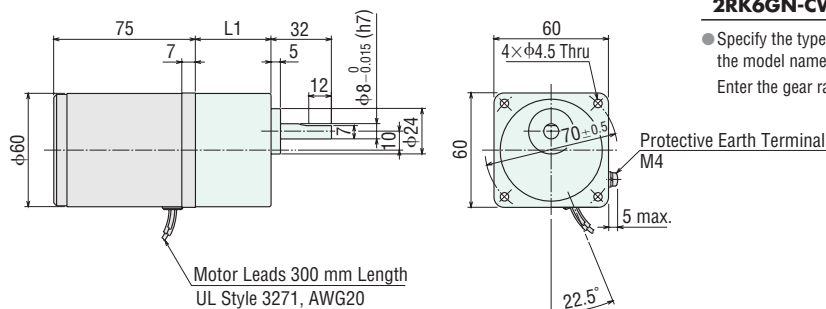Motor Leads 300 mm Length
UL Style 3271, AWG20

Motor Model	Gearhead Model	Gear Ratio	L1
2RK6GN-AW2 □	2GN □S	3~18	30
2RK6GN-CW2 □		25~180	40

- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.


Enter the gear ratio in the box (□) within the model name.



Detail Drawing of Protective Earth Terminal

◇ Terminal Box Type ②

Mass: Motor 0.9 kg
Gearhead 0.4 kg

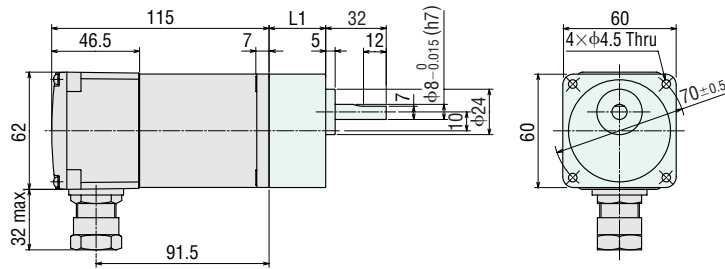


● Use cable with a diameter of φ8 ~ φ12 mm.

Motor Model	Gearhead Model	Gear Ratio	L1
2RK6GN-AW2T <input type="checkbox"/>	2GN <input type="checkbox"/> S	3~18	30
2RK6GN-CW2T <input type="checkbox"/>		25~180	40

● Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box within the model name.
Enter the gear ratio in the box within the model name.

◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

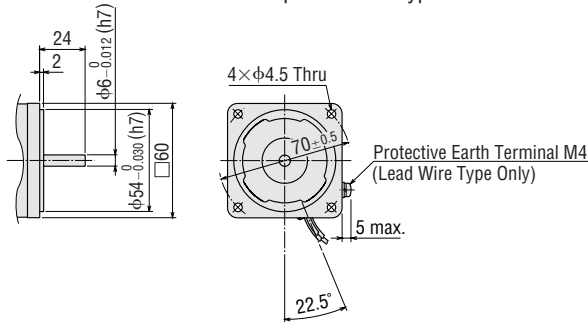


◇ Decimal Gearhead

Can be connected to **GN** pinion shaft type.


2GN10XS

Mass: 0.2 kg

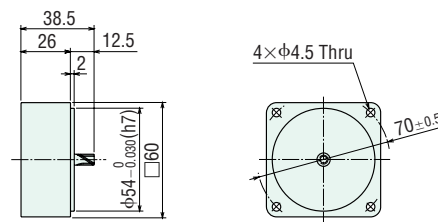

◇ Capacitor

(Included with the motors)




◇ Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Upper Model Name: Pinion Shaft Type	Lower Model Name (): Round Shaft Type						
Lead Wire Type	Terminal Box Type						Included
2RK6GN-AW2J (2RK6A-AW2J)	2RK6GN-AW2TJ (2RK6A-AW2TJ)	CH45FAUL2	37	18	27	30	
2RK6GN-AW2U (2RK6A-AW2U)	2RK6GN-AW2TU (2RK6A-AW2TU)	CH35FAUL2	31	17	27	25	
2RK6GN-CW2J (2RK6A-CW2J)	2RK6GN-CW2TJ (2RK6A-CW2TJ)	CH10BFAUL	37	18	27	30	
2RK6GN-CW2E (2RK6A-CW2E)	2RK6GN-CW2TE (2RK6A-CW2TE)	CH08BFAUL	31	17	27	20	

■ Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box within the model name.

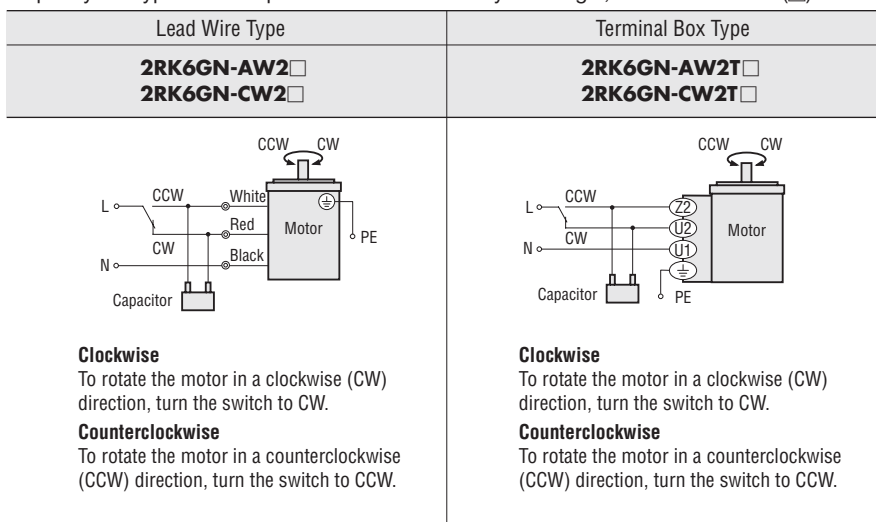

PE: Protective Earth

Note:

Connect a CR circuit to the forward/reverse select switch to protect the contact.

EPCR1201-2 is available as an optional surge suppressor. → Page 123

Reversible Motors

15 W

Frame Size: □70 mm



(Gearhead sold separately)

Specifications – 30 Minutes Rating (RoHS)



Model Lead Wire Type		Output Power W	Voltage VAC	Frequency Hz	Current A	Starting Torque mN·m	Rated Torque mN·m	Rated Speed r/min	Capacitor μF
Pinion Shaft Type	Round Shaft Type								
TP	3RK15GN-AW2J	15	Single-Phase 100	50	0.41	100	125	1200	7.5
				60	0.50		105	1450	
TP	3RK15GN-AW2U	15	Single-Phase 110	60	0.41	100	105	1450	6.0
			Single-Phase 115		0.41				
TP	3RK15GN-CW2J	15	Single-Phase 200	50	0.21	100	125	1200	1.8
				60	0.24		105	1450	
TP	3RK15GN-CW2E	15	Single-Phase 220	50	0.20	100	125	1200	1.5
				60	0.21		105	1450	
				50	0.20		125	1200	
				60	0.21		105	1450	

● Values shown for rated torque and starting torque are measured for operation without the friction brake installed.

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.

When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

Product Line

● Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	3RK15GN-AW2J	3RK15A-AW2J
	3RK15GN-AW2U	3RK15A-AW2U
	3RK15GN-CW2J	3RK15A-CW2J
	3RK15GN-CW2E	3RK15A-CW2E

● Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	3GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	3GN10XS (Decimal gearhead)	

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the gear ratio in the box (□) within the model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 5 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
3RK15GN-AW2J 3RK15GN-CW2J 3RK15GN-CW2E	3GN□S	 0.30	 0.36	 0.51	 0.61	 0.76	 0.91	 1.3	 1.5	 1.8	 2.3	 2.7	 3.3	 4.1	 5	 5	 5	 5	 5	 5	 5

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
3RK15GN-AW2J 3RK15GN-AW2U 3RK15GN-CW2J 3RK15GN-CW2E	3GN□S	 0.26	 0.31	 0.43	 0.51	 0.64	 0.77	 1.1	 1.3	 1.5	 1.9	 2.3	 2.8	 3.5	 4.2	 5	 5	 5	 5	 5	 5

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107




Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type

Mass: Motor 1.1 kg

Gearhead 0.55 kg

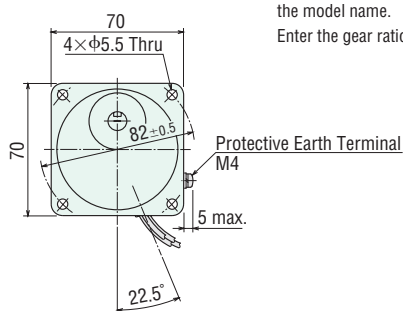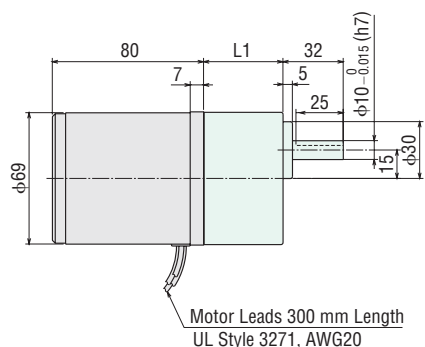


Motor Model	Gearhead Model	Gear Ratio	L1
3RK15GN-AW2 	3GN□S	3~18	32
3RK15GN-CW2 		25~180	42

- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.


Enter the gear ratio in the box (□) within the model name.

◇ Key and Key Slot (The key is included with the gearhead)



◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

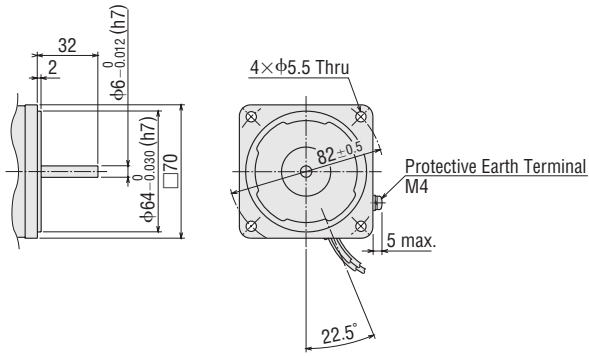


◇ Decimal Gearhead

Can be connected to **GN** pinion shaft type.


3GN10XS

Mass: 0.3 kg

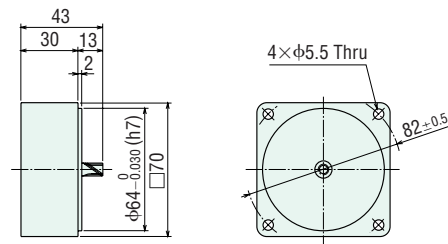

◇ Capacitor

(Included with the motors)




◇ Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Pinion Shaft Type	Round Shaft Type						
3RK15GN-AW2J	3RK15A-AW2J	CH75CFAUL2	48	21	31	45	Included
3RK15GN-AW2U	3RK15A-AW2U	CH60CFAUL2	38	21	31	40	
3RK15GN-CW2J	3RK15A-CW2J	CH18BFAUL	38	21	31	35	
3RK15GN-CW2E	3RK15A-CW2E	CH15BFAUL	38	21	31	35	

■ Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

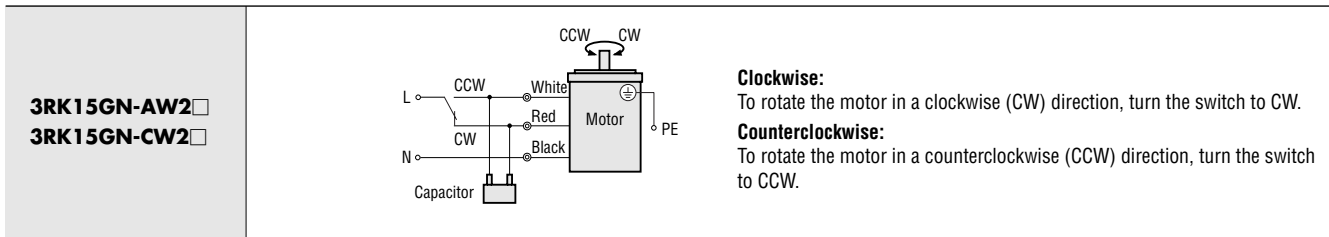


PE: Protective Earth

Note:

Connect a CR circuit to the forward/reverse select switch to protect the contact.

EPCR1201-2 is available as an optional surge suppressor. → Page 123

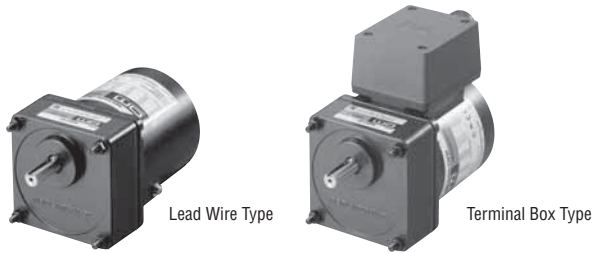


Lead Wire Type

Terminal Box Type

(Gearhead sold separately)

Right-angle gearheads (hollow shaft or solid shaft) can be combined.
Right-Angle Gearheads → Page 108



Specifications – 30 Minutes Rating (RoHS)



Model		Output Power	Voltage	Frequency	Current	Starting Torque	Rated Torque	Rated Speed	Capacitor
Upper Model Name: Pinion Shaft Type	Lower Model Name (): Round Shaft Type								
Lead Wire Type	Terminal Box Type	W	VAC	Hz	A	mN-m	mN-m	r/min	μF
Dimension ①	Dimension ②								
TP 4RK25GN-AW2J (4RK25A-AW2J)	4RK25GN-AW2TJ (4RK25A-AW2TJ)	25	Single-Phase 100	50	0.59	160	205	1200	10
				60	0.69	140	170	1450	
TP 4RK25GN-AW2U (4RK25A-AW2U)	4RK25GN-AW2TU (4RK25A-AW2TU)	25	Single-Phase 110	60	0.56	140	170	1450	8.0
			Single-Phase 115						
TP 4RK25GN-CW2J (4RK25A-CW2J)	4RK25GN-CW2TJ (4RK25A-CW2TJ)	25	Single-Phase 200	50	0.32	160	205	1200	3.0
				60	0.40	140	170	1450	
TP 4RK25GN-CW2E (4RK25A-CW2E)	4RK25GN-CW2TE (4RK25A-CW2TE)	25	Single-Phase 220	50	0.29	140	205	1200	2.5
				60	0.35		170	1450	
			Single-Phase 230	50	0.30	160	205	1200	
				60	0.35	140	170	1450	

- Values shown for rated torque and starting torque are measured for operation without the friction brake installed.
- The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.
- TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.
When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

Product Line

Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	4RK25GN-AW2J	4RK25A-AW2J
	4RK25GN-AW2U	4RK25A-AW2U
	4RK25GN-CW2J	4RK25A-CW2J
	4RK25GN-CW2E	4RK25A-CW2E
Terminal Box	4RK25GN-AW2TJ	4RK25A-AW2TJ
	4RK25GN-AW2TU	4RK25A-AW2TU
	4RK25GN-CW2TJ	4RK25A-CW2TJ
	4RK25GN-CW2TE	4RK25A-CW2TE

Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	4GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	4GN10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	4GN□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	4GN□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the code that represents the terminal box type "T" in the box (□) within the model name.
- Enter the gear ratio in the box (□) within the model name.
- A colored background □ indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 8 N·m. When a gearhead of 1/25~1/36 is connected, the value for permissible torque is 6 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
4RK25GN-AW2 □J 4RK25GN-CW2 □J 4RK25GN-CW2 □E	4GN □S	0.50	0.60	0.83	1.0	1.2	1.5	2.1	2.5	3.0	3.7	4.5	5.4	6.8	8	8	8	8	8	8	8

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
4RK25GN-AW2 □J 4RK25GN-AW2 □U 4RK25GN-CW2 □J 4RK25GN-CW2 □E	4GN □S	0.41	0.50	0.69	0.83	1.0	1.2	1.7	2.1	2.5	3.1	3.7	4.5	5.6	6.7	8	8	8	8	8	8

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107
Gearhead → Page 107

Permissible Load Inertia J for Gearhead




→ Page 107

Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type ①

Mass: Motor 1.5 kg
Gearhead 0.65 kg

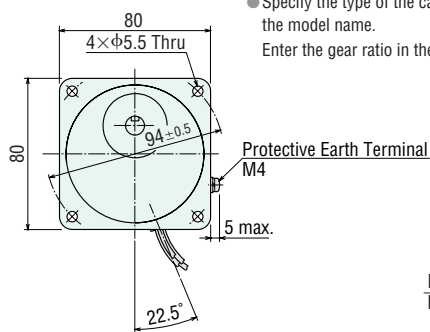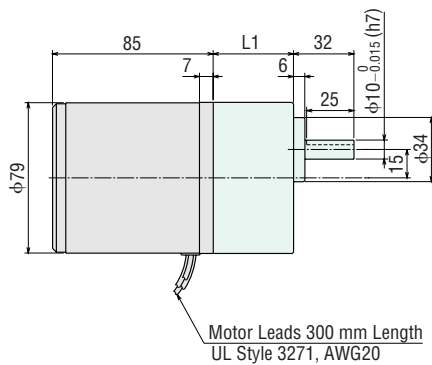

Detail Drawing of Protective Earth Terminal

Motor Model	Gearhead Model	Gear Ratio	L1
4RK25GN-AW2 □J 4RK25GN-CW2 □J	4GN □S	3~18	32
		25~180	42.5


- Specify the type of the capacitor to be included by entering J, U or E in the box (□) within the model name.
- Enter the gear ratio in the box (□) within the model name.

RoHS

Reversible Motors

40 W


Frame Size: □90 mm

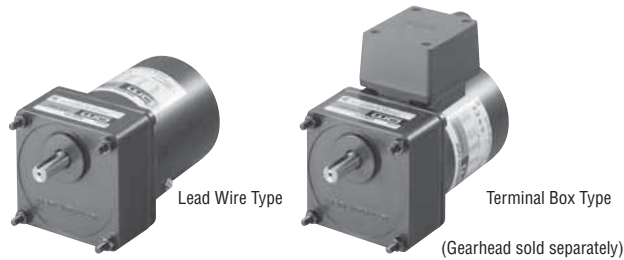

(Gearhead sold separately)

Right-angle gearheads (hollow shaft or solid shaft) can be combined.

Right-Angle Gearheads → Page 108



Specifications – 30 Minutes Rating (RoHS)



Model Upper Model Name: Pinion Shaft Type Lower Model Name (): Round Shaft Type		Output Power	Voltage	Frequency	Current	Starting Torque	Rated Torque	Rated Speed	Capacitor
Lead Wire Type Dimension ①	Terminal Box Type Dimension ②	W	VAC	Hz	A	mN·m	mN·m	r/min	μF
TP 5RK40GN-AW2J (5RK40A-AW2J)	5RK40GN-AW2TJ (5RK40A-AW2TJ)	40	Single-Phase 100	50	0.91	300	315	1250	16
				60	1.09	260	270	1450	
TP 5RK40GN-AW2U (5RK40A-AW2U)	5RK40GN-AW2TU (5RK40A-AW2TU)	40	Single-Phase 110	60	0.88	260	270	1450	12
			Single-Phase 115		0.87				
TP 5RK40GN-CW2J (5RK40A-CW2J)	5RK40GN-CW2TJ (5RK40A-CW2TJ)	40	Single-Phase 200	50	0.46	270	315	1250	4.0
				60	0.55	260	260	1500	
TP 5RK40GN-CW2E (5RK40A-CW2E)	5RK40GN-CW2TE (5RK40A-CW2TE)	40	Single-Phase 220	50	0.43	270	315	1250	3.5
				60	0.48	260	260	1500	
				50	0.43	270	315	1250	
				60	0.48	260	260	1500	

● Values shown for rated torque and starting torque are measured for operation without the friction brake installed.

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.● **TP**: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

Product Line

● Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	5RK40GN-AW2J	5RK40A-AW2J
	5RK40GN-AW2U	5RK40A-AW2U
	5RK40GN-CW2J	5RK40A-CW2J
	5RK40GN-CW2E	5RK40A-CW2E
Terminal Box	5RK40GN-AW2TJ	5RK40A-AW2TJ
	5RK40GN-AW2TU	5RK40A-AW2TU
	5RK40GN-CW2TJ	5RK40A-CW2TJ
	5RK40GN-CW2TE	5RK40A-CW2TE

● Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	5GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GN10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	5GN□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	5GN□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the code that represents the terminal box type "T" in the box (□) within the model name.
- Enter the gear ratio in the box (□) within the model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 10 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5RK40GN-AW2 □J 5RK40GN-CW2 □J 5RK40GN-CW2 □E	5GN □S	0.77	0.92	1.3	1.5	1.9	2.3	3.2	3.8	4.6	5.7	6.9	8.3	10	10	10	10	10	10	10	10

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5RK40GN-AW2 □J 5RK40GN-AW2 □U	5GN □S	0.66	0.79	1.1	1.3	1.6	2.0	2.7	3.3	3.9	4.9	5.9	7.1	8.9	10	10	10	10	10	10	10
5RK40GN-CW2 □J 5RK40GN-CW2 □E	5GN □S	0.63	0.76	1.1	1.3	1.6	1.9	2.6	3.2	3.8	4.7	5.7	6.8	8.6	10	10	10	10	10	10	10

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107

Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type ①




Mass: Motor 2.5 kg

Gearhead 1.5 kg

Motor Model	Gearhead Model	Gear Ratio	L1
5RK40GN-AW2 □	5GN □S	3~18	42
5RK40GN-CW2 □		25~180	60

- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

Enter the gear ratio in the box (□) within the model name.

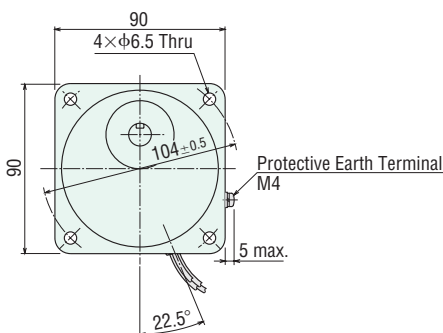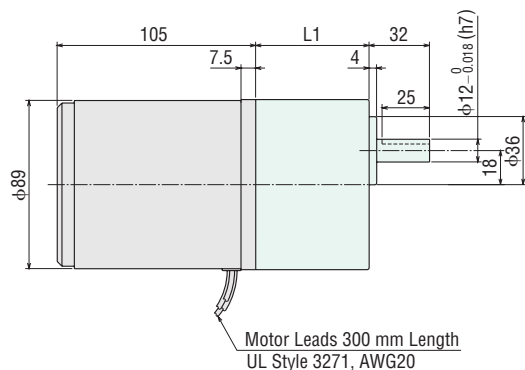


◇ Terminal Box Type ②

Mass: Motor 2.6 kg
Gearhead 1.5 kg

Motor Model	Gearhead Model	Gear Ratio	L1
5RK40GN-AW2T	5GN□S	3~18	42
5RK40GN-CW2T		25~180	60


Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.
Enter the gear ratio in the box (□) within the model name.

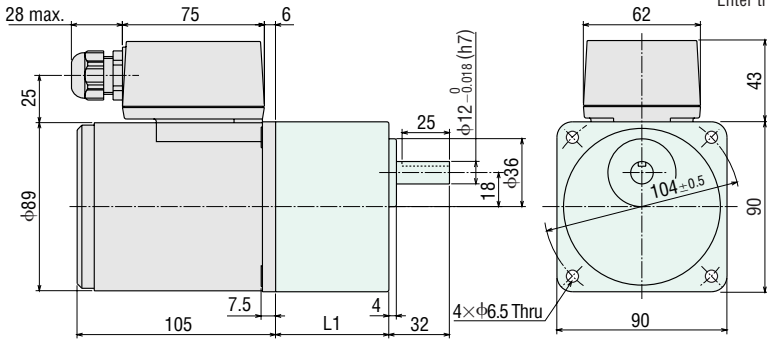

● Use cable with a diameter of φ6 ~ φ12 mm.


◇ Key and Key Slot

(The key is included with the gearhead)



◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

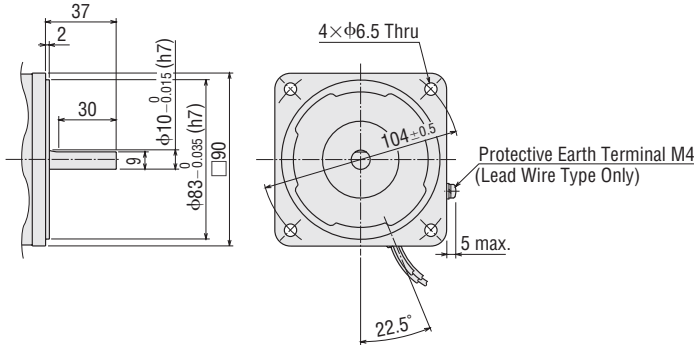


◇ Decimal Gearhead


Can be connected to **GN** pinion shaft type.

5GN10XS

Mass: 0.6 kg

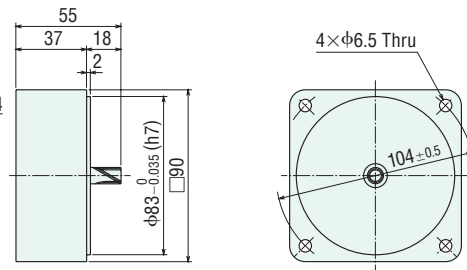

◇ Capacitor (Included with the motors)


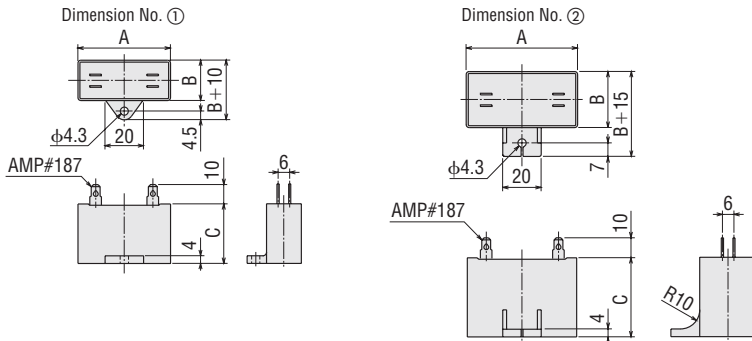


◇ Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Dimension No.	Capacitor Cap
Upper Model Name: Pinion Shaft Type	Lower Model Name (): Round Shaft Type							
Lead Wire Type	Terminal Box Type							
5RK40GN-AW2J (5RK40A-AW2J)	5RK40GN-AW2TJ (5RK40A-AW2TJ)	CH160CFAUL2	58	23.5	37	75	②	Included
5RK40GN-AW2U (5RK40A-AW2U)	5RK40GN-AW2TU (5RK40A-AW2TU)	CH120CFAUL2	58	22	35	60	①	
5RK40GN-CW2J (5RK40A-CW2J)	5RK40GN-CW2TJ (5RK40A-CW2TJ)	CH40BFAUL	58	23.5	37	70	②	
5RK40GN-CW2E (5RK40A-CW2E)	5RK40GN-CW2TE (5RK40A-CW2TE)	CH35BFAUL	58	22	35	55	①	

Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

Lead Wire Type	Terminal Box Type
5RK40GN-AW2 □ 5RK40GN-CW2 □	5RK40GN-AW2T □ 5RK40GN-CW2T □
 <p>Clockwise To rotate the motor in a clockwise (CW) direction, turn the switch to CW.</p> <p>Counterclockwise To rotate the motor in a counterclockwise (CCW) direction, turn the switch to CCW.</p>	 <p>Clockwise To rotate the motor in a clockwise (CW) direction, turn the switch to CW.</p> <p>Counterclockwise To rotate the motor in a counterclockwise (CCW) direction, turn the switch to CCW.</p>

PE: Protective Earth

Note:

Connect a CR circuit to the forward/reverse select switch to protect the contact.


EPCR1201-2 is available as an optional surge suppressor. → Page 123




Reversible Motors

60 W

Frame Size: □90 mm

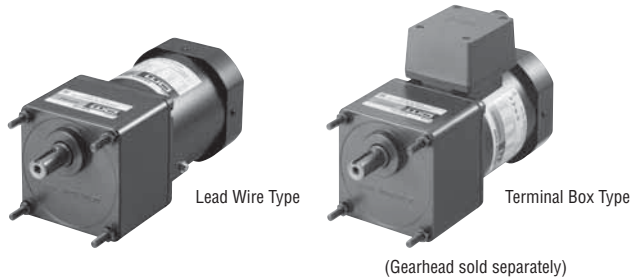

Right-angle gearheads (hollow shaft or solid shaft) can be combined.
Right-Angle Gearheads → Page 108

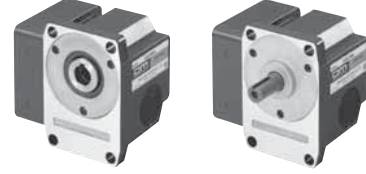

Specifications – 30 Minutes Rating (RoHS)



Model Upper Model Name: Pinion Shaft Type Lower Model Name (): Round Shaft Type		Output Power	Voltage	Frequency	Current	Starting Torque	Rated Torque	Rated Speed	Capacitor
Lead Wire Type Dimension ①	Terminal Box Type Dimension ②	W	VAC	Hz	A	mN·m	mN·m	r/min	μF
TP 5RK60GE-AW2J (5RK60A-AW2J)	5RK60GE-AW2TJ (5RK60A-AW2TJ)	60	Single-Phase 100	50	1.35	470	490	1200	25
				60	1.52	380	405	1450	
TP 5RK60GE-AW2U (5RK60A-AW2U)	5RK60GE-AW2TU (5RK60A-AW2TU)	60	Single-Phase 110	60	1.27	380	405	1450	20
			Single-Phase 115						
TP 5RK60GE-CW2J (5RK60A-CW2J)	5RK60GE-CW2TJ (5RK60A-CW2TJ)	60	Single-Phase 200	50	0.66	450	490	1200	6.0
				60	0.79	380	405	1450	
TP 5RK60GE-CW2E (5RK60A-CW2E)	5RK60GE-CW2TE (5RK60A-CW2TE)	60	Single-Phase 220	50	0.61	420	490	1200	5.0
				60	0.67	380	405	1450	
				50	0.63	470	490	1200	
				60	0.66	380	405	1450	

- Values shown for rated torque and starting torque are measured for operation without the friction brake installed.
- The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.
- **TP**: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.
When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

Product Line

● Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	5RK60GE-AW2J	5RK60A-AW2J
	5RK60GE-AW2U	5RK60A-AW2U
	5RK60GE-CW2J	5RK60A-CW2J
	5RK60GE-CW2E	5RK60A-CW2E
Terminal Box	5RK60GE-AW2TJ	5RK60A-AW2TJ
	5RK60GE-AW2TU	5RK60A-AW2TU
	5RK60GE-CW2TJ	5RK60A-CW2TJ
	5RK60GE-CW2TE	5RK60A-CW2TE

● Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/ Parallel Shaft	5GE□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GE10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	5GE□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	5GE□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the code that represents the terminal box type "T" in the box (□) within the model name.
- Enter the gear ratio in the box (□) within the model name.
- A colored background (□) indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 20 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5RK60GE-AW2 □J 5RK60GE-CW2 □J 5RK60GE-CW2 □E	5GE □S	1.2	1.4	2.0	2.4	3.0	3.6	4.5	5.4	6.4	8.1	9.7	11.6	16.2	19.4	20	20	20	20	20	20

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5RK60GE-AW2 □J 5RK60GE-AW2 □U 5RK60GE-CW2 □J 5RK60GE-CW2 □E	5GE □S	0.98	1.2	1.6	2.0	2.5	3.0	3.7	4.4	5.3	6.7	8.0	9.6	13.4	16.0	17.9	20	20	20	20	20

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107


Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type ①


Mass: Motor 2.7 kg

Gearhead 1.5 kg

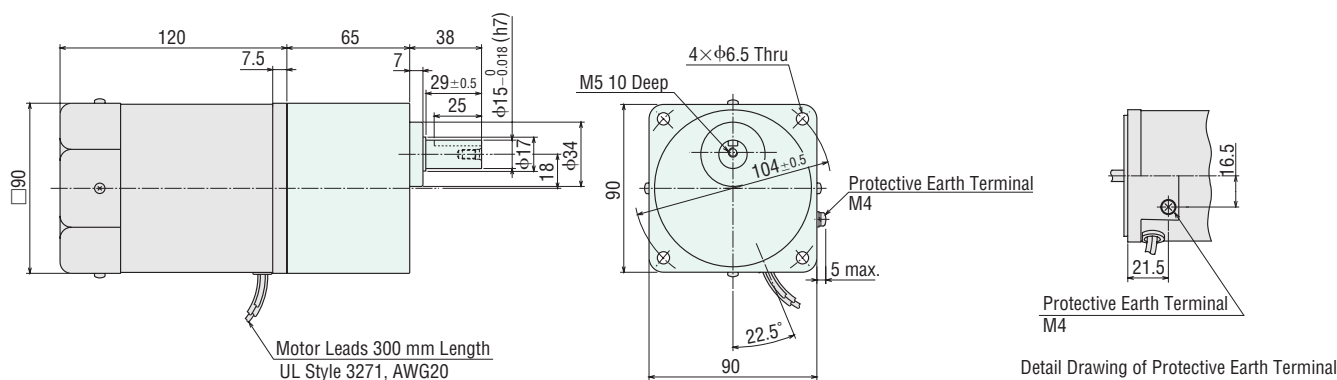


◇ Terminal Box Type ②

Mass: Motor 2.8 kg
Gearhead 1.5 kg

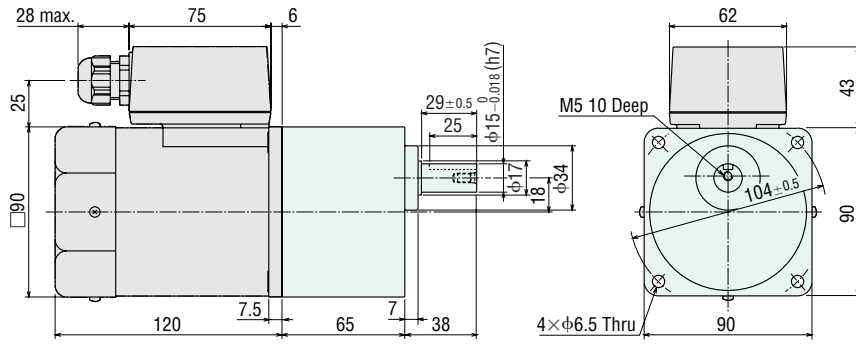

◇ Key and Key Slot


(The key is included with the gearhead)



● Use cable with a diameter of φ6 ~ φ12 mm.

◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

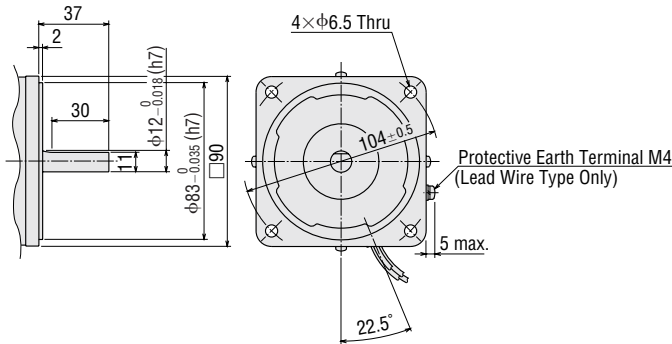


◇ Decimal Gearhead

Can be connected to **GE** pinion shaft type.


5GE10XS

Mass: 0.6 kg

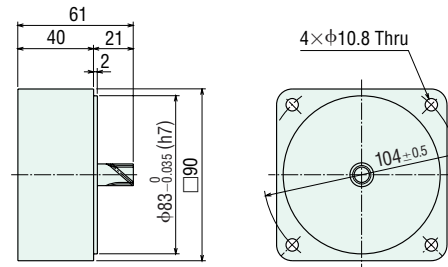

◇ Capacitor

(Included with the motors)

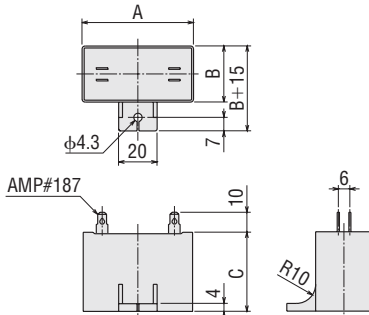


◇ Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Upper Model Name: Pinion Shaft Type	Lower Model Name (): Round Shaft Type						
Lead Wire Type	Terminal Box Type						
5RK60GE-AW2J (5RK60A-AW2J)	5RK60GE-AW2TJ (5RK60A-AW2TJ)	CH250CFAUL2	58	35	50	140	Included
5RK60GE-AW2U (5RK60A-AW2U)	5RK60GE-AW2TU (5RK60A-AW2TU)	CH200CFAUL2	58	29	41	95	
5RK60GE-CW2J (5RK60A-CW2J)	5RK60GE-CW2TJ (5RK60A-CW2TJ)	CH60BFAUL	58	29	41	85	
5RK60GE-CW2E (5RK60A-CW2E)	5RK60GE-CW2TE (5RK60A-CW2TE)	CH50BFAUL	58	29	41	85	

■ Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

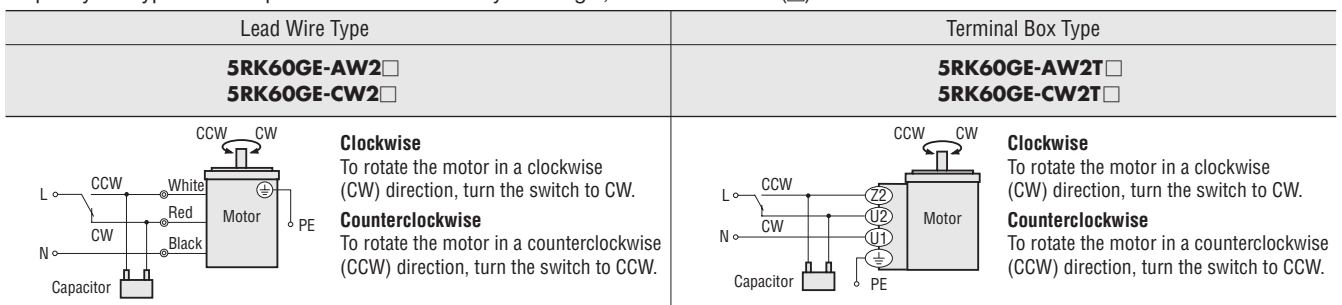


PE: Protective Earth


Note:

Connect a CR circuit to the forward/reverse select switch to protect the contact.

EPCR1201-2 is available as an optional surge suppressor. → Page 123

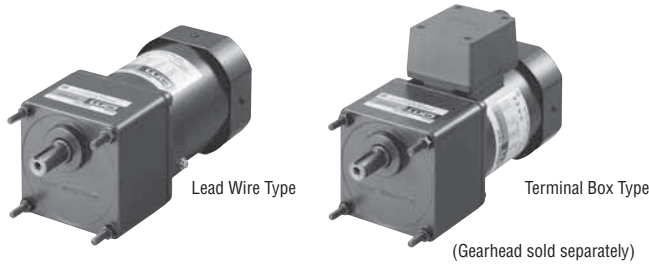

Right-angle gearheads (hollow shaft or solid shaft) can be combined.
Right-Angle Gearheads → Page 108

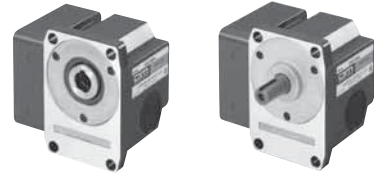

Specifications – 30 Minutes Rating (RoHS)



Model		Output Power	Voltage	Frequency	Current	Starting Torque	Rated Torque	Rated Speed	Capacitor
Upper Model Name: Pinion Shaft Type Lower Model Name (): Round Shaft Type									
Lead Wire Type Dimension ①	Terminal Box Type Dimension ②	W	VAC	Hz	A	mN-m	mN-m	r/min	μF
TP 5RK90GE-AW2J (5RK90A-AW2J)	5RK90GE-AW2TJ (5RK90A-AW2TJ)	90	Single-Phase 100	50	1.85	630	700	1250	35
				60	2.16	590	585	1500	
TP 5RK90GE-AW2U (5RK90A-AW2U)	5RK90GE-AW2TU (5RK90A-AW2TU)	90	Single-Phase 110 Single-Phase 115	60	1.87	590	585	1500	30
					1.86				
TP 5RK90GE-CW2J (5RK90A-CW2J)	5RK90GE-CW2TJ (5RK90A-CW2TJ)	90	Single-Phase 200	50	0.91	600	730	1200	8.0
				60	1.09	590	605	1450	
TP 5RK90GE-CW3E (5RK90A-CW3E)	5RK90GE-CW3TE (5RK90A-CW3TE)	90	Single-Phase 220 Single-Phase 230	50	0.83	600	730	1200	7.0
				60	0.96	590	605	1450	
				50	0.83	600	730	1200	
				60	0.95	590	605	1450	

- Values shown for rated torque and starting torque are measured for operation without the friction brake installed.
- The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.
- TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops. When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

Product Line

● Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	5RK90GE-AW2J	5RK90A-AW2J
	5RK90GE-AW2U	5RK90A-AW2U
	5RK90GE-CW2J	5RK90A-CW2J
	5RK90GE-CW3E	5RK90A-CW3E
Terminal Box	5RK90GE-AW2TJ	5RK90A-AW2TJ
	5RK90GE-AW2TU	5RK90A-AW2TU
	5RK90GE-CW2TJ	5RK90A-CW2TJ
	5RK90GE-CW3TE	5RK90A-CW3TE

● Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/ Parallel Shaft	5GE□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GE10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	5GE□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	5GE□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the code that represents the terminal box type "T" in the box (□) within the model name.
- Enter the gear ratio in the box (□) within the model name.
- A colored background □ indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 20 N·m.

◇ 50 Hz

Unit = N·m

Model	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
5RK90GE-AW2 □□ J	5GE □□ S	1.7	2.0	2.8	3.4	4.3	5.1	6.4	7.7	9.2	11.6	13.9	16.6	20	20	20	20	20	20	20	20
5RK90GE-CW2 □□ J 5RK90GE-CW3 □□ E	5GE □□ S	1.8	2.1	3.0	3.5	4.4	5.3	6.7	8.0	9.6	12.0	14.5	17.3	20	20	20	20	20	20	20	20

◇ 60 Hz

Unit = N·m

Model	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
5RK90GE-AW2 □□ J 5RK90GE-AW2 □□ U	5GE □□ S	1.4	1.7	2.4	2.8	3.6	4.3	5.3	6.4	7.7	9.7	11.6	13.9	19.3	20	20	20	20	20	20	20
5RK90GE-CW2 □□ J 5RK90GE-CW3 □□ E	5GE □□ S	1.5	1.8	2.5	2.9	3.7	4.4	5.5	6.6	7.9	10.0	12.0	14.4	20	20	20	20	20	20	20	20

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107


Dimensions (Unit = mm)

Mounting screws are included with gearheads.

◇ Lead Wire Type ①

Mass: Motor 3.2 kg


Gearhead 1.5 kg

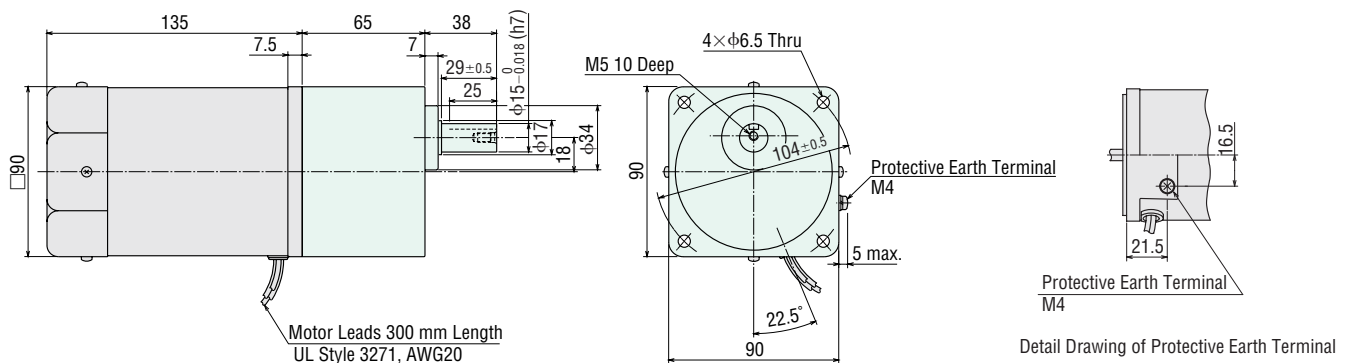

◇ Terminal Box Type ②


Mass: Motor 3.3 kg

Gearhead 1.5 kg

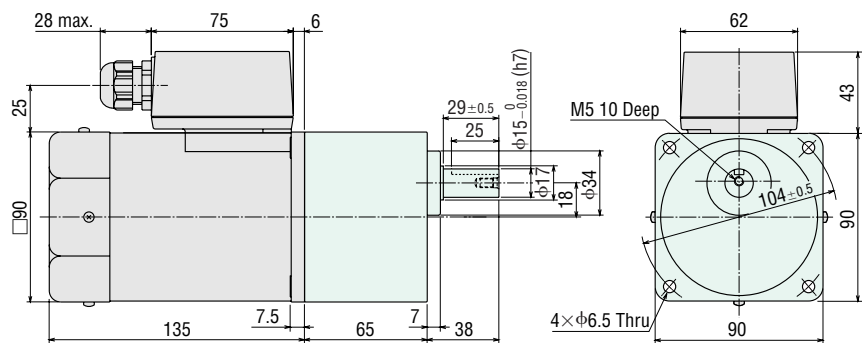● Use cable with a diameter of $\phi 6 \sim \phi 12$ mm.


◇ Key and Key Slot

(The key is included with the gearhead)



◇ Shaft Section of Round Shaft Type


The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

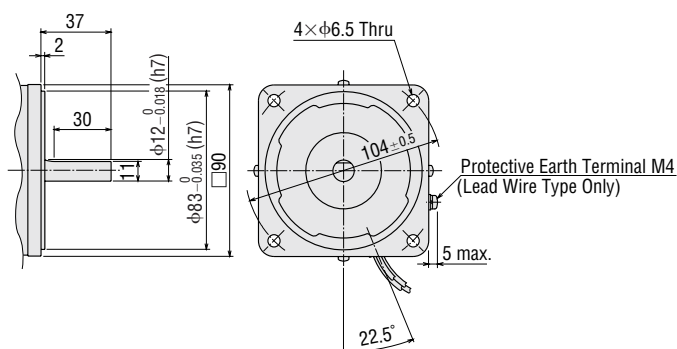

◇ Decimal Gearhead


Can be connected to **GE** pinion shaft type.**5GE10XS**

Mass: 0.6 kg

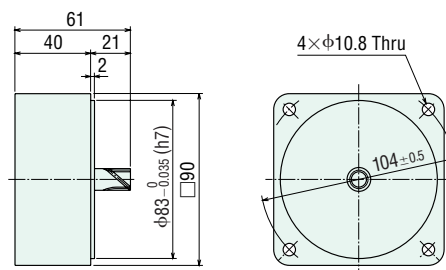

◇ Capacitor

(Included with the motors)


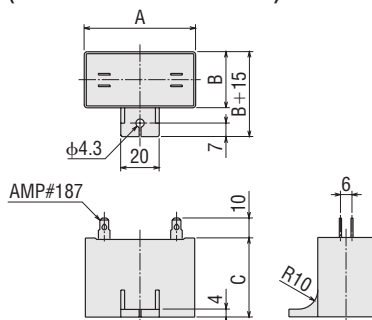


◇ Capacitor Dimensions (mm)

Model Upper Model Name: Pinion Shaft Type Lower Model Name (): Round Shaft Type		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Lead Wire Type	Terminal Box Type						
5RK90GE-AW2J (5RK90A-AW2J)	5RK90GE-AW2TJ (5RK90A-AW2TJ)	CH350CFAUL2	58	41	58	180	Included
5RK90GE-AW2U (5RK90A-AW2U)	5RK90GE-AW2TU (5RK90A-AW2TU)	CH300CFAUL2	58	35	50	140	
5RK90GE-CW2J (5RK90A-CW2J)	5RK90GE-CW2TJ (5RK90A-CW2TJ)	CH80BFAUL	58	35	50	130	
5RK90GE-CW3E (5RK90A-CW3E)	5RK90GE-CW3TE (5RK90A-CW3TE)	CH70BFAUL	58	35	50	130	

Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J** or **U** in the box (□) within the model name.

Lead Wire Type	Terminal Box Type
5RK90GE-AW2 □ 5RK90GE-CW2J 5RK90GE-CW3E	5RK90GE-AW2T □ 5RK90GE-CW2TJ 5RK90GE-CW3TE
 <p>Clockwise To rotate the motor in a clockwise (CW) direction, turn the switch to CW.</p> <p>Counterclockwise To rotate the motor in a counterclockwise (CCW) direction, turn the switch to CCW.</p>	 <p>Clockwise To rotate the motor in a clockwise (CW) direction, turn the switch to CW.</p> <p>Counterclockwise To rotate the motor in a counterclockwise (CCW) direction, turn the switch to CCW.</p>


PE: Protective Earth

Note:

Connect a CR circuit to the forward/reverse select switch to protect the contact.

EPCR1201-2 is available as an optional surge suppressor. → Page 123

Electromagnetic Brake Motors

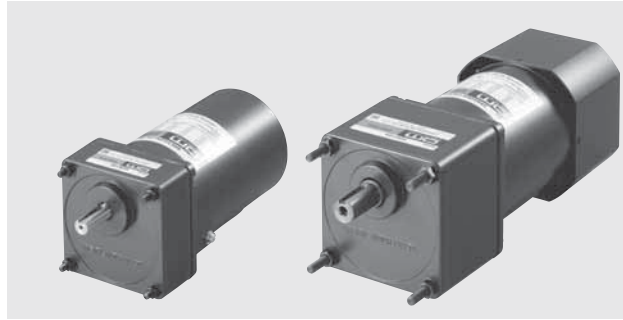

Features

Power Off Activated Type Electromagnetic Brake

These motors are directly coupled to an AC electromagnetic brake which is activated when power is not applied. When the power source is turned off, the motor stops instantaneously and holds the load. Since the electromagnetic brakes exert holding power even while the power is off, they are highly suitable for use as emergency brakes.

The holding brake force is, depending upon the size of the output, 30 mN·m~500 mN·m.

Safety Standards and CE Marking

Standards	Certification Body	Standards File No.	CE Marking
UL 1004 UL 2111	UL	E64199 (6 W Type)	Low Voltage Directives
CSA C22.2 No.100 CSA C22.2 No.77		E64197 (15 W~90 W Type)	
EN 60950-1 EN 60034-1 EN 60034-5 IEC 60664-1	Conform to EN/IEC Standards		
GB 12350	CQC	2003010401091525 (Single-Phase 6 W)	
		2003010401091527 (Three-Phase 6 W)	
		2003010401091522 (Single-Phase 15 W~90 W Type)	
		2003010401091520 (Three-Phase 25 W~90 W Type)	

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

System Configuration

Mounting Brackets (Accessories)
→ Page 121

Flexible Couplings (Accessories)
→ Page 123

Right-Angle Gearheads (Sold separately)
→ Page 108

Electromagnetic Brake Motor

Brake Pack SB50W (Sold separately)
Equipped with instantaneous stopping functions, thermal protector open detection functions.
→ Page 114

Programmable Controller

AC Power Supply

24 VDC Power Supply

Gearheads (Sold separately)

Capacitor (Included)

Capacitor Cap* (Included)
Insulating cap for capacitor terminal section.

● **Example of System Configuration (Body)**

⊙: Required under this system.
○: Selectable according to necessity. Oriental Motor provides.

Motor (Pinion Shaft) 4RK25GN-CW2ME	+	Long Life/Low Noise GN-S Gearhead 4GN25S	Mounting Bracket SOL4M5	Flexible Coupling MCL401012	Brake Pack SB50W
		⊙	○	○	○

*Capacitor cap is included.

● The system configuration shown above is an example. Other configurations are available.

Product Number Code

● Motor

5 R K 40 GN - CW 2 M E

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Motor Frame Size	2: 60 mm 3: 70 mm 4: 80 mm 5: 90 mm
② Motor Type	I: Induction Motor R: Reversible Motor
③ Series	K: K Series
④ Output Power (W)	(Example) 40: 40 W
⑤ Motor Shaft Type	GN: GN Type Pinion Shaft GE: GE Type Pinion Shaft A: Round Shaft
⑥ Power Supply Voltage	AW: Single-Phase 100 VAC, 110/115 VAC CW: Single-Phase 200 VAC, 220/230 VAC SW: Three-Phase 200/220/230 VAC
⑦	2, 3: RoHS-Compliant
⑧	M: Power Off Activated Electromagnetic Brake
⑨ Included Capacitor*	J: For Single-Phase 100 VAC, 200 VAC U: For Single-Phase 110/115 VAC E: For Single-Phase 220/230 VAC Blank: Three-Phase Type

* For some products, type of capacitor varies. Refer to the pages where each product is listed.

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.

When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

(Example) Model: **5RK40GN-CW2ME** → Motor nameplate and product approved under various safety standards: **5RK40GN-CW2M**

● Gearhead

5 GN 50 S

① ② ③ ④

① Gearhead Frame Size	2: 60 mm 3: 70 mm 4: 80 mm 5: 90 mm
② Type of Pinion	GN: GN Type Pinion GE: GE Type Pinion
③ Gear Ratio	(Example) 50: Gear Ratio of 1:50 10X denotes the decimal gear ratio of gear ratio 1:10
④	S: Long Life/Low Noise GN-S Gearhead, RoHS-Compliant RH: Right-Angle/Hollow Shaft Gearhead, RoHS-Compliant RA: Right-Angle/Solid Shaft Gearhead, RoHS-Compliant

General Specifications of Motors

Item	Specifications
Insulation Resistance	100 M Ω or more when 500 VDC megger is applied between the windings and the frame after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 1.5 kV at 50 Hz or 60 Hz applied between the windings and the frame for 1 minute after rated motor operation under normal ambient temperature and humidity.
Temperature Rise	Temperature rise of windings are 80°C or less measured by the resistance change method after rated motor operation under normal ambient temperature and humidity, with connecting a gearhead or equivalent heat radiation plate*. (Three-phase type: 70°C or less)
Insulation Class	Class B (130°C)
Overheat Protection	6 W type has impedance protection. All others have built-in thermal protector (automatic return type) Operating temperature; open: 130°C \pm 5°C, close: 82°C \pm 15°C
Ambient Temperature	Single-phase 100 VAC, Single-phase 200 VAC, Three-phase 200 VAC: -10°C~+50°C (nonfreezing) Other voltage: -10°C~+40°C (nonfreezing)
Ambient Humidity	85% or less (noncondensing)
Degree of Protection	6 W, 15 W, 25 W, 40 W Type: IP20 60 W, 90 W Type: IP40

* Heat radiation plate (Material: Aluminum)

Motor Type	Size (mm)	Thickness (mm)
6 W Type	115 \times 115	5
15 W Type	125 \times 125	
25 W Type	135 \times 135	
40 W Type	165 \times 165	
60 W, 90 W Type	200 \times 200	

Power Off Activated Type Electromagnetic Brake Motors

6 W

Frame Size: □60 mm



(Gearhead sold separately)

Specifications

● Motor (RoHS)

This type of motor does not contain a built-in simple brake mechanism.



Model		Rating	Output Power W	Voltage VAC	Frequency Hz	Current A	Starting Torque mN·m	Rated Torque mN·m	Rated Speed r/min	Capacitor μF
Pinion Shaft Type	Round Shaft Type									
ZP 2RK6GN-AW2MJ	2RK6A-AW2MJ	30 minutes	6	Single-Phase 100	50	0.244	50	49	1150	4.5
					60	0.295	45	41	1400	
ZP 2RK6GN-AW2MU	2RK6A-AW2MU	30 minutes	6	Single-Phase 110 Single-Phase 115	60	0.235	45	41	1450	3.5
						0.242				
ZP 2RK6GN-CW2MJ	2RK6A-CW2MJ	30 minutes	6	Single-Phase 200	50	0.113	50	49	1150	1.0
					60	0.131	45	41	1400	
ZP 2RK6GN-CW2ME	2RK6A-CW2ME	30 minutes	6	Single-Phase 220 Single-Phase 230	50	0.107	50	49	1150	0.8
					60	0.109	45	41	1450	
					50	0.112	50	49	1200	
					60	0.113	45	41	1450	
ZP 2IK6GN-SW2M	2IK6A-SW2M	Continuous	6	Three-Phase 200 Three-Phase 220 Three-Phase 230	50	0.081	49	49	1200	-
					60	0.072	41	41	1400	
					60	0.076	41	41	1500	
					60	0.079				

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.
When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

ZP: Impedance protected

● Electromagnetic Brake (Power Off Activated Type)

Motor Model	Voltage VAC	Frequency Hz	Current A	Input W	Holding Brake Torque mN·m
2RK6GN-AW2MJ 2RK6A-AW2MJ	Single-Phase 100	50	0.03	3	30
		60			
2RK6GN-AW2MU 2RK6A-AW2MU	Single-Phase 110 Single-Phase 115	60	0.03	3	30
2RK6GN-CW2MJ 2RK6A-CW2MJ	Single-Phase 200	50	0.02	3	30
		60			
2RK6GN-CW2ME 2RK6A-CW2ME	Single-Phase 220 Single-Phase 230	50	0.02	3	30
		60			
		50			
		60			
2IK6GN-SW2M 2IK6A-SW2M	Single-Phase 200 Single-Phase 220 Single-Phase 230	50	0.02	3	30
		60			
		60			

Product Line

● Motor (RoHS)

Model	
Pinion Shaft Type	Round Shaft Type
2RK6GN-AW2MJ	2RK6A-AW2MJ
2RK6GN-AW2MU	2RK6A-AW2MU
2RK6GN-CW2MJ	2RK6A-CW2MJ
2RK6GN-CW2ME	2RK6A-CW2ME
2IK6GN-SW2M	2IK6A-SW2M

● Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	2GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	2GN10XS (Decimal gearhead)	

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the gear ratio in the box (□) within the model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 3 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
2RK6GN-AW2MJ 2RK6GN-CW2MJ 2RK6GN-CW2ME 2IK6GN-SW2M	2GN□S	0.12	0.14	0.20	0.24	0.30	0.36	0.50	0.60	0.71	0.89	1.1	1.3	1.6	1.9	2.4	2.9	3	3	3	3

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
2RK6GN-AW2MJ 2RK6GN-AW2MU 2RK6GN-CW2MJ 2RK6GN-CW2ME 2IK6GN-SW2M	2GN□S	0.10	0.12	0.17	0.20	0.25	0.30	0.42	0.50	0.60	0.75	0.90	1.1	1.4	1.6	2.0	2.4	2.7	3	3	3

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107


Gearhead → Page 107

Permissible Load Inertia J for Gearhead


→ Page 107

Starting and Braking Characteristics (Reference Values)

● Single-Phase Motor

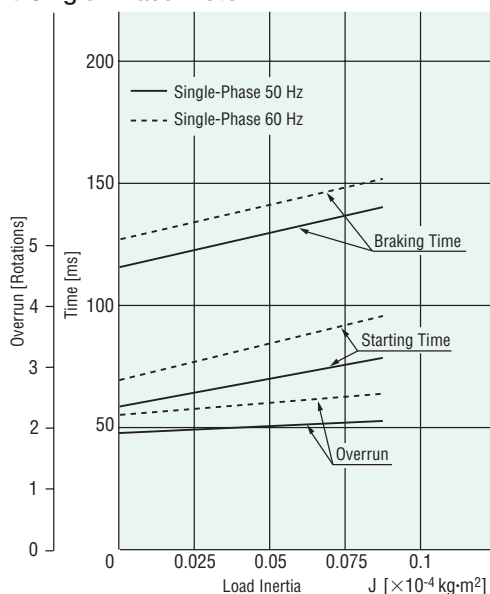

● Three-Phase Motor

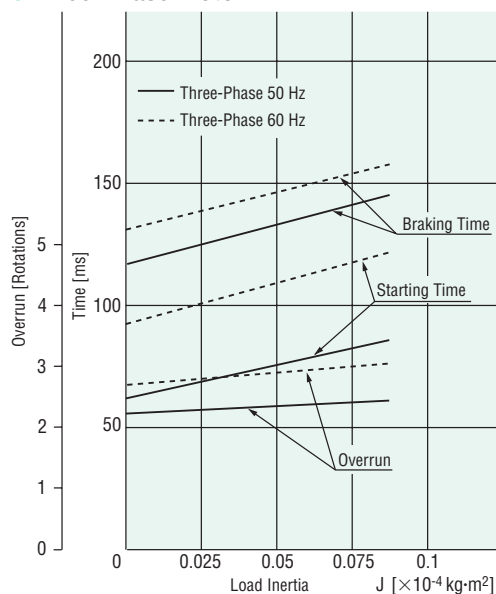

Dimensions (Unit = mm)




Mounting screws are included with gearheads.

Motor/Gearhead

Mass: Motor 0.9 kg
Gearhead 0.4 kg

Motor Model	Gearhead Model	Gear Ratio	L1
2RK6GN-AW2M <input type="checkbox"/>	2GN <input type="checkbox"/> S	3~18	30
2RK6GN-CW2M <input type="checkbox"/>		25~180	40
2IK6GN-SW2M			


Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box () within the model name.
Enter the gear ratio in the box () within the model name.

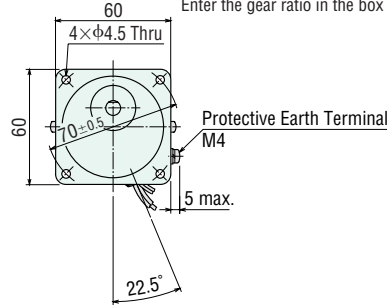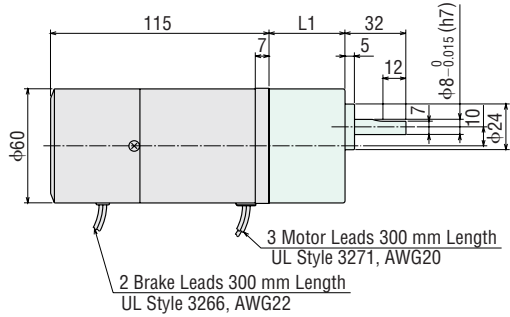

Detail Drawing of Protective Earth Terminal

Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

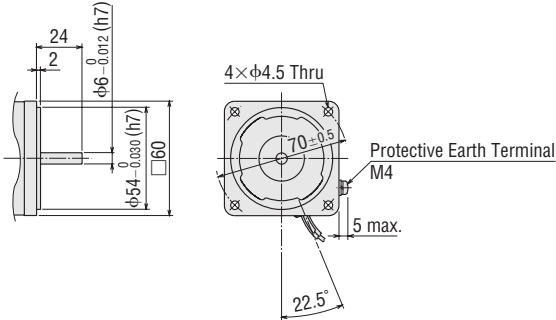


Decimal Gearhead

Can be connected to **GN** pinion shaft type.


2GN10XS

Mass: 0.2 kg

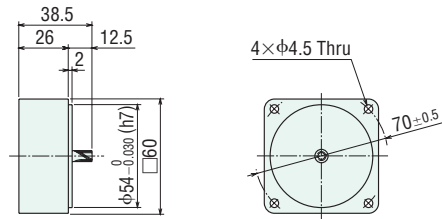

Capacitor

(Included with single-phase motors)





Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Pinion Shaft Type	Round Shaft Type						
2RK6GN-AW2MJ	2RK6A-AW2MJ	CH45FAUL2	37	18	27	30	Included
2RK6GN-AW2MU	2RK6A-AW2MU	CH35FAUL2	31	17	27	25	
2RK6GN-CW2MJ	2RK6A-CW2MJ	CH10BFAUL	37	18	27	30	
2RK6GN-CW2ME	2RK6A-CW2ME	CH08BFAUL	31	17	27	20	

Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

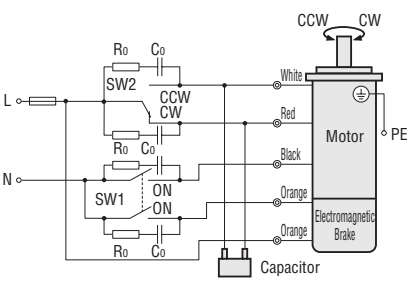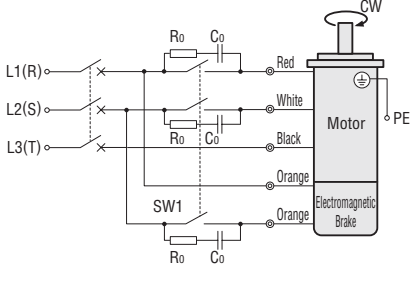Single-Phase Motor	<p>2RK6GN-AW2M □</p> <p>2RK6GN-CW2M □</p>	 <p>SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.</p> <p>If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).</p> <p>Direction of Rotation To rotate the motor in a clockwise (CW) direction, turn SW2 to CW. To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.</p> <table border="1" data-bbox="845 593 1460 739"> <thead> <tr> <th rowspan="2">Switch No.</th> <th colspan="2">Specifications</th> <th rowspan="2">Note</th> </tr> <tr> <th>Single-Phase 100 VAC, 110/115 VAC Input</th> <th>Single-Phase 200 VAC, 220/230 VAC Input</th> </tr> </thead> <tbody> <tr> <td>SW1</td> <td>125 VAC 3 A minimum (Inductive Load)</td> <td>250 VAC 1.5 A minimum (Inductive Load)</td> <td>Switched Simultaneously</td> </tr> <tr> <td>SW2</td> <td></td> <td></td> <td>—</td> </tr> </tbody> </table>	Switch No.	Specifications		Note	Single-Phase 100 VAC, 110/115 VAC Input	Single-Phase 200 VAC, 220/230 VAC Input	SW1	125 VAC 3 A minimum (Inductive Load)	250 VAC 1.5 A minimum (Inductive Load)	Switched Simultaneously	SW2			—
Switch No.	Specifications			Note												
	Single-Phase 100 VAC, 110/115 VAC Input	Single-Phase 200 VAC, 220/230 VAC Input														
SW1	125 VAC 3 A minimum (Inductive Load)	250 VAC 1.5 A minimum (Inductive Load)	Switched Simultaneously													
SW2			—													
Three-Phase Motor	<p>2IK6GN-SW2M</p>	 <p>SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.</p> <p>If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).</p> <p>Direction of Rotation To change the rotation direction, change any two connections between R, S and T.</p> <table border="1" data-bbox="845 1052 1460 1164"> <thead> <tr> <th>Switch No.</th> <th>Specifications</th> <th>Note</th> </tr> </thead> <tbody> <tr> <td>SW1</td> <td>250 VAC 1.5 A minimum (Inductive Load)</td> <td>Switched Simultaneously</td> </tr> </tbody> </table>	Switch No.	Specifications	Note	SW1	250 VAC 1.5 A minimum (Inductive Load)	Switched Simultaneously								
Switch No.	Specifications	Note														
SW1	250 VAC 1.5 A minimum (Inductive Load)	Switched Simultaneously														

PE: Protective Earth

● R₀ and C₀ indicate surge suppressor circuit. [R₀=5~200 Ω, C₀=0.1~0.2 μF, 200 WV (400 WV)]

EPCR1201-2 is available as an optional surge suppressor. → Page 123

RoHS

Power Off Activated Type Electromagnetic Brake Motors

15 W

Frame Size: □70 mm



(Gearhead sold separately)

Specifications

● Motor (RoHS)

This type of motor does not contain a built-in simple brake mechanism.



Model		Rating	Output Power W	Voltage VAC	Frequency Hz	Current A	Starting Torque mN·m	Rated Torque mN·m	Rated Speed r/min	Capacitor μF
Pinion Shaft Type	Round Shaft Type									
ⓉP	3RK15GN-AW2MJ	30 minutes	15	Single-Phase 100	50	0.40	100	125	1200	7.5
					60	0.50		105	1450	
ⓉP	3RK15GN-AW2MU	30 minutes	15	Single-Phase 110 Single-Phase 115	60	0.42	100	105	1450	6.0
						0.41				
ⓉP	3RK15GN-CW2MJ	30 minutes	15	Single-Phase 200	50	0.19	100	125	1200	1.8
					60	0.24		105	1450	
ⓉP	3RK15GN-CW2ME	30 minutes	15	Single-Phase 220	50	0.18	100	125	1200	1.5
					60	0.20		105	1450	
				Single-Phase 230	50	0.19	100	125	1200	
					60	0.20		105	1450	

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.

When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

ⓉP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

(The power supply to the electromagnetic brake is kept and the brake is released.)

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

● Electromagnetic Brake (Power Off Activated Type)

Motor Model	Voltage VAC	Frequency Hz	Current A	Input W	Holding Brake Torque mN·m
3RK15GN-AW2MJ 3RK15A-AW2MJ	Single-Phase 100	50	0.09	7	80
		60			
3RK15GN-AW2MU 3RK15A-AW2MU	Single-Phase 110 Single-Phase 115	60	0.09	7	80
3RK15GN-CW2MJ 3RK15A-CW2MJ	Single-Phase 200	50	0.05	7	80
		60			
3RK15GN-CW2ME 3RK15A-CW2ME	Single-Phase 220	50	0.05	7	80
		60			
	Single-Phase 230	50			
		60			

Product Line

● Motor (RoHS)

Type	Model	
	Pinion Shaft Type	Round Shaft Type
Lead Wire	3RK15GN-AW2MJ	3RK15A-AW2MJ
	3RK15GN-AW2MU	3RK15A-AW2MU
	3RK15GN-CW2MJ	3RK15A-CW2MJ
	3RK15GN-CW2ME	3RK15A-CW2ME

● Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	3GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	3GN10XS (Decimal gearhead)	

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the gear ratio in the box (□) within the model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 5 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
3RK15GN-AW2MJ 3RK15GN-CW2MJ 3RK15GN-CW2ME	3GN□S	0.30	0.36	0.51	0.61	0.76	0.91	1.3	1.5	1.8	2.3	2.7	3.3	4.1	5	5	5	5	5	5	5

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
3RK15GN-AW2MJ 3RK15GN-AW2MU 3RK15GN-CW2MJ 3RK15GN-CW2ME	3GN□S	0.26	0.31	0.43	0.51	0.64	0.77	1.1	1.3	1.5	1.9	2.3	2.8	3.5	4.2	5	5	5	5	5	5

Permissible Overhung Load and Permissible Thrust Load


Motor (Round shaft type) → Page 107

Gearhead → Page 107

Permissible Load Inertia J for Gearhead

→ Page 107

Starting and Braking Characteristics (Reference Values)



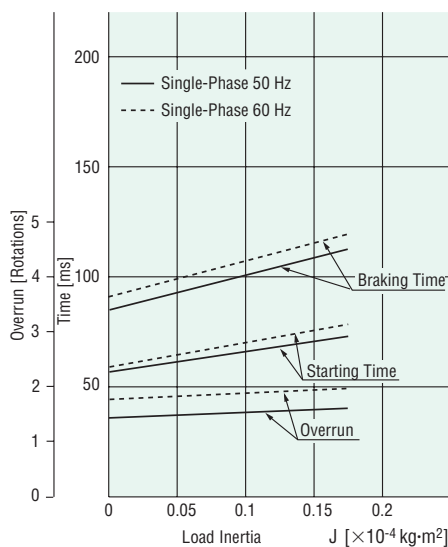


Dimensions (Unit = mm)

Mounting screws are included with gearheads.


Motor/Gearhead

Mass: Motor 1.3 kg
Gearhead 0.55 kg

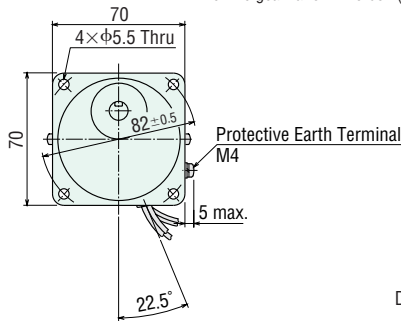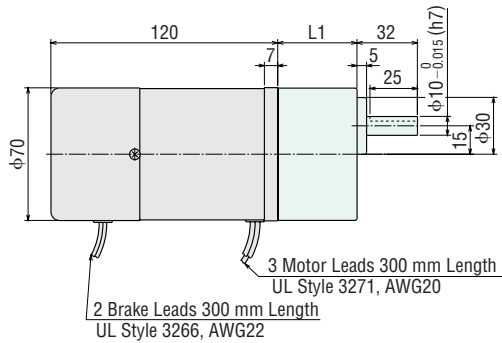


Key and Key Slot

(The key is included with the gearhead)



Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

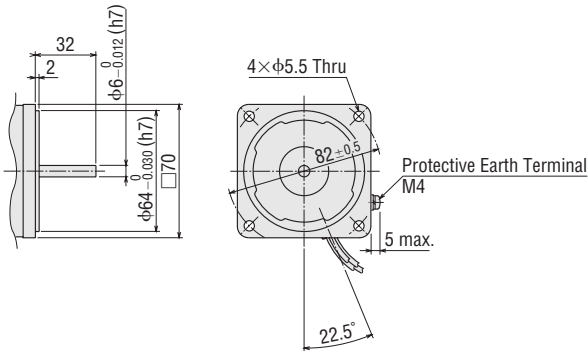


Motor Model	Gearhead Model	Gear Ratio	L1
3RK15GN-AW2M <input type="checkbox"/>	3GN <input type="checkbox"/>	3~18	32
3RK15GN-CW2M <input type="checkbox"/>		25~180	42

Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box () within the model name.
Enter the gear ratio in the box () within the model name.

Decimal Gearhead


Can be connected to **GN** pinion shaft type.

3GN10XS
Mass: 0.3 kg

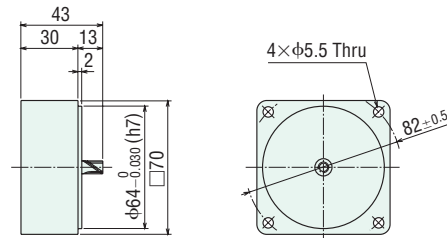

Capacitor

(Included with the motors)



Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Pinion Shaft Type	Round Shaft Type						
3RK15GN-AW2MJ	3RK15A-AW2MJ	CH75CFAUL2	48	21	31	45	Included
3RK15GN-AW2MU	3RK15A-AW2MU	CH60CFAUL2	38	21	31	40	
3RK15GN-CW2MJ	3RK15A-CW2MJ	CH18BFAUL	38	21	31	35	
3RK15GN-CW2ME	3RK15A-CW2ME	CH15BFAUL	38	21	31	35	

Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

3RK15GN-AW2M □

3RK15GN-CW2M □

SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.

If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).

Direction of Rotation
To rotate the motor in a clockwise (CW) direction, turn SW2 to CW.
To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.

Switch No.	Specifications		Note
	Single-Phase 100 VAC, 110/115 VAC Input	Single-Phase 200 VAC, 220/230 VAC Input	
SW1	125 VAC 3 A minimum (Inductive Load)	250 VAC 1.5 A minimum (Inductive Load)	Switched Simultaneously
SW2			—

PE: Protective Earth

- R_0 and C_0 indicate surge suppressor circuit. [$R_0=5\sim 200\ \Omega$, $C_0=0.1\sim 0.2\ \mu\text{F}$, 200 WV (400 WV)]

EPCR1201-2 is available as an optional surge suppressor. → Page 123

RoHS

Power Off Activated Type Electromagnetic Brake Motors

25 W

Frame Size: □80 mm



(Gearhead sold separately)

Right-angle gearheads (hollow shaft or solid shaft) can be combined.

Right-Angle Gearheads → Page 108



Specifications

● Motor (RoHS)

This type of motor does not contain a built-in simple brake mechanism.



Model		Rating	Output Power W	Voltage VAC	Frequency Hz	Current A	Starting Torque mN·m	Rated Torque mN·m	Rated Speed r/min	Capacitor μF	
Pinion Shaft Type	Round Shaft Type										
TP	4RK25GN-AW2MJ	30 minutes	25	Single-Phase 100	50	0.55	160	205	1200	10	
					60	0.64	140	170	1450		
TP	4RK25GN-AW2MU	30 minutes	25	Single-Phase 110	60	0.54	140	170	1450	8.0	
											Single-Phase 115
TP	4RK25GN-CW2MJ	30 minutes	25	Single-Phase 200	50	0.27	160	205	1200	2.5	
					60	0.34	140	170	1450		
					Single-Phase 220	50	0.27	160	205		1200
					60	0.28	140	170	1450		
TP	4RK25GN-CW2ME	30 minutes	25	Single-Phase 220	50	0.27	160	205	1200	2.0	
					60	0.28	140	170	1450		
					Single-Phase 230	50	0.25	160	205		1200
					60	0.28	140	170	1450		
TP	4IK25GN-SW2M	Continuous	25	Three-Phase 200	50	0.23	240	190	1300	-	
					60	0.21	160	160	1550		
					Three-Phase 220	60	0.20	160	150		1600
						Three-Phase 230	60	0.21	160		150

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.

When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

● **TP**: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

(The power supply to the electromagnetic brake is kept and the brake is released.)

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

● Electromagnetic Brake (Power Off Activated Type)

Motor Model	Voltage VAC	Frequency Hz	Current A	Input W	Holding Brake Torque mN·m
4RK25GN-AW2MJ 4RK25A-AW2MJ	Single-Phase 100	50	0.09	6	100
		60			
4RK25GN-AW2MU 4RK25A-AW2MU	Single-Phase 110 Single-Phase 115	60	0.09	6	100
4RK25GN-CW2MJ 4RK25A-CW2MJ	Single-Phase 200 Single-Phase 220	50	0.05	7	100
		60			
		50			
		60			
4RK25GN-CW2ME 4RK25A-CW2ME	Single-Phase 220 Single-Phase 230	60	0.05	7	100
		50			
		60			
		60			
4IK25GN-SW2M 4IK25A-SW2M	Single-Phase 200 Single-Phase 220 Single-Phase 230	50	0.05	7	100
		60			
		60			

Product Line

● Motor (RoHS)

Model	
Pinion Shaft Type	Round Shaft Type
4RK25GN-AW2MJ	4RK25A-AW2MJ
4RK25GN-AW2MU	4RK25A-AW2MU
4RK25GN-CW2MJ	4RK25A-CW2MJ
4RK25GN-CW2ME	4RK25A-CW2ME
4IK25GN-SW2M	4IK25A-SW2M

● Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	4GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	4GN10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	4GN□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	4GN□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the gear ratio in the box (□) within the model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio.
The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor.
In that case, the permissible torque is 8 N·m. When a gearhead of 1/25~1/36 is connected, the value for permissible torque is 6 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
4RK25GN-AW2MJ 4RK25GN-CW2MJ 4RK25GN-CW2ME / 4GN□S		0.50	0.60	0.83	1.0	1.2	1.5	2.1	2.5	3.0	3.7	4.5	5.4	6.8	8	8	8	8	8	8	8
4IK25GN-SW2M / 4GN□S		0.46	0.55	0.77	0.92	1.2	1.4	1.9	2.3	2.8	3.5	4.2	5.0	6.3	7.5	8	8	8	8	8	8

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
4RK25GN-AW2MJ 4RK25GN-AW2MU 4RK25GN-CW2MJ 4RK25GN-CW2ME / 4GN□S		0.41	0.50	0.69	0.83	1.0	1.2	1.7	2.1	2.5	3.1	3.7	4.5	5.6	6.7	8	8	8	8	8	8
4IK25GN-SW2M (200 VAC) / 4GN□S		0.39	0.47	0.65	0.78	0.97	1.2	1.6	1.9	2.3	2.9	3.5	4.2	5.3	6.3	7.9	8	8	8	8	8
4IK25GN-SW2M (220/230 VAC) / 4GN□S		0.36	0.44	0.61	0.73	0.91	1.1	1.5	1.8	2.2	2.7	3.3	3.9	5.0	5.9	7.4	8	8	8	8	8

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107


Gearhead → Page 107

Permissible Load Inertia J for Gearhead


→ Page 107

Starting and Braking Characteristics (Reference Values)

● Single-Phase Motor

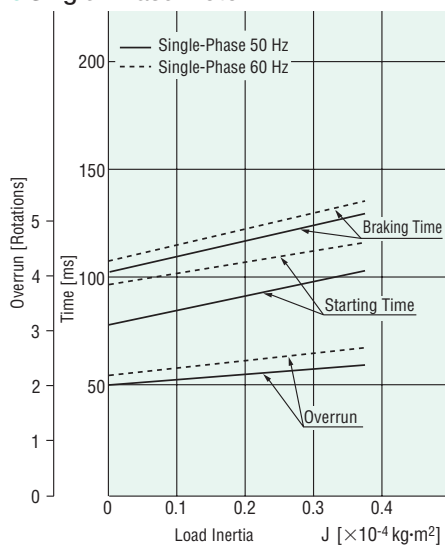

● Three-Phase Motor

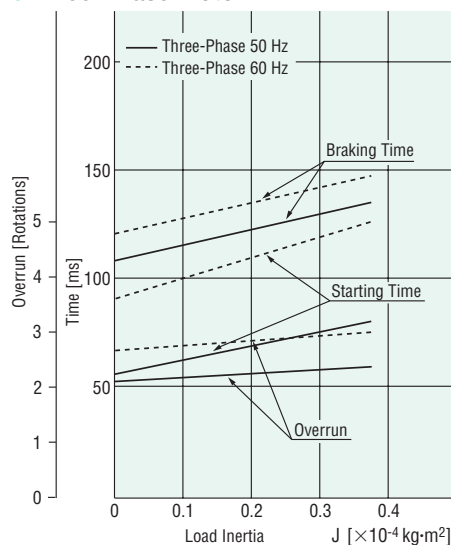

Dimensions (Unit = mm)

Mounting screws are included with gearheads.




Motor/Gearhead

Mass: Motor 2.0 kg
Gearhead 0.65 kg

Motor Model	Gearhead Model	Gear Ratio	L1
4RK25GN-AW2M <input type="checkbox"/>	4GN <input type="checkbox"/> S	3~18	32
4RK25GN-CW2M <input type="checkbox"/>		25~180	42.5
4IK25GN-SW2M			


Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box () within the model name.

Enter the gear ratio in the box () within the model name.

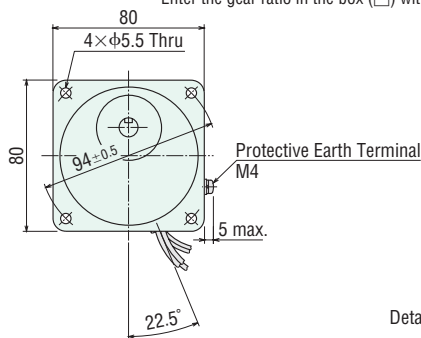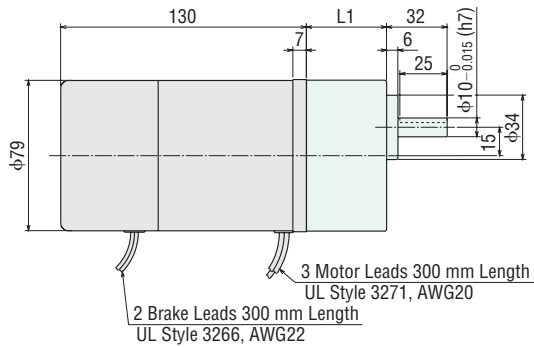


Key and Key Slot

(The key is included with the gearhead)



Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

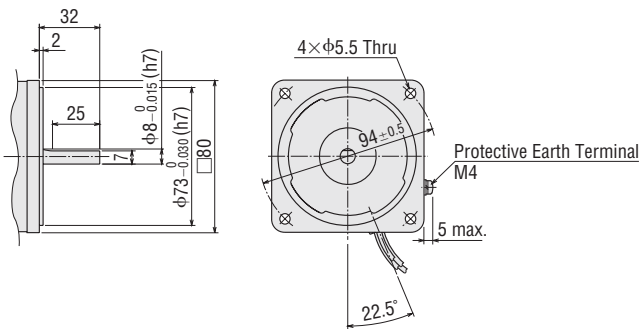


Decimal Gearhead

Can be connected to **GN** pinion shaft type.


4GN10XS

Mass: 0.4 kg

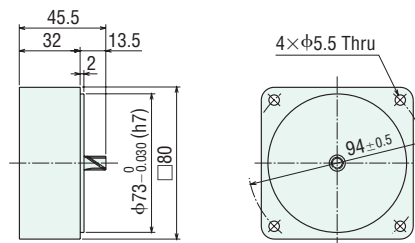

Capacitor

(Included with single-phase motors)





Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Pinion Shaft Type	Round Shaft Type						
4RK25GN-AW2MJ	4RK25A-AW2MJ	CH100CFAUL2	58	21	31	50	Included
4RK25GN-AW2MU	4RK25A-AW2MU	CH80CFAUL2	48	21	31	45	
4RK25GN-CW2MJ	4RK25A-CW2MJ	CH25BFAUL	48	21	31	45	
4RK25GN-CW2ME	4RK25A-CW2ME	CH20BFAUL	48	19	29	35	

Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

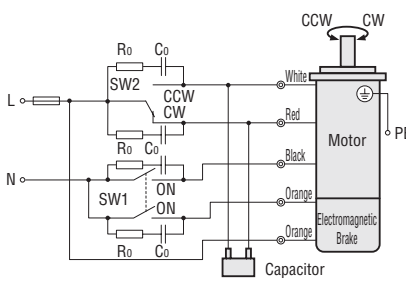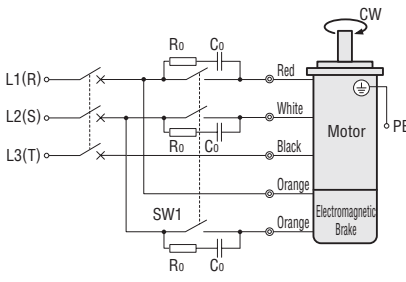Single-Phase Motor 4RK25GN-AW2M □ 4RK25GN-CW2M □	 <p>The diagram shows a single-phase AC circuit with Line (L) and Neutral (N) inputs. Two switches, SW1 and SW2, control the motor and brake. SW1 is a double-throw switch that controls both the motor and the electromagnetic brake. SW2 is a selector switch for rotation direction, with positions for CCW and CW. The motor windings are connected to White, Red, and Black wires. The electromagnetic brake is connected to two Orange wires. A surge suppressor circuit (R₀ and C₀) is connected across the line and neutral. A PE (Protective Earth) terminal is also shown.</p>	<p>SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.</p> <p>If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).</p> <p>Direction of Rotation To rotate the motor in a clockwise (CW) direction, turn SW2 to CW. To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.</p> <table border="1" data-bbox="842 582 1460 728"> <thead> <tr> <th rowspan="2">Switch No.</th> <th colspan="2">Specifications</th> <th rowspan="2">Note</th> </tr> <tr> <th>Single-Phase 100 VAC, 110/115 VAC Input</th> <th>Single-Phase 200 VAC, 220/230 VAC Input</th> </tr> </thead> <tbody> <tr> <td>SW1</td> <td>125 VAC 3 A minimum (Inductive Load)</td> <td>250 VAC 1.5 A minimum (Inductive Load)</td> <td>Switched Simultaneously</td> </tr> <tr> <td>SW2</td> <td></td> <td></td> <td>—</td> </tr> </tbody> </table>	Switch No.	Specifications		Note	Single-Phase 100 VAC, 110/115 VAC Input	Single-Phase 200 VAC, 220/230 VAC Input	SW1	125 VAC 3 A minimum (Inductive Load)	250 VAC 1.5 A minimum (Inductive Load)	Switched Simultaneously	SW2			—
Switch No.	Specifications			Note												
	Single-Phase 100 VAC, 110/115 VAC Input	Single-Phase 200 VAC, 220/230 VAC Input														
SW1	125 VAC 3 A minimum (Inductive Load)	250 VAC 1.5 A minimum (Inductive Load)	Switched Simultaneously													
SW2			—													
Three-Phase Motor 4IK25GN-SW2M	 <p>The diagram shows a three-phase AC circuit with Line 1 (L1/R), Line 2 (L2/S), and Line 3 (L3/T) inputs. A single switch SW1 controls both the motor and the electromagnetic brake. The motor windings are connected to Red, White, and Black wires. The electromagnetic brake is connected to two Orange wires. A surge suppressor circuit (R₀ and C₀) is connected across the line and neutral. A PE (Protective Earth) terminal is also shown.</p>	<p>SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.</p> <p>If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).</p> <p>Direction of Rotation To change the rotation direction, change any two connections between R, S and T.</p> <table border="1" data-bbox="842 1052 1460 1176"> <thead> <tr> <th>Switch No.</th> <th>Specifications</th> <th>Note</th> </tr> </thead> <tbody> <tr> <td>SW1</td> <td>250 VAC 1.5 A minimum (Inductive Load)</td> <td>Switched Simultaneously</td> </tr> </tbody> </table>	Switch No.	Specifications	Note	SW1	250 VAC 1.5 A minimum (Inductive Load)	Switched Simultaneously								
Switch No.	Specifications	Note														
SW1	250 VAC 1.5 A minimum (Inductive Load)	Switched Simultaneously														

PE: Protective Earth

- R₀ and C₀ indicate surge suppressor circuit. [R₀=5~200 Ω, C₀=0.1~0.2 μF, 200 WV (400 WV)]

EPCR1201-2 is available as an optional surge suppressor. → Page 123

RoHS


Power Off Activated Type Electromagnetic Brake Motors

40 W

Frame Size: □90 mm



Right-angle gearheads (hollow shaft or solid shaft) can be combined.
Right-Angle Gearheads → Page 108



Specifications

● Motor (RoHS)

This type of motor does not contain a built-in simple brake mechanism.



Model		Rating	Output Power W	Voltage VAC	Frequency Hz	Current A	Starting Torque mN·m	Rated Torque mN·m	Rated Speed r/min	Capacitor μF
Pinion Shaft Type	Round Shaft Type									
TP	5RK40GN-AW2MJ	30 minutes	40	Single-Phase 100	50	0.85	300	315	1250	16
					60					
TP	5RK40GN-AW2MU	30 minutes	40	Single-Phase 110 Single-Phase 115	60	0.81	260	270	1450	12
TP	5RK40GN-CW2MJ	30 minutes	40	Single-Phase 200	50	0.40	270	315	1250	4.0
					60					
					50					
TP	5RK40GN-CW2ME	30 minutes	40	Single-Phase 220	60	0.43	260	260	1500	3.5
					50					
					60					
TP	5RK40GN-CW2ME	30 minutes	40	Single-Phase 230	50	0.38	270	315	1250	3.5
					60					
					60					
TP	5IK40GN-SW2M	Continuous	40	Three-Phase 200	50	0.32	400	300	1300	-
					60					
					60					
TP	5IK40GN-SW2M	Continuous	40	Three-Phase 220	60	0.30	260	260	1550	-
					60					
TP	5IK40GN-SW2M	Continuous	40	Three-Phase 230	60	0.31	260	260	1600	-
					60					

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops. (The power supply to the electromagnetic brake is kept and the brake is released.)

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

● Electromagnetic Brake (Power Off Activated Type)

Motor Model	Voltage VAC	Frequency Hz	Current A	Input W	Holding Brake Torque mN·m
5RK40GN-AW2MJ 5RK40A-AW2MJ	Single-Phase 100	50	0.09	6	200
		60			
5RK40GN-AW2MU 5RK40A-AW2MU	Single-Phase 110 Single-Phase 115	60	0.09	6	200
5RK40GN-CW2MJ 5RK40A-CW2MJ	Single-Phase 200	50	0.05	7	200
		60			
		50			
5RK40GN-CW2ME 5RK40A-CW2ME	Single-Phase 220	60	0.05	7	200
		50			
		60			
5IK40GN-SW2M 5IK40A-SW2M	Single-Phase 200	50	0.05	7	200
		60			
		60			

Product Line

● Motor (RoHS)

Model	
Pinion Shaft Type	Round Shaft Type
5RK40GN-AW2MJ	5RK40A-AW2MJ
5RK40GN-AW2MU	5RK40A-AW2MU
5RK40GN-CW2MJ	5RK40A-CW2MJ
5RK40GN-CW2ME	5RK40A-CW2ME
5IK40GN-SW2M	5IK40A-SW2M

● Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/Low Noise/ Parallel Shaft	5GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GN10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	5GN□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	5GN□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the gear ratio in the box (□) within the model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 10 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5RK40GN-AW2MJ 5RK40GN-CW2MJ 5RK40GN-CW2ME / 5GN□S		0.77	0.92	1.3	1.5	1.9	2.3	3.2	3.8	4.6	5.7	6.9	8.3	10	10	10	10	10	10	10	10
5IK40GN-SW2M / 5GN□S		0.73	0.87	1.2	1.5	1.8	2.2	3.0	3.6	4.4	5.5	6.6	7.9	9.9	10	10	10	10	10	10	10

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5RK40GN-AW2MJ 5RK40GN-AW2MU / 5GN□S		0.66	0.79	1.1	1.3	1.6	2.0	2.7	3.3	3.9	4.9	5.9	7.1	8.9	10	10	10	10	10	10	10
5RK40GN-CW2MJ 5RK40GN-CW2ME 5IK40GN-SW2M / 5GN□S		0.63	0.76	1.1	1.3	1.6	1.9	2.6	3.2	3.8	4.7	5.7	6.8	8.6	10	10	10	10	10	10	10

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107


Gearhead → Page 107

Permissible Load Inertia J for Gearhead


→ Page 107

Starting and Braking Characteristics (Reference Values)

● Single-Phase Motor

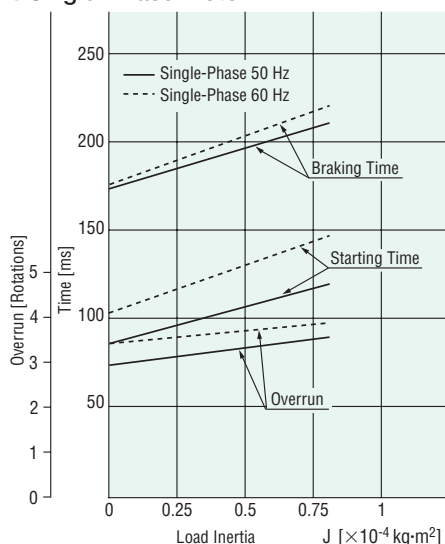

● Three-Phase Motor

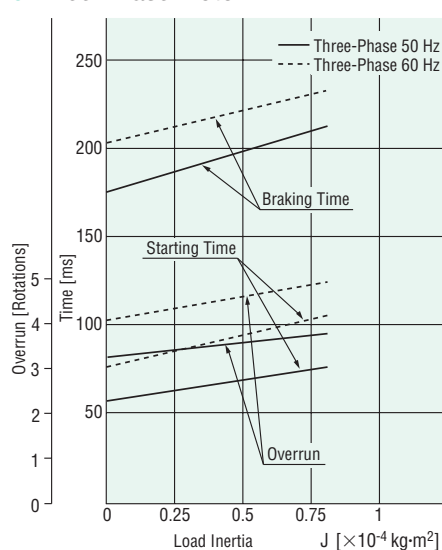

Dimensions (Unit = mm)



Mounting screws are included with gearheads.

Motor/Gearhead

Mass: Motor 2.8 kg
Gearhead 1.5 kg

Motor Model	Gearhead Model	Gear Ratio	L1
5RK40GN-AW2M	5GN □S	3~18	42
5RK40GN-CW2M		25~180	60
5IK40GN-SW2M			


● Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.
Enter the gear ratio in the box (□) within the model name.

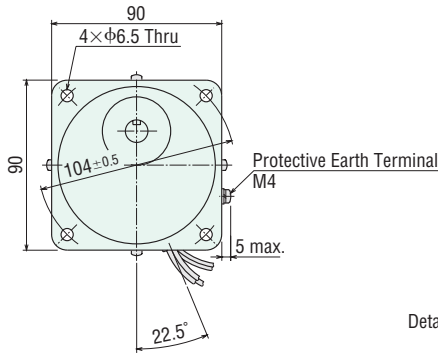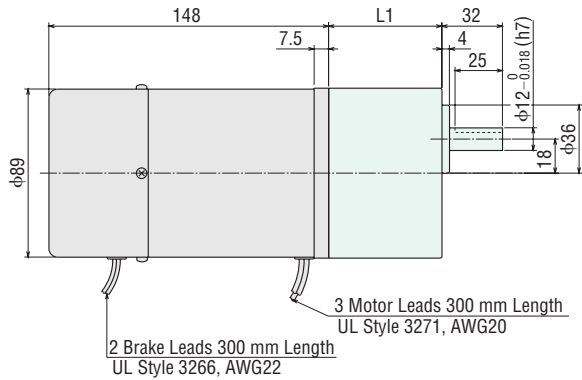

Detail Drawing of Protective Earth Terminal


Key and Key Slot

(The key is included with the gearhead)



Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

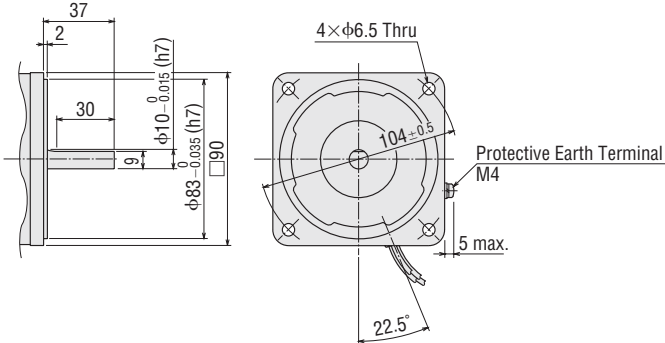


Decimal Gearhead

Can be connected to **GN** pinion shaft type.

5GN10XS


Mass: 0.6 kg

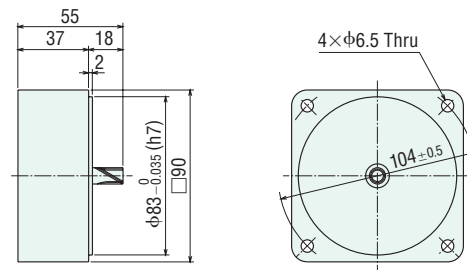

Capacitor (Included with single-phase motors)

Dimension No. ①

Dimension No. ②


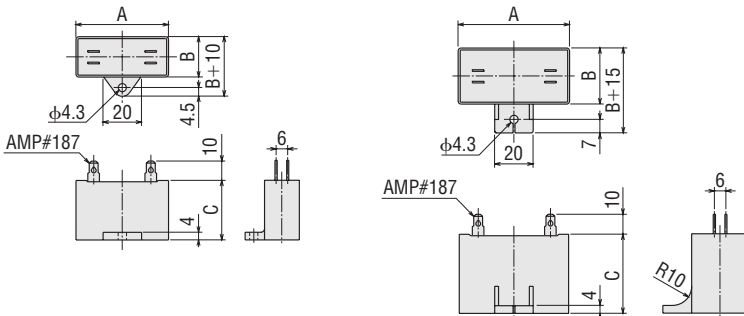


Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Dimension No.	Capacitor Cap
Pinion Shaft Type	Round Shaft Type							
5RK40GN-AW2MJ	5RK40A-AW2MJ	CH160CFAUL2	58	23.5	37	75	②	Included
5RK40GN-AW2MU	5RK40A-AW2MU	CH120CFAUL2	58	22	35	60	①	
5RK40GN-CW2MJ	5RK40A-CW2MJ	CH40BFAUL	58	23.5	37	70	②	
5RK40GN-CW2ME	5RK40A-CW2ME	CH35BFAUL	58	22	35	55	①	

Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

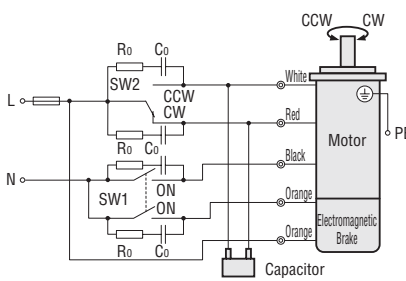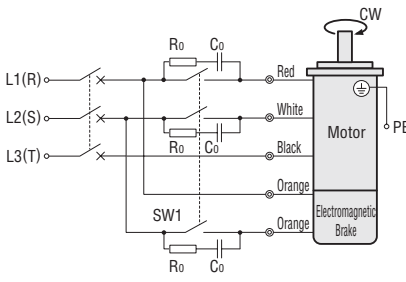Single-Phase Motor 5RK40GN-AW2M □ 5RK40GN-CW2M □	 <p>SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.</p> <p>If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).</p> <p>Direction of Rotation To rotate the motor in a clockwise (CW) direction, turn SW2 to CW. To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.</p> <table border="1" data-bbox="837 582 1460 739"> <thead> <tr> <th rowspan="2">Switch No.</th> <th colspan="2">Specifications</th> <th rowspan="2">Note</th> </tr> <tr> <th>Single-Phase 100 VAC, 110/115 VAC Input</th> <th>Single-Phase 200 VAC, 220/230 VAC Input</th> </tr> </thead> <tbody> <tr> <td>SW1</td> <td>125 VAC 5 A minimum (Inductive Load)</td> <td>250 VAC 5 A minimum (Inductive Load)</td> <td>Switched Simultaneously</td> </tr> <tr> <td>SW2</td> <td></td> <td></td> <td>—</td> </tr> </tbody> </table>	Switch No.	Specifications		Note	Single-Phase 100 VAC, 110/115 VAC Input	Single-Phase 200 VAC, 220/230 VAC Input	SW1	125 VAC 5 A minimum (Inductive Load)	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously	SW2			—
Switch No.	Specifications		Note												
	Single-Phase 100 VAC, 110/115 VAC Input	Single-Phase 200 VAC, 220/230 VAC Input													
SW1	125 VAC 5 A minimum (Inductive Load)	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously												
SW2			—												
Three-Phase Motor 5IK40GN-SW2M	 <p>SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.</p> <p>If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).</p> <p>Direction of Rotation To change the rotation direction, change any two connections between R, S and T.</p> <table border="1" data-bbox="837 1052 1460 1209"> <thead> <tr> <th>Switch No.</th> <th>Specifications</th> <th>Note</th> </tr> </thead> <tbody> <tr> <td>SW1</td> <td>250 VAC 5 A minimum (Inductive Load)</td> <td>Switched Simultaneously</td> </tr> </tbody> </table>	Switch No.	Specifications	Note	SW1	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously								
Switch No.	Specifications	Note													
SW1	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously													

PE: Protective Earth

- R_0 and C_0 indicate surge suppressor circuit. [$R_0=5\sim 200\ \Omega$, $C_0=0.1\sim 0.2\ \mu\text{F}$, 200 WV (400 WV)]

EPCR1201-2 is available as an optional surge suppressor. → Page 123

Power Off Activated Type Electromagnetic Brake Motors


60 W

Frame Size: □90 mm



Right-angle gearheads (hollow shaft or solid shaft) can be combined.

Right-Angle Gearheads → Page 108



Specifications

● Motor (RoHS)

This type of motor does not contain a built-in simple brake mechanism.



Model		Rating	Output Power W	Voltage VAC	Frequency Hz	Current A	Starting Torque mN·m	Rated Torque mN·m	Rated Speed r/min	Capacitor μF
Pinion Shaft Type	Round Shaft Type									
TP	5RK60GE-AW2MJ	30 minutes	60	Single-Phase 100	50	1.30	470	490	1200	25
					60	1.50	380	405	1450	
TP	5RK60GE-AW2MU	30 minutes	60	Single-Phase 110	60	1.24	380	405	1450	20
				Single-Phase 115						
TP	5RK60GE-CW2MJ	30 minutes	60	Single-Phase 200	50	0.61	450	490	1200	6.0
				Single-Phase 220	60	0.74	380	405	1450	
				Single-Phase 220	50	0.61	470	490	1200	
TP	5RK60GE-CW2ME	30 minutes	60	Single-Phase 220	60	0.61	380	405	1450	5.0
				Single-Phase 230	50	0.59	470	490	1200	
				Single-Phase 230	60	0.61	380	405	1450	
TP	5IK60GE-SW2M	Continuous	60	Three-Phase 200	50	0.50	600	450	1300	-
				Three-Phase 220	60	0.43	500	380	1550	
				Three-Phase 230	60	0.46	500	380	1600	

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.

When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

(The power supply to the electromagnetic brake is kept and the brake is released.)

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

● Electromagnetic Brake (Power Off Activated Type)

Motor Model	Voltage VAC	Frequency Hz	Current A	Input W	Holding Brake Torque mN·m
5RK60GE-AW2MJ 5RK60A-AW2MJ	Single-Phase 100	50	0.13	10	500
		60			
5RK60GE-AW2MU 5RK60A-AW2MU	Single-Phase 110 Single-Phase 115	60	0.13	10	500
5RK60GE-CW2MJ 5RK60A-CW2MJ	Single-Phase 200 Single-Phase 220	50	0.07	10	500
		60			
		50			
5RK60GE-CW2ME 5RK60A-CW2ME	Single-Phase 220 Single-Phase 230	60	0.07	10	500
		50			
		60			
5IK60GE-SW2M 5IK60A-SW2M	Single-Phase 200 Single-Phase 220 Single-Phase 230	50	0.07	10	500
		60			
		60			

Product Line

● Motor (RoHS)

Model	
Pinion Shaft Type	Round Shaft Type
5RK60GE-AW2MJ	5RK60A-AW2MJ
5RK60GE-AW2MU	5RK60A-AW2MU
5RK60GE-CW2MJ	5RK60A-CW2MJ
5RK60GE-CW2ME	5RK60A-CW2ME
5IK60GE-SW2M	5IK60A-SW2M

● Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/ Parallel Shaft	5GE□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GE10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	5GE□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	5GE□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the gear ratio in the box (□) within the model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio. The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 20 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5RK60GE-AW2MJ 5RK60GE-CW2MJ 5RK60GE-CW2ME / 5GE□S		1.2	1.4	2.0	2.4	3.0	3.6	4.5	5.4	6.4	8.1	9.7	11.6	16.2	19.4	20	20	20	20	20	20
5IK60GE-SW2M / 5GE□S		1.1	1.3	1.8	2.2	2.7	3.3	4.1	4.9	5.9	7.4	8.9	10.7	14.9	17.8	19.9	20	20	20	20	20

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180
5RK60GE-AW2MJ 5RK60GE-AW2MU 5RK60GE-CW2MJ 5RK60GE-CW2ME / 5GE□S		0.98	1.2	1.6	2.0	2.5	3.0	3.7	4.4	5.3	6.7	8.0	9.6	13.4	16.0	17.9	20	20	20	20	20
5IK60GE-SW2M / 5GE□S		0.92	1.1	1.5	1.8	2.3	2.8	3.5	4.2	5.0	6.3	7.5	9.0	12.5	15.0	16.8	20	20	20	20	20

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107


Gearhead → Page 107

Permissible Load Inertia J for Gearhead


→ Page 107

Starting and Braking Characteristics (Reference Values)

● Single-Phase Motor

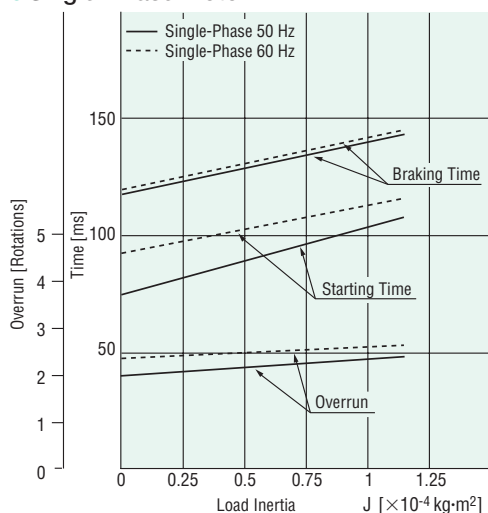

● Three-Phase Motor

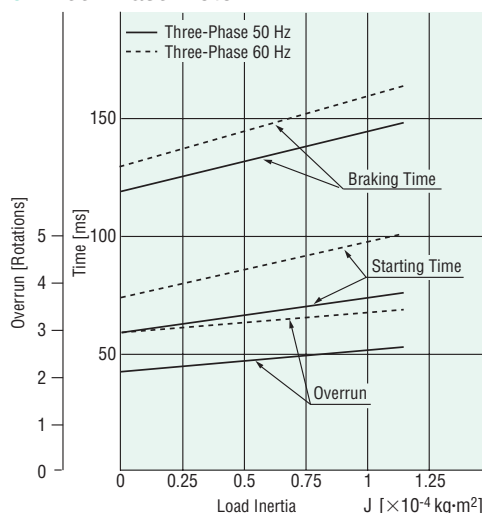


Dimensions (Unit = mm)

Mounting screws are included with gearheads.


Motor/Gearhead

Mass: Motor 3.4 kg

Gearhead 1.5 kg

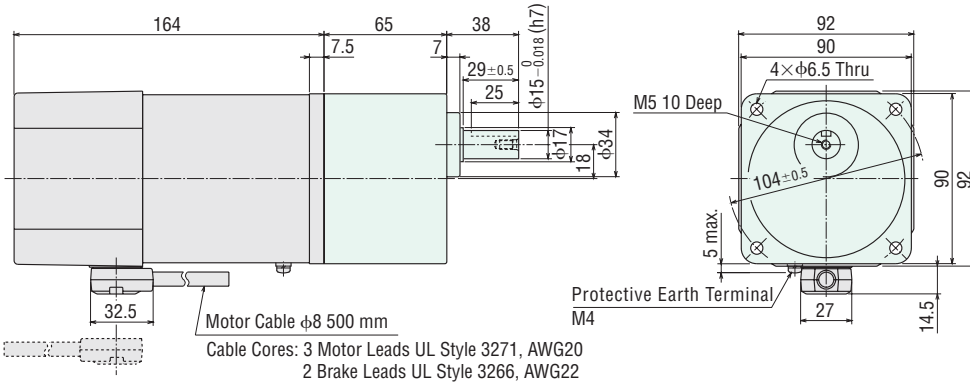


● Cable direction can be switched to the opposite direction.

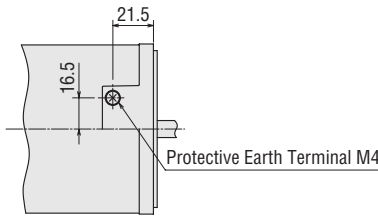


Detail Drawing of Protective Earth Terminal

Key and Key Slot (The key is included with the gearhead)



Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

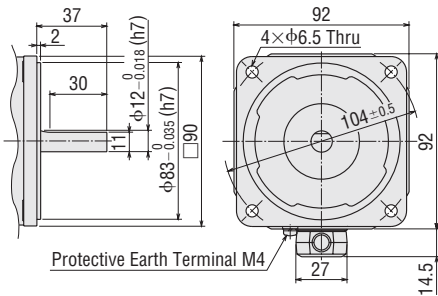


Decimal Gearhead


Can be connected to **GE** pinion shaft type.

5GE10XS

Mass: 0.6 kg

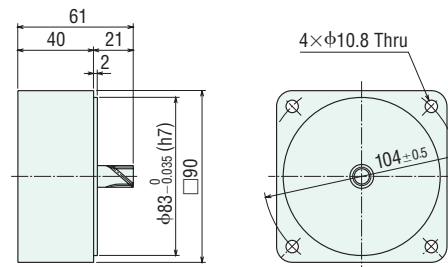

Capacitor (Included with single-phase motors)


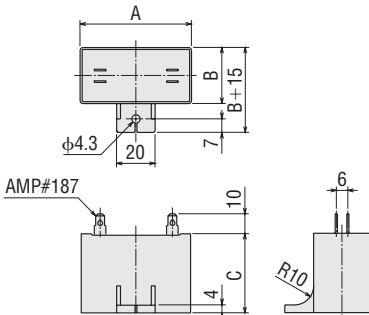


Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Pinion Shaft Type	Round Shaft Type						
5RK60GE-AW2MJ	5RK60A-AW2MJ	CH250CFAUL2	58	35	50	140	Included
5RK60GE-AW2MU	5RK60A-AW2MU	CH200CFAUL2	58	29	41	95	
5RK60GE-CW2MJ	5RK60A-CW2MJ	CH60BFAUL	58	29	41	85	
5RK60GE-CW2ME	5RK60A-CW2ME	CH50BFAUL	58	29	41	85	

Connection Diagrams

- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.
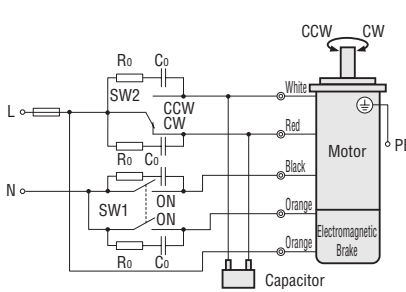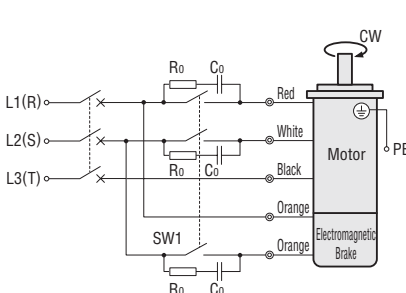
<p>Single-Phase Motor</p> <p>5RK60GE-AW2M □ 5RK60GE-CW2M □</p>	 <p>The diagram shows a single-phase AC input (L and N) connected to a motor with an electromagnetic brake. Two switches, SW1 and SW2, control the motor and brake. SW1 is a double-throw switch that controls both the motor and the brake. SW2 is a selector switch for rotation direction, with positions for CCW and CW. The motor has four leads: White, Red, Black, and Orange. The brake has two leads: Orange and Orange. A capacitor is connected to the motor leads. Protective Earth (PE) is connected to the motor frame.</p>	<p>SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.</p> <p>If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).</p> <p>Direction of Rotation To rotate the motor in a clockwise (CW) direction, turn SW2 to CW. To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.</p> <table border="1"> <thead> <tr> <th rowspan="2">Switch No.</th> <th colspan="2">Specifications</th> <th rowspan="2">Note</th> </tr> <tr> <th>Single-Phase 100 VAC, 110/115 VAC Input</th> <th>Single-Phase 200 VAC, 220/230 VAC Input</th> </tr> </thead> <tbody> <tr> <td>SW1</td> <td>125 VAC 5 A minimum (Inductive Load)</td> <td>250 VAC 5 A minimum (Inductive Load)</td> <td>Switched Simultaneously</td> </tr> <tr> <td>SW2</td> <td></td> <td></td> <td>—</td> </tr> </tbody> </table>	Switch No.	Specifications		Note	Single-Phase 100 VAC, 110/115 VAC Input	Single-Phase 200 VAC, 220/230 VAC Input	SW1	125 VAC 5 A minimum (Inductive Load)	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously	SW2			—
Switch No.	Specifications			Note												
	Single-Phase 100 VAC, 110/115 VAC Input	Single-Phase 200 VAC, 220/230 VAC Input														
SW1	125 VAC 5 A minimum (Inductive Load)	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously													
SW2			—													
<p>Three-Phase Motor</p> <p>5IK60GE-SW2M</p>	 <p>The diagram shows a three-phase AC input (L1(R), L2(S), L3(T)) connected to a motor with an electromagnetic brake. A single switch, SW1, controls both the motor and the brake. The motor has four leads: Red, White, Black, and Orange. The brake has two leads: Orange and Orange. A capacitor is connected to the motor leads. Protective Earth (PE) is connected to the motor frame.</p>	<p>SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.</p> <p>If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).</p> <p>Direction of Rotation To change the rotation direction, change any two connections between R, S and T.</p> <table border="1"> <thead> <tr> <th>Switch No.</th> <th>Specifications</th> <th>Note</th> </tr> </thead> <tbody> <tr> <td>SW1</td> <td>250 VAC 5 A minimum (Inductive Load)</td> <td>Switched Simultaneously</td> </tr> </tbody> </table>	Switch No.	Specifications	Note	SW1	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously								
Switch No.	Specifications	Note														
SW1	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously														

PE: Protective Earth


● R_0 and C_0 indicate surge suppressor circuit. [$R_0=5\sim 200\ \Omega$, $C_0=0.1\sim 0.2\ \mu\text{F}$, 200 WV (400 WV)]

EPCR1201-2 is available as an optional surge suppressor. → Page 123

Power Off Activated Type Electromagnetic Brake Motors

90 W


Frame Size: □90 mm



(Gearhead sold separately)

Right-angle gearheads (hollow shaft or solid shaft) can be combined.

Right-Angle Gearheads → Page 108



Specifications

● Motor (RoHS)

This type of motor does not contain a built-in simple brake mechanism.



Model		Rating	Output Power W	Voltage VAC	Frequency Hz	Current A	Starting Torque mN·m	Rated Torque mN·m	Rated Speed r/min	Capacitor μF
Pinion Shaft Type	Round Shaft Type									
ⓉP	5RK90GE-AW2MJ	30 minutes	90	Single-Phase 100	50	1.78	630	700	1250	35
					60	2.10	590	585	1500	
ⓉP	5RK90GE-AW2MU	30 minutes	90	Single-Phase 110 Single-Phase 115	60	1.81	590	585	1500	30
ⓉP	5RK90GE-CW2MJ	30 minutes	90	Single-Phase 200	50	0.88	600	730	1200	8.0
					60	1.08	590	605	1450	
					Single-Phase 220	50	0.83	600	730	
ⓉP	5RK90GE-CW2ME	30 minutes	90	Single-Phase 220	60	0.96	590	605	1450	7.0
					50	0.82	600	730	1200	
					60	0.96	590	605	1450	
ⓉP	5IK90GE-SW2M	Continuous	90	Three-Phase 200	50	0.64	850	680	1300	-
					60	0.59	700	570	1550	
					60	0.60	700	570	1600	
				Three-Phase 220		0.61				
				Three-Phase 230						

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

ⓉP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

(The power supply to the electromagnetic brake is kept and the brake is released.)

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

● Electromagnetic Brake (Power Off Activated Type)

Motor Model	Voltage VAC	Frequency Hz	Current A	Input W	Holding Brake Torque mN·m
5RK90GE-AW2MJ 5RK90A-AW2MJ	Single-Phase 100	50	0.13	10	500
		60			
5RK90GE-AW2MU 5RK90A-AW2MU	Single-Phase 110 Single-Phase 115	60	0.13	10	500
5RK90GE-CW2MJ 5RK90A-CW2MJ	Single-Phase 200	50	0.07	10	500
		60			
		Single-Phase 220			
5RK90GE-CW2ME 5RK90A-CW2ME	Single-Phase 220	60	0.07	10	500
		50			
		Single-Phase 230			
5IK90GE-SW2M 5IK90A-SW2M	Single-Phase 200	50	0.07	10	500
		60			
		Single-Phase 220			
		Single-Phase 230			

Product Line

● Motor (RoHS)

Model	
Pinion Shaft Type	Round Shaft Type
5RK90GE-AW2MJ	5RK90A-AW2MJ
5RK90GE-AW2MU	5RK90A-AW2MU
5RK90GE-CW2MJ	5RK90A-CW2MJ
5RK90GE-CW2ME	5RK90A-CW2ME
5IK90GE-SW2M	5IK90A-SW2M

● Gearhead/Right-Angle Gearhead (Sold Separately) (RoHS)

Type	Gearhead Model	Gear Ratio
Long Life/ Parallel Shaft	5GE□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GE10XS (Decimal gearhead)	
Right-Angle/ Hollow Shaft	5GE□RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Right-Angle/ Solid Shaft	5GE□RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Gearmotor – Torque Table

- Gearheads and decimal gearheads are sold separately.
- Enter the gear ratio in the box (□) within the model name.
- A colored background indicates gear shaft rotation in the same direction as the motor shaft, while the others rotate in the opposite direction.
- The speed is calculated by dividing the motor's synchronous speed (50 Hz: 1500 r/min, 60 Hz: 1800 r/min) by the gear ratio.
The actual speed is 2 - 20% less than the displayed value, depending on the size of the load.
- To reduce the speed beyond the gear ratio in the table, attach a decimal gearhead (gear ratio: 10) between the gearhead and the motor. In that case, the permissible torque is 20 N·m.

◇ 50 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	500	416	300	250	200	166	120	100	83	60	50	41	30	25	20	16	15	12.5	10	8.3
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
5RK90GE-AW2MJ	5GE□S	1.7	2.0	2.8	3.4	4.3	5.1	6.4	7.7	9.2	11.6	13.9	16.6	20	20	20	20	20	20	20	20
5RK90GE-CW2MJ 5RK90GE-CW2ME	5GE□S	1.8	2.1	3.0	3.5	4.4	5.3	6.7	8.0	9.6	12.0	14.5	17.3	20	20	20	20	20	20	20	20
5IK90GE-SW2M	5GE□S	1.7	2.0	2.8	3.3	4.1	5.0	6.2	7.4	8.9	11.2	13.5	16.2	20	20	20	20	20	20	20	20

◇ 60 Hz

Unit = N·m

Model Motor/ Gearhead	Speed r/min	600	500	360	300	240	200	144	120	100	72	60	50	36	30	24	20	18	15	12	10
		Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150
5RK90GE-AW2MJ 5RK90GE-AW2MU	5GE□S	1.4	1.7	2.4	2.8	3.6	4.3	5.3	6.4	7.7	9.7	11.6	13.9	19.3	20	20	20	20	20	20	20
5RK90GE-CW2MJ 5RK90GE-CW2ME	5GE□S	1.5	1.8	2.5	2.9	3.7	4.4	5.5	6.6	7.9	10.0	12.0	14.4	20	20	20	20	20	20	20	20
5IK90GE-SW2M	5GE□S	1.4	1.7	2.3	2.8	3.5	4.2	5.2	6.2	7.5	9.4	11.3	13.5	18.8	20	20	20	20	20	20	20

Permissible Overhung Load and Permissible Thrust Load

Motor (Round shaft type) → Page 107


Gearhead → Page 107

Permissible Load Inertia J for Gearhead


→ Page 107

Starting and Braking Characteristics (Reference Values)

Single-Phase Motor

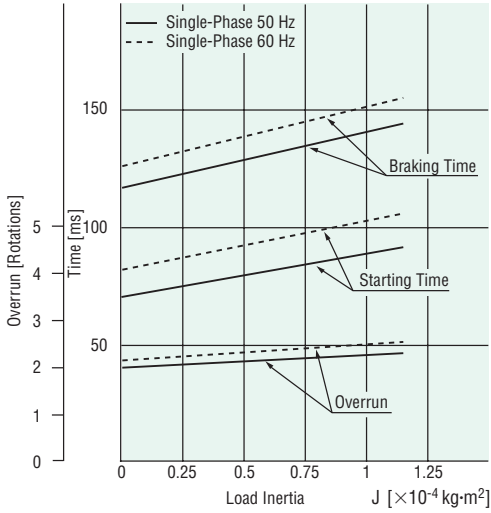

Three-Phase Motor

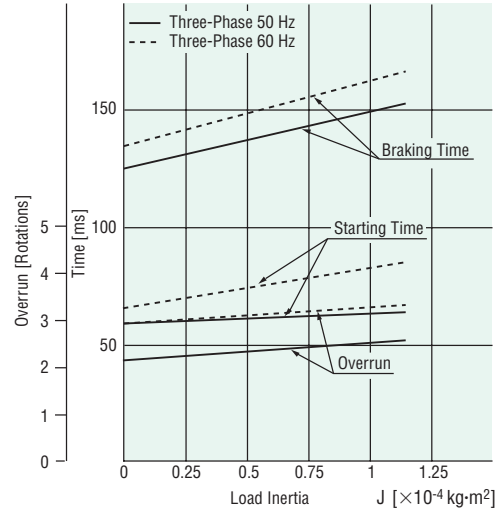


Dimensions (Unit = mm)

Mounting screws are included with gearheads.


Motor/Gearhead

Mass: Motor 3.9 kg

Gearhead 1.5 kg

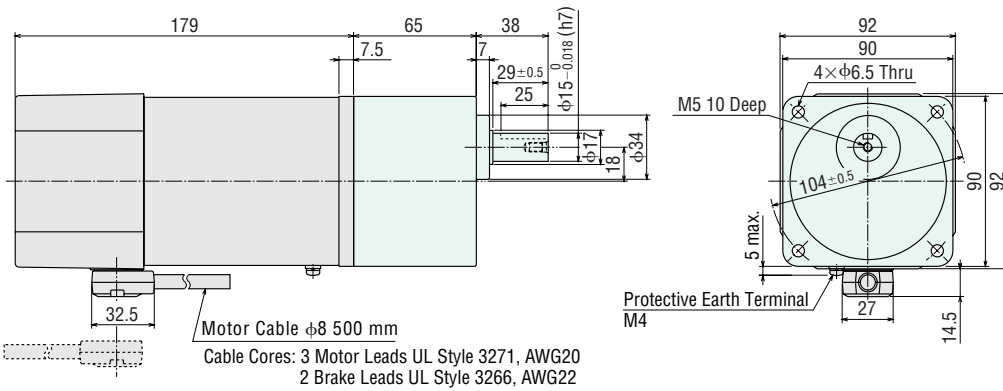


● Cable direction can be switched to the opposite direction.

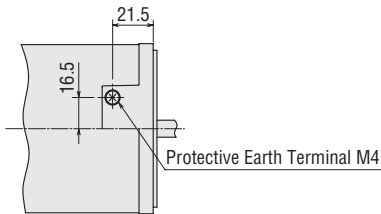

Detail Drawing of Protective Earth Terminal


Key and Key Slot

(The key is included with the gearhead)



◇ Shaft Section of Round Shaft Type

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

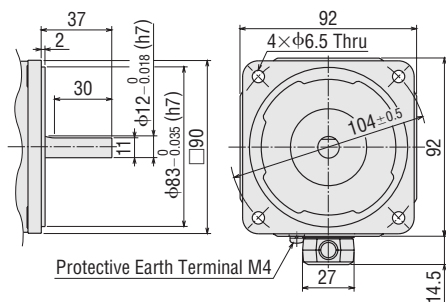


◇ Decimal Gearhead


Can be connected to **GE** pinion shaft type.

5GE10XS

Mass: 0.6 kg

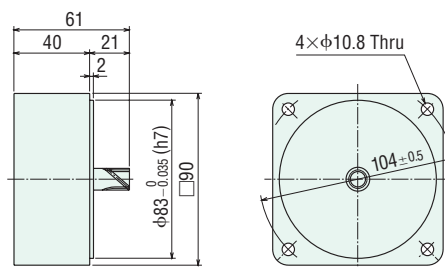

◇ Capacitor (Included with single-phase motors)

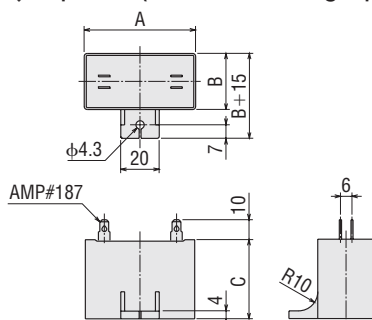

◇ Capacitor Dimensions (mm)

Model		Capacitor Model	A	B	C	Mass (g)	Capacitor Cap
Pinion Shaft Type	Round Shaft Type						
5RK90GE-AW2MJ	5RK90A-AW2MJ	CH350CFAUL2	58	41	58	180	Included
5RK90GE-AW2MU	5RK90A-AW2MU	CH300CFAUL2	58	35	50	140	
5RK90GE-CW2MJ	5RK90A-CW2MJ	CH80BFAUL	58	35	50	130	
5RK90GE-CW2ME	5RK90A-CW2ME	CH70BFAUL	58	35	50	130	

Connection Diagrams


- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

Single-Phase Motor	<p>5RK90GE-AW2M□</p> <p>5RK90GE-CW2M□</p>	<p>SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.</p> <p>If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).</p> <p>Direction of Rotation To rotate the motor in a clockwise (CW) direction, turn SW2 to CW. To rotate the motor in a counterclockwise (CCW) direction, turn SW2 to CCW.</p> <table border="1"> <thead> <tr> <th rowspan="2">Switch No.</th> <th colspan="2">Specifications</th> <th rowspan="2">Note</th> </tr> <tr> <th>Single-Phase 100 VAC, 110/115 VAC Input</th> <th>Single-Phase 200 VAC, 220/230 VAC Input</th> </tr> </thead> <tbody> <tr> <td>SW1</td> <td>125 VAC 5 A minimum (Inductive Load)</td> <td>250 VAC 5 A minimum (Inductive Load)</td> <td>Switched Simultaneously</td> </tr> <tr> <td>SW2</td> <td></td> <td></td> <td>—</td> </tr> </tbody> </table>	Switch No.	Specifications		Note	Single-Phase 100 VAC, 110/115 VAC Input	Single-Phase 200 VAC, 220/230 VAC Input	SW1	125 VAC 5 A minimum (Inductive Load)	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously	SW2			—
	Switch No.	Specifications		Note												
Single-Phase 100 VAC, 110/115 VAC Input		Single-Phase 200 VAC, 220/230 VAC Input														
SW1	125 VAC 5 A minimum (Inductive Load)	250 VAC 5 A minimum (Inductive Load)	Switched Simultaneously													
SW2			—													
Three-Phase Motor	<p>5IK90GE-SW2M</p>	<p>SW1 operates both motor and electromagnetic brake action. The motor will rotate when SW1 is switched simultaneously to ON. When SW1 is switched simultaneously to OFF, the motor stops immediately with the electromagnetic brake and holds the load.</p> <p>If you wish to release the brake while the motor is stopped, apply voltage between the two brake lead wires (orange).</p> <p>Direction of Rotation To change the rotation direction, change any two connections between R, S and T.</p> <table border="1"> <thead> <tr> <th rowspan="2">Switch No.</th> <th colspan="2">Specifications</th> <th rowspan="2">Note</th> </tr> <tr> <th colspan="2">250 VAC 5 A minimum (Inductive Load)</th> </tr> </thead> <tbody> <tr> <td>SW1</td> <td colspan="2"></td> <td>Switched Simultaneously</td> </tr> </tbody> </table>	Switch No.	Specifications		Note	250 VAC 5 A minimum (Inductive Load)		SW1			Switched Simultaneously				
Switch No.	Specifications			Note												
	250 VAC 5 A minimum (Inductive Load)															
SW1			Switched Simultaneously													

PE: Protective Earth

● R_0 and C_0 indicate surge suppressor circuit. [$R_0=5\sim 200\ \Omega$, $C_0=0.1\sim 0.2\ \mu\text{F}$, 200 WV (400 WV)]


EPCR1201-2 is available as an optional surge suppressor. → Page 123

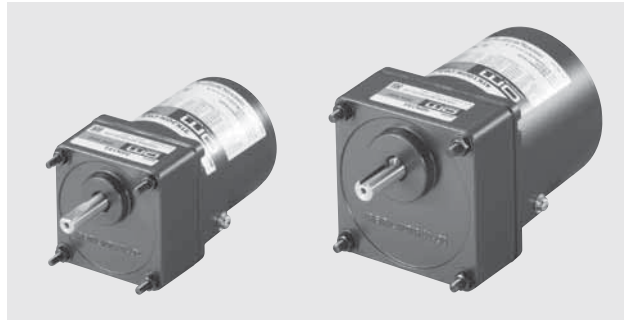

Features

● The Speed Can Vary Widely, Depending on the Sloping Characteristics.


Torque motors have a high starting torque and sloping characteristics, allowing easy speed control simply by changing the voltage of the power supply. (The motor torque changes approximately proportionally to the square of the voltage.)

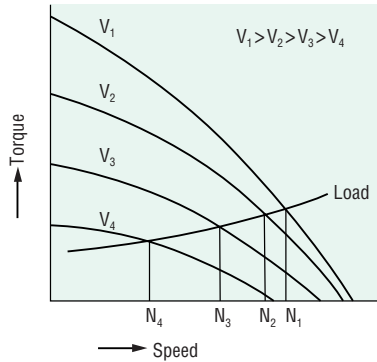

● Suitable for Winding Applications

In an application where an object is released continuously at a constant speed and wound up with constant tension, the torque must be doubled and the speed must be halved if the diameter of the winding spool is doubled.


Constant Tension Wind Up



● Use as a Brake

By using the motor in the braking region of the speed-torque characteristics, it can serve as a brake.

Constant tension operation can be achieved by applying a DC voltage.

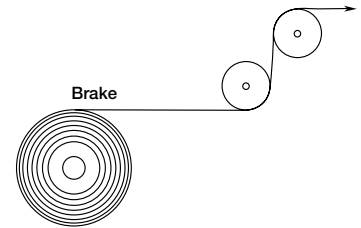


Safety Standards and CE Marking


Standards	Certification Body	Standards File No.	CE Marking
UL 1004 UL 2111 CSA C22.2 No.100 CSA C22.2 No.77	UL	E64197	Low Voltage Directives
EN 60950-1 EN 60034-1 EN 60034-5 IEC 60664-1			
GB 12350	CQC	2005010401150784 (3 W~20 W)	

● When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.


System Configuration



Mounting Brackets (Accessories)
(→ Page 121)



Flexible Couplings (Accessories)
(→ Page 123)

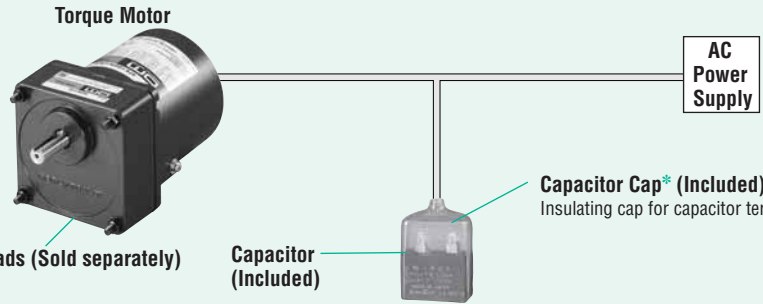

Torque Motor

AC Power Supply

Capacitor Cap* (Included)
Insulating cap for capacitor terminal section.

Capacitor (Included)

Gearheads (Sold separately)

● **Example of System Configuration (Body)**

Motor (Pinion Shaft) 4TK10GN-CW2E	+	Long Life/Low Noise GN-S Gearhead 4GN25S	Mounting Bracket SOL4M5	Flexible Coupling MCL301012
		⊙	○	○

⊙: Required under this system.
○: Selectable according to necessity. Oriental Motor provides.
(Sold separately)

*Capacitor cap is included.

● The system configuration shown above is an example. Other configurations are available. Decimal gearheads are also available.

Product Number Code

Motor

5 T K 20 GN - CW 2 E

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

①	Motor Frame Size	2: 60 mm 3: 70 mm 4: 80 mm 5: 90 mm
②	Motor Type	T: Torque Motors
③	Series	K: K Series
④	Output Power (W)	(Example) 20: 20 W
⑤	Motor Shaft Type	GN: GN Type Pinion Shaft A: Round Shaft
⑥	Power Supply Voltage	AW: Single-Phase 100 VAC, 110/115 VAC CW: Single-Phase 200 VAC, 220/230 VAC
⑦	2: RoHS-Compliant	
⑧	Included Capacitor	J: For Single-Phase 100 VAC, 200 VAC U: For Single-Phase 110/115 VAC E: For Single-Phase 220/230 VAC

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.

When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

(Example) Model: **5TK20GN-CW2E**

→ Motor nameplate and product approved under various safety standards:

5TK20GN-CW2

Gearhead

5 GN 50 S

① ② ③ ④

①	Gearhead Frame Size	2: 60 mm 3: 70 mm 4: 80 mm 5: 90 mm
②	Type of Pinion	GN: GN Type Pinion
③	Gear Ratio	(Example) 50: Gear Ratio of 1:50 10X denotes the decimal gearhead of gear ratio 1:10
④	GN Type Pinion	S: Long Life/Low Noise GN-S Gearhead, RoHS-Compliant

Note:

A right-angle gearhead cannot be combined.

Product Line

Motor (RoHS)

Output Power	Model	
	Pinion Shaft Type	Round Shaft Type
3 W	2TK3GN-AW2J	2TK3A-AW2J
	2TK3GN-AW2U	2TK3A-AW2U
	2TK3GN-CW2J	2TK3A-CW2J
	2TK3GN-CW2E	2TK3A-CW2E
6 W	3TK6GN-AW2J	3TK6A-AW2J
	3TK6GN-AW2U	3TK6A-AW2U
	3TK6GN-CW2J	3TK6A-CW2J
	3TK6GN-CW2E	3TK6A-CW2E
10 W	4TK10GN-AW2J	4TK10A-AW2J
	4TK10GN-AW2U	4TK10A-AW2U
	4TK10GN-CW2J	4TK10A-CW2J
	4TK10GN-CW2E	4TK10A-CW2E
20 W	5TK20GN-AW2J	5TK20A-AW2J
	5TK20GN-AW2U	5TK20A-AW2U
	5TK20GN-CW2J	5TK20A-CW2J
	5TK20GN-CW2E	5TK20A-CW2E

Gearhead (Sold Separately) (RoHS)

Applicable Motor Output Power (Pinion Shaft Type)	Gearhead Model	Gear Ratio
3 W	2GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	2GN10XS (Decimal gearhead)	
6 W	3GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	3GN10XS (Decimal gearhead)	
10 W	4GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	4GN10XS (Decimal gearhead)	
20 W	5GN□S	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GN10XS (Decimal gearhead)	

● Enter the gear ratio in the box (□) within the model name.

Specifications

● 3 W, 6 W, 10 W (RoHS)



Model		Rating at Locked Rotor	Voltage	Frequency	Starting Torque	Max. Output Power	Speed at Max. Output	Torque at Max. Output	Current at Max. Output	Input Power at Max. Output	Capacitor	
Pinion Shaft Type	Round Shaft Type											VAC
TP	2TK3GN-AW2J	2TK3A-AW2J	5 minutes	100	50	70	3	750	39	0.42	40	7.0
					60	70	3.5	900	38	0.48	45	
			Continuous	50	50	18	0.8	750	10	0.21	10	
					60	20	1	900	11	0.30	14	
TP	2TK3GN-AW2U	2TK3A-AW2U	5 minutes	110	60	70	3.5	900	38	0.42	45	6.0
										115		
			Continuous	60	60	25	1.2	900	13	0.26	15	
TP	2TK3GN-CW2J	2TK3A-CW2J	5 minutes	200	50	70	3	750	39	0.210	40	1.8
					60	70	3.5	900	38	0.230	45	
			Continuous	100	50	18	0.8	750	10	0.105	10	
					60	20	1	900	11	0.150	15	
TP	2TK3GN-CW2E	2TK3A-CW2E	5 minutes	220	50	70	3	750	39	0.220	45	1.5
										230		
			Continuous	115	60	70	3.5	900	38	0.215	45	
										230		
TP	3TK6GN-AW2J	3TK6A-AW2J	5 minutes	100	50	140	6	750	78	0.64	60	11
					60	140	7.5	900	82	0.63	60	
			Continuous	50	50	40	1.6	750	21	0.31	15	
					60	45	2	900	23	0.45	20	
TP	3TK6GN-AW2U	3TK6A-AW2U	5 minutes	110	60	150	8	900	87	0.60	65	9.0
										115		
			Continuous	60	60	55	2.6	900	28	0.37	20	
TP	3TK6GN-CW2J	3TK6A-CW2J	5 minutes	200	50	140	6	750	78	0.340	60	3.0
					60	140	7.5	900	82	0.340	65	
			Continuous	100	50	40	1.6	750	21	0.165	15	
					60	45	2	900	23	0.245	25	
TP	3TK6GN-CW2E	3TK6A-CW2E	5 minutes	220	50	140	6	750	78	0.390	70	2.5
										230		
			Continuous	115	60	150	8	900	87	0.320	70	
										230		
TP	4TK10GN-AW2J	4TK10A-AW2J	5 minutes	100	50	220	10	750	130	0.76	70	14
					60	210	12	900	130	0.88	85	
			Continuous	50	50	60	2.3	750	30	0.40	20	
					60	65	2.8	900	30	0.54	25	
TP	4TK10GN-AW2U	4TK10A-AW2U	5 minutes	110	60	210	12	900	130	0.74	80	11
										115		
			Continuous	60	60	70	3.3	900	35	0.45	25	
TP	4TK10GN-CW2J	4TK10A-CW2J	5 minutes	200	50	220	10	750	130	0.38	70	3.5
					60	210	12	900	130	0.43	85	
			Continuous	100	50	60	2.3	750	30	0.19	19	
					60	65	2.8	900	30	0.27	25	
TP	4TK10GN-CW2E	4TK10A-CW2E	5 minutes	220	50	220	10	750	130	0.41	80	3.0
										230		
			Continuous	115	60	210	12	900	130	0.39	80	
										230		
					50	65	2.8	750	35	0.18	20	
										60	70	

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate. When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

● 20 W (RoHS)



Model		Rating at Locked Rotor	Voltage VAC	Frequency Hz	Starting Torque mN·m	Max. Output Power W	Speed at Max. Output Power r/min	Torque at Max. Output Power mN·m	Current at Max. Output Power A	Input Power at Max. Output Power W	Capacitor μ F
Pinion Shaft Type	Round Shaft Type										
TP 5TK20GN-AW2J	5TK20A-AW2J	5 minutes	100	50	350	20	750	260	1.00	90	18
				60	300	20	900	220	1.18	115	
TP 5TK20GN-AW2U	5TK20A-AW2U	Continuous	50	50	80	4	750	50	0.50	25	14
				60	85	4	900	45	0.69	34	
TP 5TK20GN-AW2J	5TK20A-AW2J	5 minutes	110	60	350	23	900	250	1.00	110	14
			115						1.02	115	
TP 5TK20GN-AW2U	5TK20A-AW2U	Continuous	60	60	100	5.5	900	60	0.58	34	14
			60	60	100	5.5	900	60	0.58	34	
TP 5TK20GN-CW2J	5TK20A-CW2J	5 minutes	200	50	350	20	750	260	0.57	105	4.5
				60	300	20	900	220	0.55	105	
TP 5TK20GN-CW2U	5TK20A-CW2U	Continuous	100	50	80	4	750	50	0.24	24	4.5
				60	85	4	900	45	0.31	30	
TP 5TK20GN-CW2E	5TK20A-CW2E	5 minutes	220	50	350	20	750	260	0.63	120	4.0
									0.68	130	
		220	60	350	20	900	220	0.53	115		
								0.54	120		
		Continuous	115	50	85	4.5	750	60	0.26	29	
				60	100	5.5	900	60	0.30	34	

● The **J**, **U** and **E** at the end of the model name indicate that the unit includes a capacitor. These letters are not listed on the motor nameplate.

When the motor is approved under various safety standards, the model name on the nameplate is the approved model name.

TP: Contains a built-in thermal protector. If a motor overheats for any reason, the thermal protector is opened and the motor stops.

When the motor temperature drops, the thermal protector closes and the motor restarts. Be sure to turn the motor off before inspecting.

General Specifications

● 3 W, 6 W, 10 W, 20 W

Item	Specifications
Insulation Resistance	100 M Ω or more when 500 VDC megger is applied between the windings and the frame after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 1.5 kV at 50 Hz or 60 Hz applied between the windings and the frame for 1 minute after rated motor operation under normal ambient temperature and humidity.
Temperature Rise	Temperature rise of windings are 80°C or less measured by the resistance change method after rated motor operation under normal ambient temperature and humidity, with connecting a gearhead or equivalent heat radiation plate*.
Insulation Class	Class B (130°C)
Overheat Protection	Built-in thermal protector (automatic return type) 3W type open: 130°C \pm 5°C, close: 90°C \pm 15°C Other type open: 130°C \pm 5°C, close: 82°C \pm 15°C
Ambient Temperature	Single-Phase 50 VAC, Single-Phase 100 VAC, Single-Phase 200 VAC: -10°C~+50°C (nonfreezing) Single-Phase 60 VAC, Single-Phase 110 VAC, Single-Phase 115 VAC, Single-Phase 220 VAC, Single-Phase 230 VAC: -10°C~+40°C (nonfreezing)
Ambient Humidity	85% or less (noncondensing)
Degree of Protection	IP20

* Heat radiation plate (Material: Aluminum)


Motor Type	Size (mm)	Thickness (mm)
3 W Type	115×115	5
6 W Type	125×125	
10 W Type	135×135	
20 W Type	165×165	

How to Read Speed – Torque Characteristics

The motor torque changes approximately proportion to the square of the voltage. When the voltage supplied to the motor is changed, speed – torque curves with a sloping characteristics (torque is highest at zero speed and decreases steadily with increasing speed) shifts to that of the corresponding voltage.

When the voltage is changed to 100 VAC, 80 VAC and 60 VAC while the load torque is T_0 , the motor rotates at the speeds N_1 , N_2 and N_3 respectively. Thus, the speed can be changed easily by varying the voltage.

When choosing a torque motor, first determine the required torque and speed. Then select a motor using the speed – torque characteristics curves to determine whether the motor should be operated under continuous duty or limited duty. When used under locked rotor conditions, only the torque factor is considered. The temperature rise of the motor may cause a problem during continuous operation. In this case, choose a motor with an output power large enough for continuous operation and adjust the voltage to control the torque and speed.

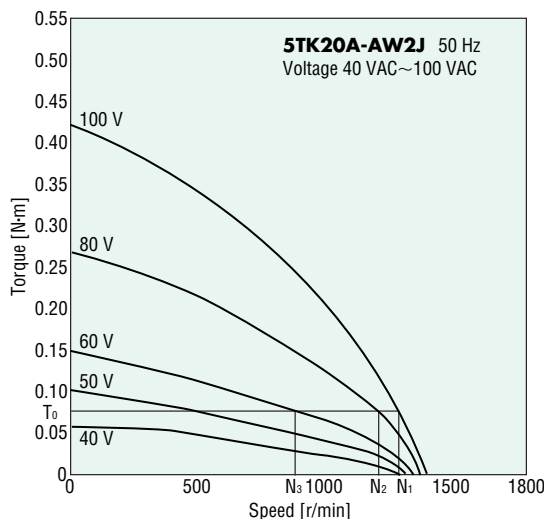

Voltage Control of Torque Motors

The method most commonly used to control voltage is by phase control using a triac. As shown in Fig. 1, by changing the phase angle " α " at which the triac switches, the input voltage is controlled as represented by the phase angle areas of the graph.

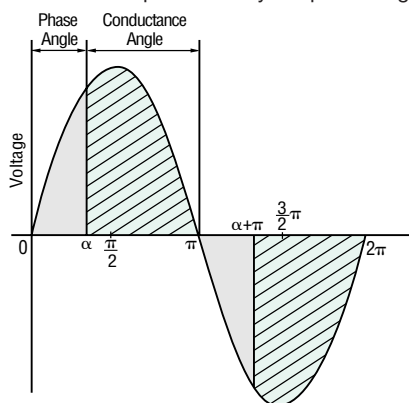


Fig. 1 Phase Control


Gearmotor – Torque Table

Due to the sloping characteristics, torque motors can be operated over a wide speed range, from locked rotor condition to the maximum speed. The permissible torque when a gearhead and a decimal gearhead are directly connected can be calculated according to the following formula, using the speed and torque determined from the speed – torque characteristics.

Speed of gearhead output shaft $N_G = \text{Motor speed} \times 1/\text{gearhead gear ratio}$

Output torque of gearhead $T_G = \text{Motor torque} \times \text{Gearhead gear ratio} \times \text{Gearhead efficiency}$

The output torque of the gearhead must be lower than the maximum permissible torque.

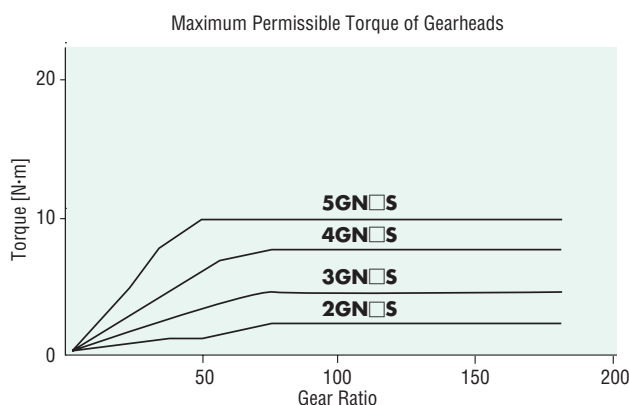


Gearhead Model	Gearhead Gear Ratio	Gearhead Efficiency
2GN□S	3~18	81%
3GN□S		73%
4GN□S	25~36	73%
5GN□S		66%

● Gearheads and decimal gearheads are sold separately.


● Enter the gear ratio in the box (□) within the model name.

Speed – Torque Characteristics (Reference Values)


2TK3GN-AW2J, 2TK3A-AW2J

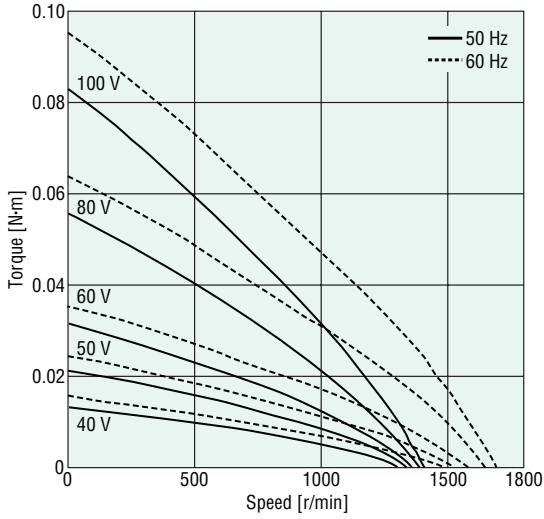


2TK3GN-AW2U, 2TK3A-AW2U

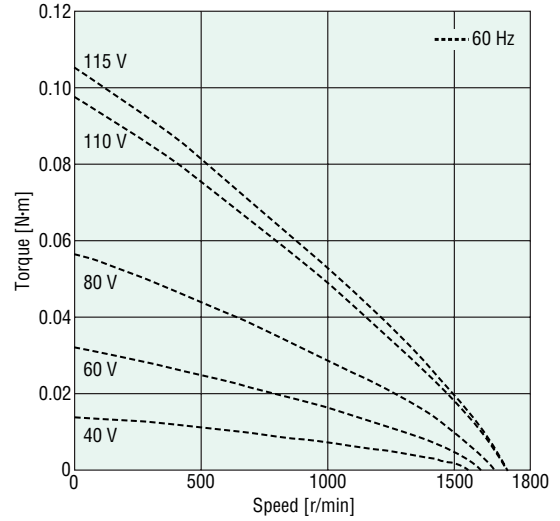


2TK3GN-CW2J, 2TK3A-CW2J

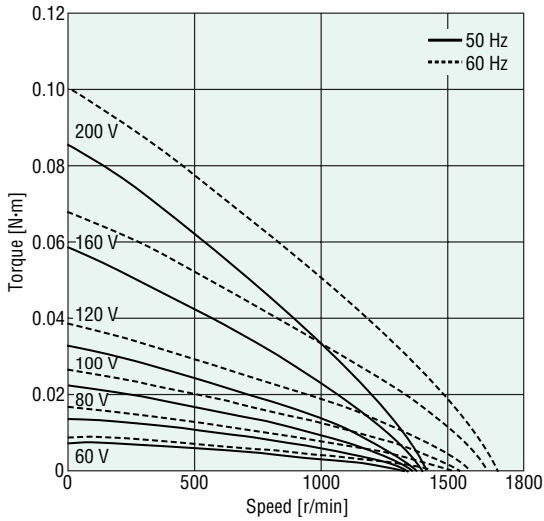


2TK3GN-CW2E, 2TK3A-CW2E

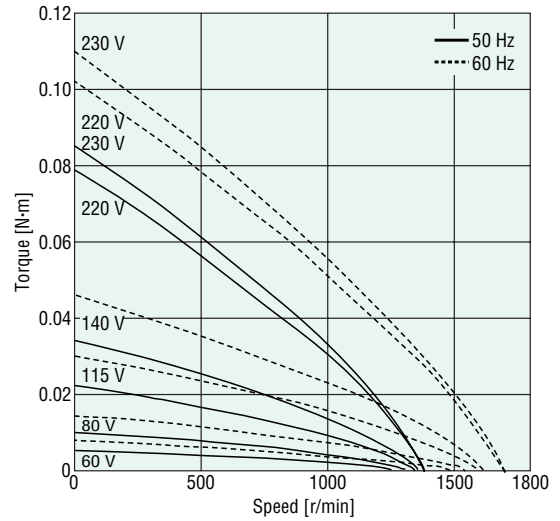


3TK6GN-AW2J, 3TK6A-AW2J

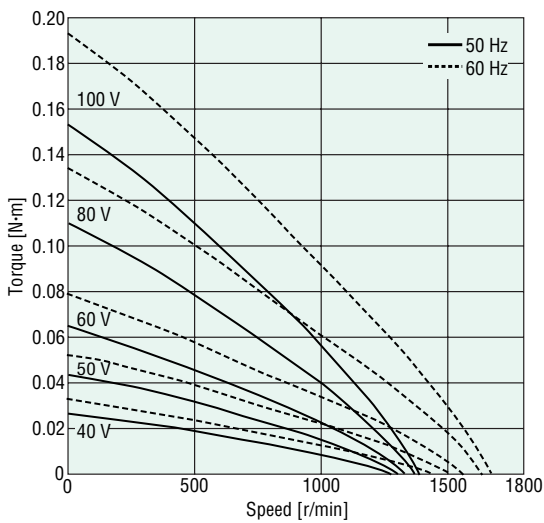


3TK6GN-AW2U, 3TK6A-AW2U

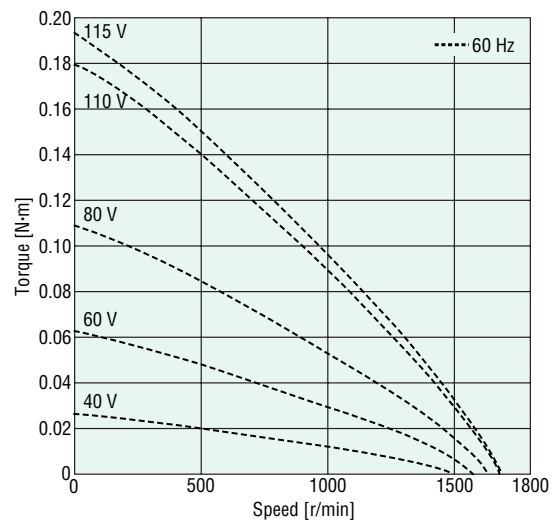


3TK6GN-CW2J, 3TK6A-CW2J

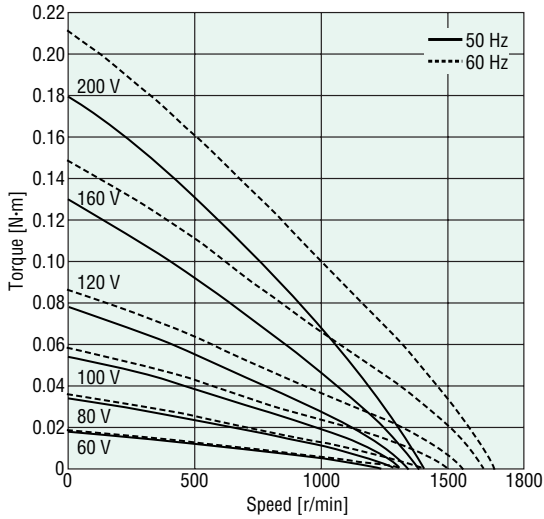


3TK6GN-CW2E, 3TK6A-CW2E

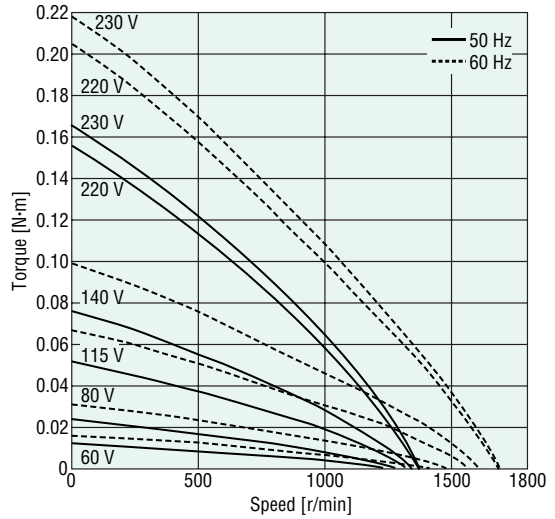


4TK10GN-AW2J, 4TK10A-AW2J

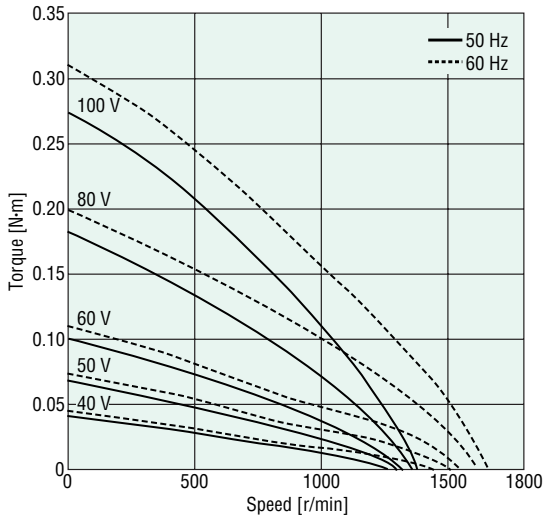


4TK10GN-AW2U, 4TK10A-AW2U

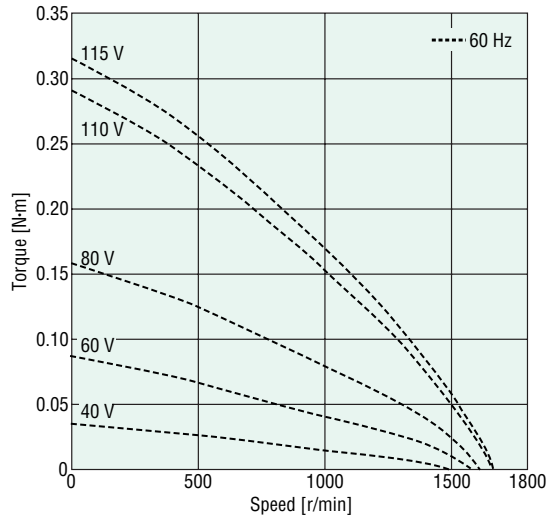


4TK10GN-CW2J, 4TK10A-CW2J

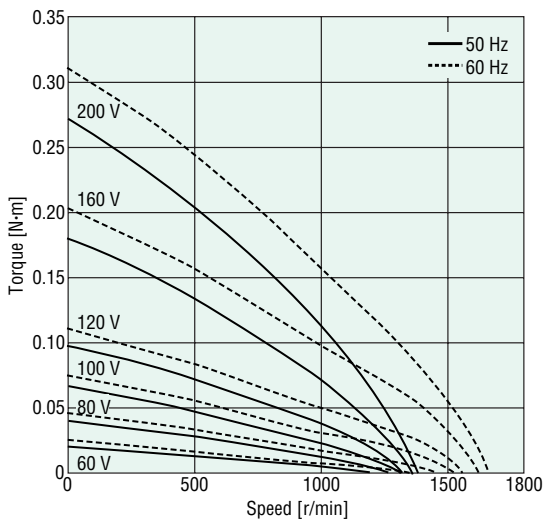


4TK10GN-CW2E, 4TK10A-CW2E

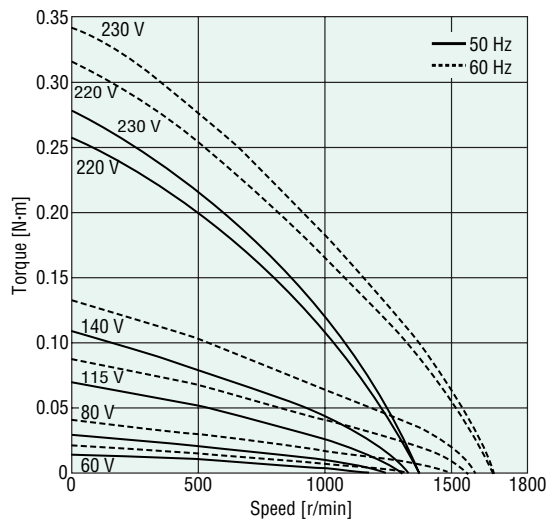


5TK20GN-AW2J, 5TK20A-AW2J

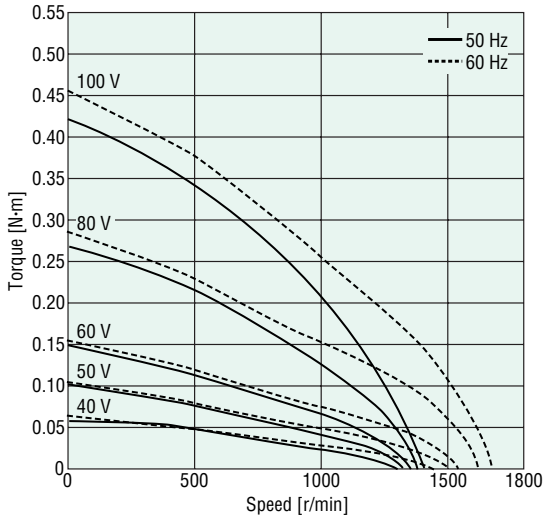


5TK20GN-AW2U, 5TK20A-AW2U

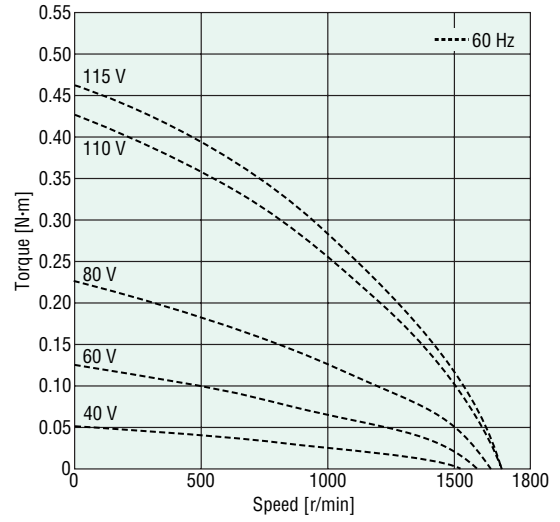

5TK20GN-CW2J, 5TK20A-CW2J

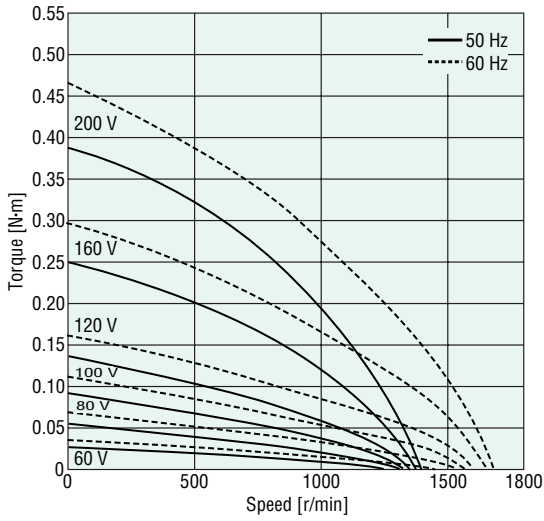

5TK20GN-CW2E, 5TK20A-CW2E

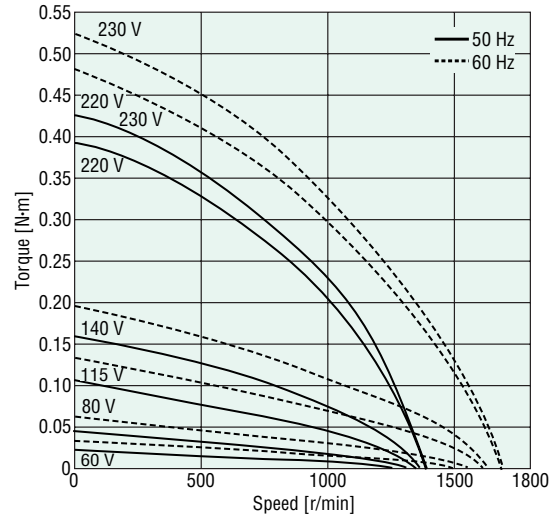

Dimensions (Unit = mm)




Mounting screws are included with gearheads.

3 W

Motor/Gearhead

Mass: Motor 0.7 kg

Gearhead 0.4 kg

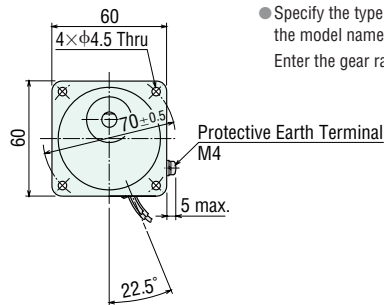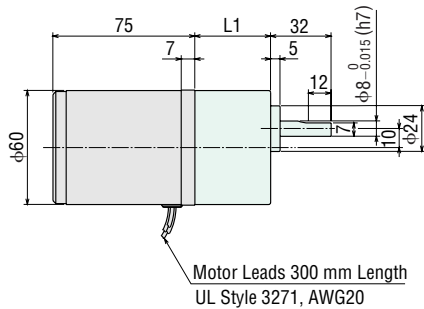

Detail Drawing of Protective Earth Terminal

Motor Model	Gearhead Model	Gear Ratio	L1
2TK3GN-AW2 <input type="checkbox"/>	2GN <input type="checkbox"/> S	3~18	30
2TK3GN-CW2 <input type="checkbox"/>		25~180	40

Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box () within the model name.


Enter the gear ratio in the box () within the model name.

Shaft Section of Round Shaft Type

2TK3A-AW2

2TK3A-CW2

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

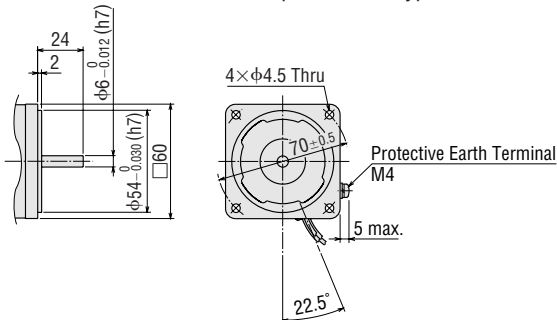


Decimal Gearhead

Can be connected to **2TK3GN** type.

2GN10XS

Mass: 0.2 kg



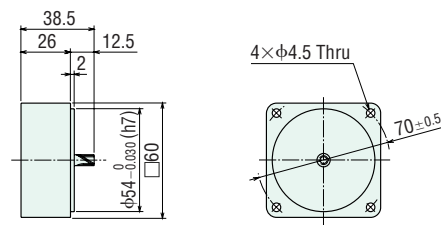


6 W

Motor/Gearhead

Mass: Motor 1.1 kg

Gearhead 0.55 kg

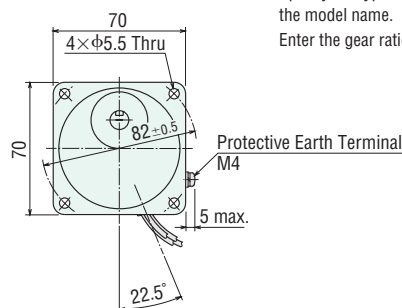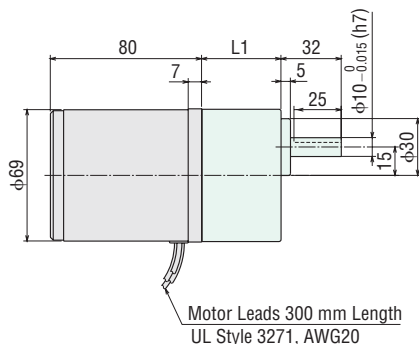

Detail Drawing of Protective Earth Terminal


Motor Model	Gearhead Model	Gear Ratio	L1
3TK6GN-AW2 <input type="checkbox"/>	3GN <input type="checkbox"/> S	3~18	32
3TK6GN-CW2 <input type="checkbox"/>		25~180	42

Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box () within the model name.

Enter the gear ratio in the box () within the model name.

Key and Key Slot


(The key is included with the gearhead)



◇ Shaft Section of Round Shaft Type

3TK6A-AW2
3TK6A-CW2

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

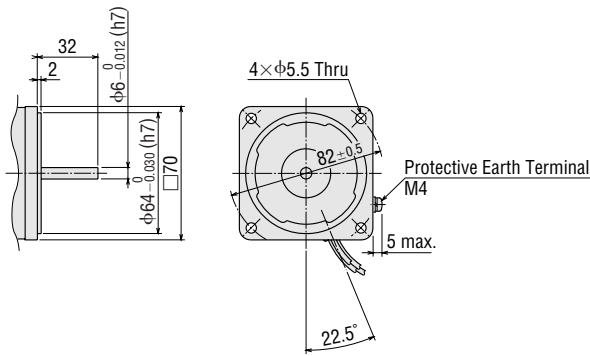


◇ Decimal Gearhead

Can be connected to **3TK6GN** type.

3GN10XS

Mass: 0.3 kg

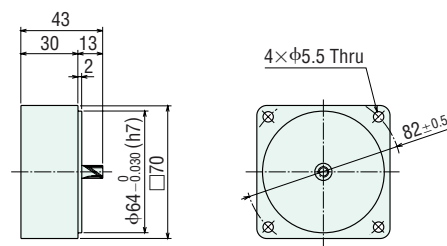

● 10 W

◇ Motor/Gearhead



Mass: Motor 1.5 kg

Gearhead 0.65 kg

Motor Model	Gearhead Model	Gear Ratio	L1
4TK10GN-AW2	4GN □S	3~18	32
4TK10GN-CW2		25~180	42.5

● Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.


Enter the gear ratio in the box (□) within the model name.

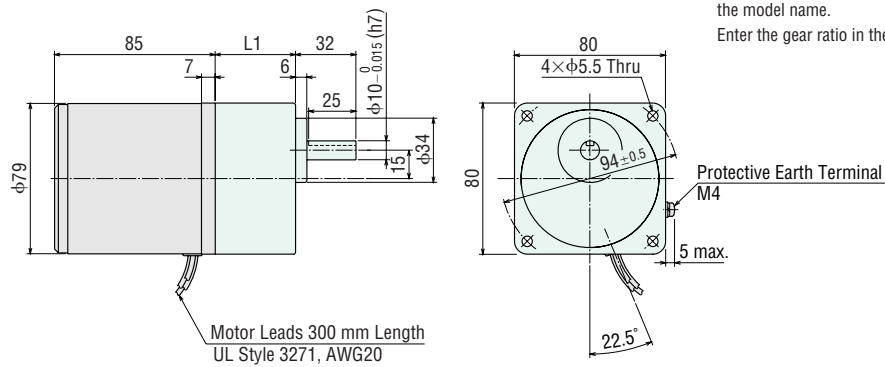

Detail Drawing of Protective Earth Terminal

◇ Key and Key Slot


(The key is included with the gearhead)



◇ Shaft Section of Round Shaft Type

4TK10A-AW2
4TK10A-CW2

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

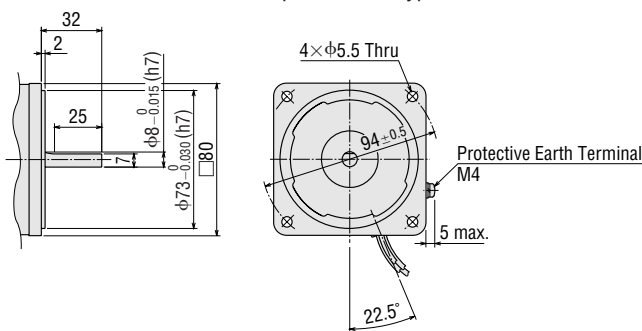


◇ Decimal Gearhead

Can be connected to **4TK10GN** type.

4GN10XS

Mass: 0.4 kg

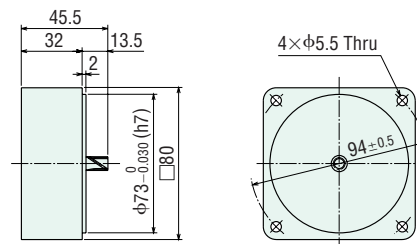

● 20 W




◇ Motor/Gearhead

Mass: Motor 2.5 kg
Gearhead 1.5 kg

Motor Model	Gearhead Model	Gear Ratio	L1
5TK20GN-AW2 <input type="checkbox"/>	5GN <input type="checkbox"/> S	3~18	42
5TK20GN-CW2 <input type="checkbox"/>		25~180	60


● Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box () within the model name.

Enter the gear ratio in the box () within the model name.

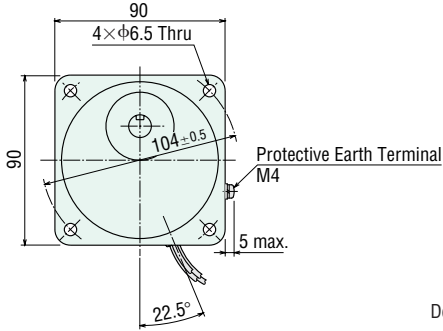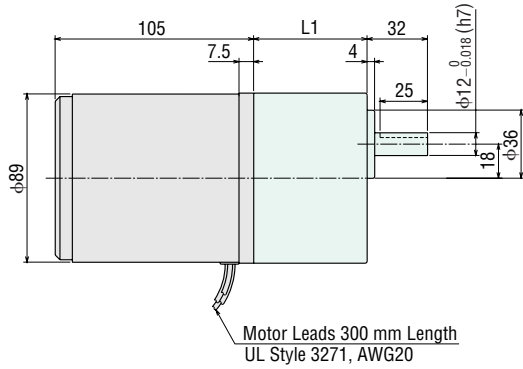

◇ Key and Key Slot

(The key is included with the gearhead)




◇ Shaft Section of Round Shaft Type

5TK20A-AW2

5TK20A-CW2

The mass and motor's dimensions (excluding the shaft section) are the same as those of the pinion shaft type.

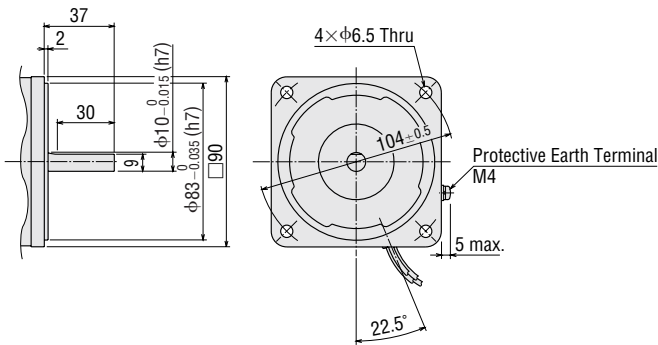


◇ Decimal Gearhead


Can be connected to **5TK20GN** type.

5GN10XS

Mass: 0.6 kg

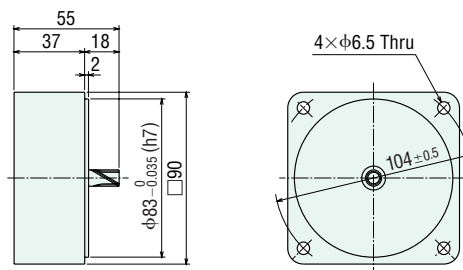

◇ Capacitor (Included with the motors)

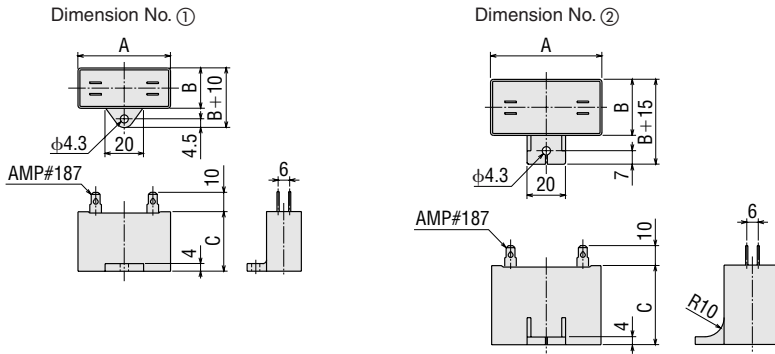

◇ Capacitor Dimensions (mm)


Model		Capacitor Model	A	B	C	Mass (g)	Dimension No.	Capacitor Cap
Pinion Shaft Type	Round Shaft Type							
2TK3GN-AW2J	2TK3A-AW2J	CH70CFAUL2	48	19	29	36	①	Included
2TK3GN-AW2U	2TK3A-AW2U	CH60CFAUL2	38	21	31	40	①	
2TK3GN-CW2J	2TK3A-CW2J	CH18BFAUL	38	21	31	35	①	
2TK3GN-CW2E	2TK3A-CW2E	CH15BFAUL	38	21	31	35	①	
3TK6GN-AW2J	3TK6A-AW2J	CH110CFAUL2	58	21	31	50	①	
3TK6GN-AW2U	3TK6A-AW2U	CH90CFAUL2	48	22.5	31.5	45	①	
3TK6GN-CW2J	3TK6A-CW2J	CH30BFAUL	58	21	31	50	①	
3TK6GN-CW2E	3TK6A-CW2E	CH25BFAUL	48	21	31	45	①	
4TK10GN-AW2J	4TK10A-AW2J	CH140CFAUL2	58	22	35	61	①	
4TK10GN-AW2U	4TK10A-AW2U	CH110CFAUL2	58	21	31	50	①	
4TK10GN-CW2J	4TK10A-CW2J	CH35BFAUL	58	22	35	55	①	
4TK10GN-CW2E	4TK10A-CW2E	CH30BFAUL	58	21	31	50	①	
5TK20GN-AW2J	5TK20A-AW2J	CH180CFAUL2	58	29	41	95	②	
5TK20GN-AW2U	5TK20A-AW2U	CH140CFAUL2	58	22	35	61	①	
5TK20GN-CW2J	5TK20A-CW2J	CH45BFAUL	58	23.5	37	73	②	
5TK20GN-CW2E	5TK20A-CW2E	CH40BFAUL	58	23.5	37	70	②	

■ Connection Diagrams


- The direction of motor rotation is as viewed from the shaft end of the motor. CW represents the clockwise direction, while CCW represents the counterclockwise direction.
- Connection diagrams are also valid for the equivalent round shaft type.
- Specify the type of the capacitor to be included by entering **J**, **U** or **E** in the box (□) within the model name.

2TK3GN-AW2□, 2TK3GN-CW2□, 3TK6GN-AW2□, 3TK6GN-CW2□
 4TK10GN-AW2□, 4TK10GN-CW2□, 5TK20GN-AW2□, 5TK20GN-CW2□

Clockwise



Counterclockwise



PE: Protective Earth

Common Specifications

Permissible Overhung Load and Permissible Thrust Load of Motor

Permissible Overhung Load

Motor		Permissible Overhung Load N	
Motor Frame Size □ (mm)	Output Shaft Diameter φ (mm)	Distance from Shaft End	
		10 mm	20 mm
42	5	40	—
60	6	50	110
70	6	40	60
80	8	90	140
	10	110	120
90	10	140	200
	12	240	270

Permissible Thrust Load

Avoid thrust loads as much as possible. If thrust load is unavoidable, keep it to half or less of the motor mass.

Permissible Overhung Load and Permissible Thrust Load of Gearheads

Model	Gear Ratio	Maximum Permissible Torque N·m	Permissible Overhung Load N		Permissible Thrust Load N
			10 mm from Shaft End	20 mm from Shaft End	
0GN□K	3~180	1.0	20	—	15
2GN□S	3~18	3.0	50	80	30
	25~180		120	180	
3GN□S	3~18	5.0	80	120	40
	25~180		150	250	
4GN□S	3~18	8.0	100	150	50
	25~180		200	300	
5GN□S	3~18	10	250	350	100
	25~180		300	450	
5GE□S	3~9	20	400	500	150
	12.5~18		450	600	
	25~180		500	700	

Permissible Load Inertia for Gearhead J

When a high load inertia (J) is connected to a gearhead, high torque is exerted instantaneously on the gearhead when starting up in frequent, discontinuous operations (or when stopped by an electromagnetic brake, or when stopped instantaneously by a brake pack). Excessive impact loads can cause the gearhead or motor damage.

The table below gives values for permissible load inertia on the motor shaft. Use the motor and gearhead within these parameters. The permissible inertial load value shown for three-phase motors is the value when reversing after a stop.

The permissible load inertia (J) on the gearhead output shaft is calculated with the following equation.

The life of the gearhead when operating at the permissible inertial load with instantaneous stops of the motors with electromagnetic brakes, brake packs or speed control motors is at least 2 million cycles.

Permissible Load Inertia for Gearhead Output Shaft

Gear ratio 1/3~1/50 $J_G = JM \times i^2$ J_G : Permissible load inertia for gearhead output shaft J ($\times 10^{-4}$ kg·m²)

Gear ratio 1/60 or higher $J_G = JM \times 2500$ J_M : Permissible load inertia at the motor shaft J ($\times 10^{-4}$ kg·m²)

i : Gear ratio (Example: $i=3$ means the gear ratio of 1/3)

Permissible Load Inertia at the Motor Shaft

No. of Phase	Motor Frame Size	Output Power	Permissible Load Inertia at the Motor Shaft J ($\times 10^{-4}$ kg·m ²)
Single-Phase	□ 42 mm	1 W, 3 W	0.016
	□ 60 mm	3 W*, 6 W	0.062
	□ 70 mm	6 W*, 15 W	0.14
	□ 80 mm	10 W*, 25 W	0.31
		20 W*, 40 W	0.75
	□ 90 mm	60 W	1.1
		90 W	1.1
Three-Phase	□ 60 mm	6 W	0.062
	□ 80 mm	25 W	0.31
	□ 90 mm	40 W	0.75
		60 W	1.1
		90 W	1.1

* Output power for torque motors

RoHS RoHS-Compliant


Right-Angle Gearheads

Right-angle gearheads are flange-mounted gearheads that use worm gears and special helical gears. They allow motors to be installed at right angles to the axis of equipment such as belt conveyors. They are available in hollow shaft **RH** and solid shaft **RA** models and are ideal for keeping equipment compact.

Features

Space-Saving

- The output shaft is perpendicular to the motor shaft, so the motor can be installed perpendicularly to the axis being driven, enabling space-saving.

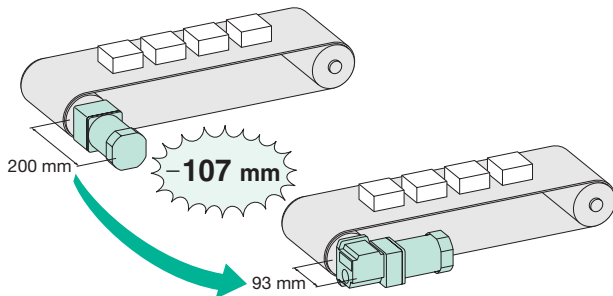

Comparison between **5IK90GE-AW2J** and gearhead with a gear ratio of 1:18

Applicable Products


GN and **GE** pinion motors with matching mounting frame sizes can be installed.

Example) **4IK25GN-CW2E** → **4GN**□**RH** (or **4GN**□**RA**)
5IK60GE-CW2E → **5GE**□**RH** (or **5GE**□**RA**)

Gearheads can be used with pinion shaft type motors listed below.

Motor	Output Power
Induction Motors	25 W, 40 W, 60 W, 90 W
Reversible Motors	25 W, 40 W, 60 W, 90 W
Electromagnetic Brake Motors	25 W, 40 W, 60 W, 90 W

- The right-angle gearheads cannot be used with torque motors.

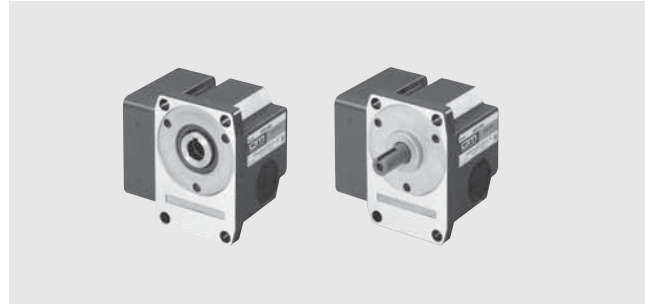

- Hollow shaft gearheads allow additional space savings and simpler mechanism designs due to the removal of some parts of mechanism as they do not require couplings for mounting. When mounted with a torque arm*, no centering is needed, so it is faster to mount the gearhead on the device.

*Mounting Using Torque Arm

Usually, hollow shaft gearheads are locked with a torque arm when mounted so the gearhead does not rotate from the reactive force of the load. The torque arm is available as an accessory for the **5GE**□**RH**. Torque Arm → Page 113

Wide Variation

A wide variety of gear ratio (20 types, from **3** to **180**) is available. The optimum gear ratio can be selected as the same with ordinary gearheads. The maximum permissible torques are also the same as for ordinary gearheads.

Product Number Code

5 GE 25 R H

① ② ③ ④ ⑤

①	Gearhead Frame Size	4 : 80 mm 5 : 90 mm
②	Type	GN : GN Pinion Gear GE : GE Pinion Gear
③	Gear Ratio	(Example) 25 : Gear Ratio of 1:25
④	R : Right-Angle Gearhead	
⑤	Shaft Type	H : Hollow Shaft Type A : Solid Shaft Type

Product Line RoHS

Shaft Type	Gearhead Model	Gear Ratio
Hollow Shaft	4GN □RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GN □RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GE □RH	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
Solid Shaft	4GN □RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GN □RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180
	5GE □RA	3, 3.6, 5, 6, 7.5, 9, 12.5, 15, 18, 25, 30, 36, 50, 60, 75, 90, 100, 120, 150, 180

● Enter the gear ratio in the box (□) within the model name.

Specifications

Gearhead Model	Gear Ratio	Maximum Permissible Torque N·m	Permissible Overhung Load N		Permissible Thrust Load N
			10 mm from Shaft End	20 mm from Shaft End	
4GN □RH	3~180	8.0	250*	220*	100
5GN □RH	3~180	10	350*	310*	200
5GE □RH	3~180	20	560*	500*	250
4GN □RA	3~18	8.0	100	150	100
	25~180		200	300	
5GN □RA	3~18	10	250	350	200
	25~180		300	450	
5GE □RA	3~9	20	400	500	250
	12.5~25		450	600	
	30~180		500	700	

*With the hollow shaft type, the permissible overhung load is measured from the flange-mounting surface.

● Enter the gear ratio in the box (□) within the model name.

Note:

The right-angle gearhead does not have self-locking capabilities.

Gearmotor – Torque Table

Use the efficiency value in the table below for your calculations. When making a selection, remember that the transfer efficiency at startup is lower than at the rated speed.

$$\text{Permissible torque} \cdots \cdots T_G = T_M \times i \times \eta$$

T_G : Permissible torque of gearhead

T_M : Motor torque

i : Gearhead gear ratio

η : Gearhead efficiency

● Gearhead Efficiency

Gearhead Model	Gear Ratio	3	3.6	5	6	7.5	9	12.5	15	18	25	30	36	50	60	75	90	100	120	150	180	
		4GN □RH	Rating	40%				50%				60%										
Startup	40%				50%				54%													
5GN □RH	Rating	50%				68%				60%												
	Startup	50%				60%				54%												
5GE □RH	Rating	50%				68%				60%				50%								
	Startup	50%				60%				54%				45%								
4GN □RA	Rating	50%				60%																
	Startup	50%				54%																
5GN □RA	Rating	68%				60%																
	Startup	60%				54%																
5GE □RA	Rating	68%				60%				50%												
	Startup	60%				54%				45%												

● Enter the gear ratio in the box (□) within the model name.

Calculating Permissible Overhung Load for Hollow Shaft Models

When the end of the shaft being driven is not supported by a bearing as in the figure shown below, calculate the permissible overhung load using the following equations.

(This mechanism is the most demanding in terms of overhung load.)

●4GN□RH

$$\text{Permissible overhung load } W \text{ [N]} = \frac{59.5}{59.5 + L_p} \times 295 \text{ [N]}^*$$

*295 [N]: Permissible overhung load at the flange mounting surface

●5GN□RH


$$\text{Permissible overhung load } W \text{ [N]} = \frac{70}{70 + L_p} \times 400 \text{ [N]}^*$$

*400 [N]: Permissible overhung load at the flange mounting surface

●5GE□RH

$$\text{Permissible overhung load } W \text{ [N]} = \frac{68.5}{68.5 + L_p} \times 645 \text{ [N]}^*$$

*645 [N]: Permissible overhung load at the flange mounting surface

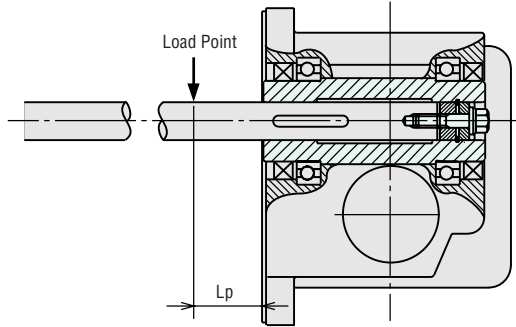

Lp (mm): Distance from flange mounting surface to overhung load point



Dimensions (Unit = mm)

- Mounting screws are included with gearheads.
- Enter the gear ratio in the box (□) within the model name.

◇ Hollow Shaft Type


4GN□RH

Mass: 1.6 kg

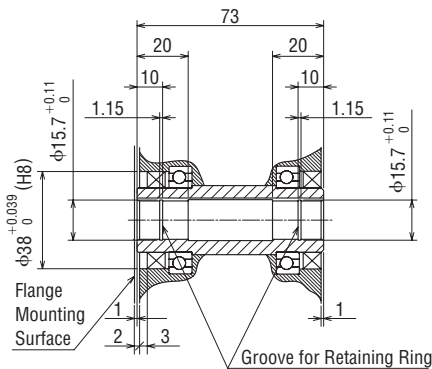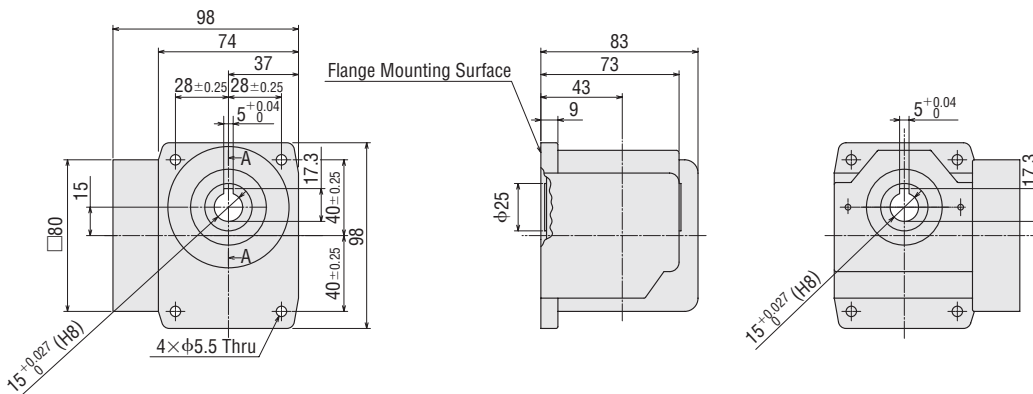

Cross Section AA
(Detail Drawing of Output Shaft)


◇ Key (The key is included with the gearhead)



◇ Solid Shaft Type


4GN□RA

Mass: 1.6 kg

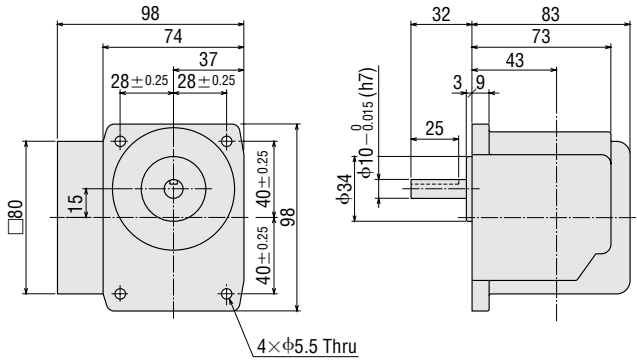

◇ Key and Key Slot


(The key is included with the gearhead)



◇ Solid Shaft Type


5GN□RA

Mass: 2.0 kg

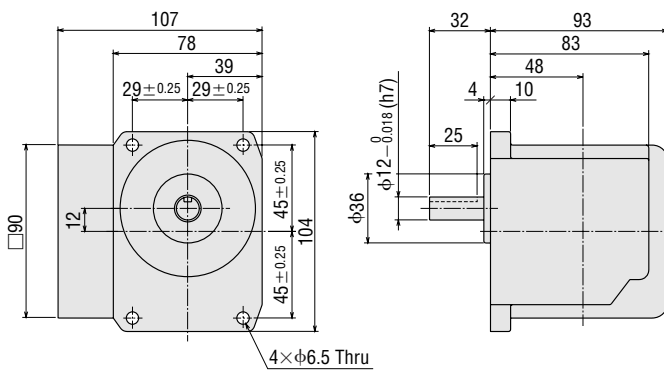

◇ Key and Key Slot


(The key is included with the gearhead)



◇ Solid Shaft Type


5GE□RA

Mass: 2.5 kg

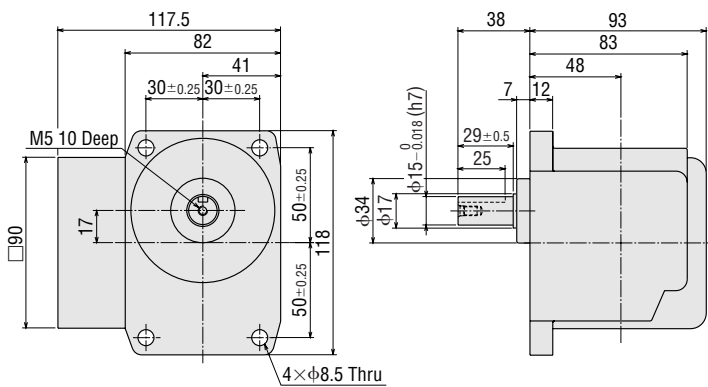


◇ Key and Key Slot

(The key is included with the gearhead)



◇ Dimensions of the Gearhead Mounting Surface

Allow at least 8 mm for the thickness of the mounting plate and use screws of the appropriate length.



(Unit = mm)

Shaft Type	Model	A	B	C	φD	φE
Hollow Shaft	4GN□RH	56	25	55	φ15	φ5.5
	5GN□RH	58	33	57	φ15	φ6.5
	5GE□RH	60	33	67	φ17	φ8.5
Solid Shaft	4GN□RA	56	25	55	φ35	φ5.5
	5GN□RA	58	33	57	φ37	φ6.5
	5GE□RA	60	33	67	φ35	φ8.5

● Enter the gear ratio in the box (□) within the model name.


■ Mounting Method for Hollow Shaft Type Gearhead

● Example of Mounting the Load

These diagrams show how to mount loads depending on the shape of the shaft.

The tolerance of the inner diameter for the hollow shaft is finished as H8, and "key slot" processing is given to mount the load shaft. The recommended tolerance of the load shaft is h7. Use the key provided with the product by fastening it to the shaft. Apply a coating of molybdenum disulfide or similar grease to the inner diameter of the load shaft to prevent binding. Recommended load shaft dimensions are shown on the right.

◇ Stepped Load Shaft

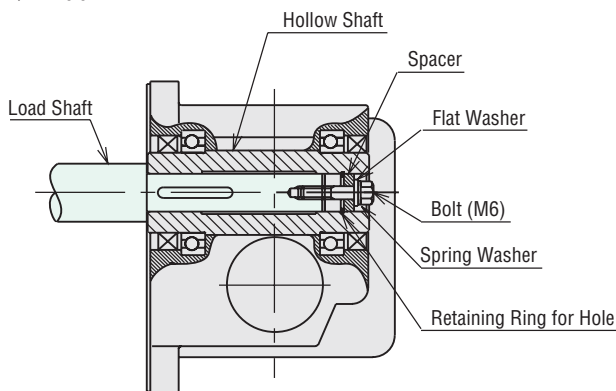

Note:


If the bolt extends out more than 4 mm from the end of the hollow shaft, a safety cover can not be installed. (Hollow shaft type gearheads include safety covers.)

(Unit = mm)

Model	Inner Diameter of Hollow Shaft H8	Recommended Load Shaft Diameter h7
4GN□RH	φ15 ^{+0.027} ₀	φ15 ⁰ _{-0.018}
5GN□RH	φ15 ^{+0.027} ₀	φ15 ⁰ _{-0.018}
5GE□RH	φ17 ^{+0.027} ₀	φ17 ⁰ _{-0.018}

● Enter the gear ratio in the box (□) within the model name.

◇ Straight Load Shaft

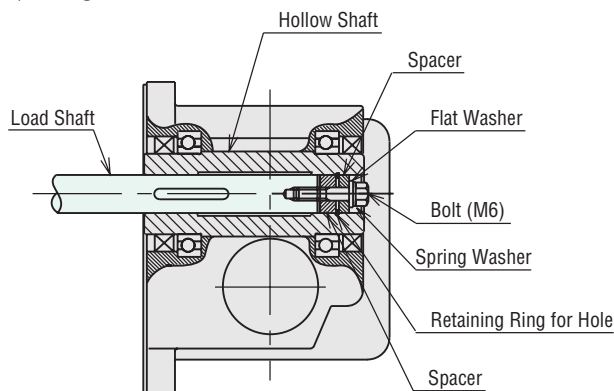

RoHS RoHS-Compliant

Brake Pack for Standard AC Motors

SB50W



The **SB50W** provides instantaneous stop, forward/reverse operation, electromagnetic brake control and thermal protector open detection functions integrated into one unit. These brake packs can sense when the thermal protector is opened, further ensuring the safety of your equipment.



■ Features

● Four Functions in One Integrated Unit

The **SB50W** provides instantaneous stop, forward/reverse operation, electromagnetic brake control and thermal protector open detection functions*.

* Thermal protector open detection function

(Available only when combined with a motor having a built-in thermal protector) When the motor's thermal protector (overheat protection device) is activated, the **SB50W** outputs an alarm signal and automatically cuts the power supply to the motor. The motor will not restart by itself, even after the temperature drops and the thermal protector recovers, until the power is cycled. Possible to reset the alarm through external signals.

● Wide Voltage Range of 100 to 230 VAC

The **SB50W** covers a single-phase voltage range of 100 to 230 VAC $\pm 10\%$, 50/60 Hz, accommodating all of the world's key voltage specifications.

● Conforms to Safety Standards

This is the world first brake pack which conforms to safety standards. The CE marking is used in accordance with the EMC directives and low voltage directives.

● Supports Motors with 1 to 90 W Output

The **SB50W** can be used with induction, reversible, electromagnetic brake and watertight, dust-resistant motors with an output range of 1 to 90 W.

● Switchable Sink/Source Logic


Select the sink mode or source mode for the input/output circuit. You can change the setting at any time.

■ Safety Standards and CE Marking

Standards	Certification Body	Standards File No.	CE Marking
UL 508	UL	E91291	Low Voltage Directives EMC Directives
CSA C22.2 No.14			
EN 50178 EN 60950-1	Conform to EN Standards		

● The EMC value changes according to the wiring and layout. Therefore, the final EMC level must be checked with the brake pack incorporated in the user's equipment.

System Configuration

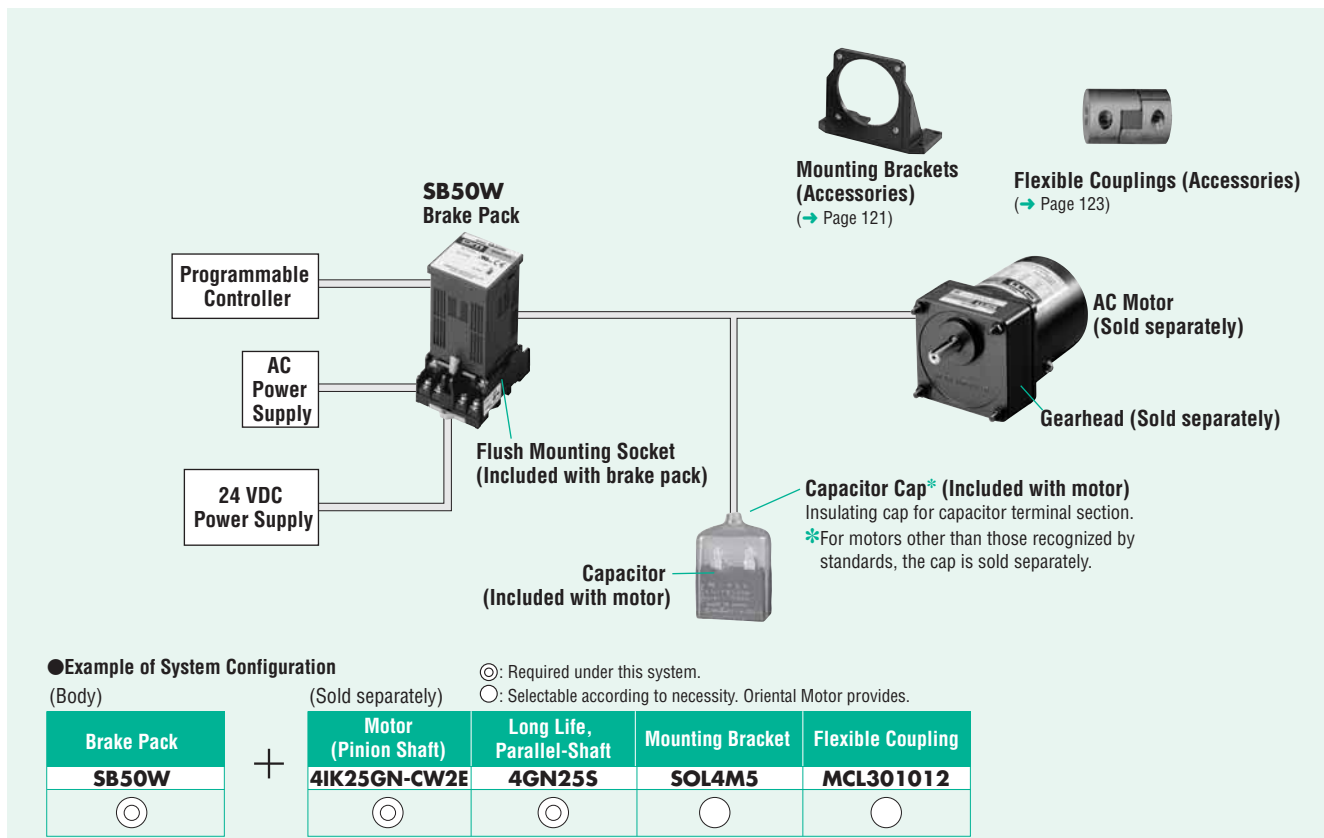

● The system configuration shown above is an example. Other configurations are available.

Specifications RoHS



Model	Power Supply Voltage	Frequency	Applicable Motor Output Voltage	Functions	Power Source for Control	Input Signals	Output Signals	Braking Current Duration
SB50W	Single-phase 100-230 VAC ±10%	50/60 Hz	1 W~90 W	Instantaneous stop Forward/reverse operation Electromagnetic brake control (Electromagnetic brake motors) Thermal protector open detection (Alarm output) Sink/Source logic switch	24 VDC ±10% 0.1 A min.	CW, CCW, FREE/ALARM-RESET Input specifications Photocoupler input Input impedance 4.7 kΩ 24 VDC ±10%	ALARM Output specifications Open collector output External use conditions 26.4 VDC max. 10 mA min.	Approximately 0.2~0.4 seconds

General Specifications

Item	Specifications
Insulation Resistance	100 MΩ or more when measured by a 500 VDC megger between the power supply input terminal and the signal input terminal after rated motor operation under normal ambient temperature and humidity.
Dielectric Strength	Sufficient to withstand 3.0 kV at 50 Hz or 60 Hz applied between the power supply input terminal and the signal input terminal for 1 minute after rated motor operation under normal ambient temperature and humidity.
Ambient Temperature	0°C~+40°C (nonfreezing)
Ambient Humidity	85% or less (noncondensing)
Degree of Protection	IP10

Applicable Products

World K Series 1 W~90 W	Induction Motors* Reversible Motors Electromagnetic Brake Motors
----------------------------	--

* Except for 2-pole type

Braking Current

When a motor is stopped suddenly, a large half-wave rectified current flows through the motor for approximately 0.2 to 0.4 seconds. When connecting a circuit breaker, fuse or transformer, refer to the table below for the braking current (peak value) and select its current capacity.


Motor Output Power	Braking Current [A] (Peak Value)	
	100/110/115 VAC	200/220/230 VAC
1 W	1.0	0.3*
6 W	1.5	1.0
15 W	4.5	2.5
25 W	7.5	4.0
40 W	12	7.0
60 W	18	8.5
90 W	26	17

* Can be used only for 200 VAC.


Dimensions (Unit = mm)

◇ SB50W


Mass: 0.1 kg

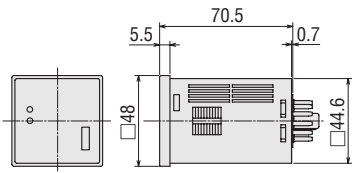

◇ Flush Mounting Socket (Included with brake pack)







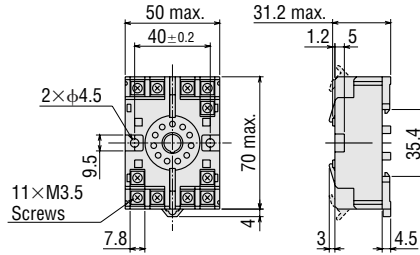


◇ Flush Mounting Socket Panel Cut-Out










Braking Characteristics (Reference Values)







● Induction Motors

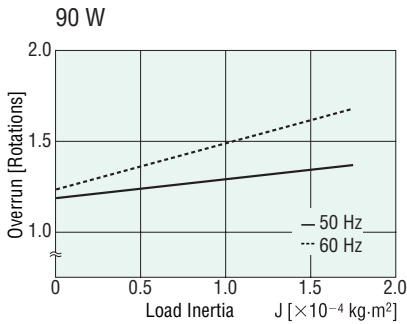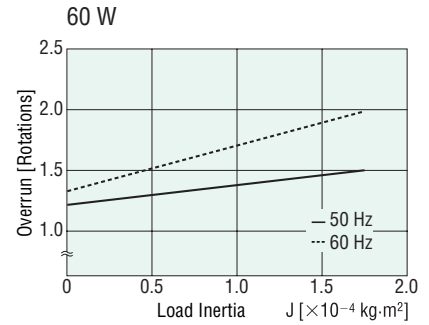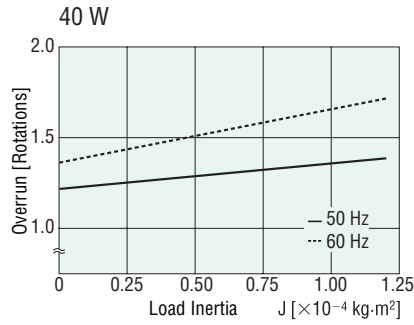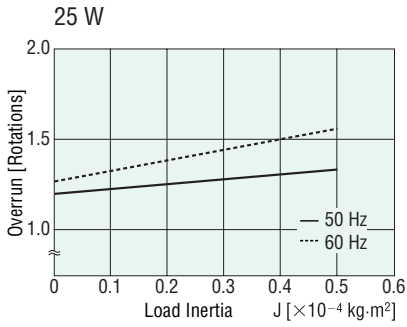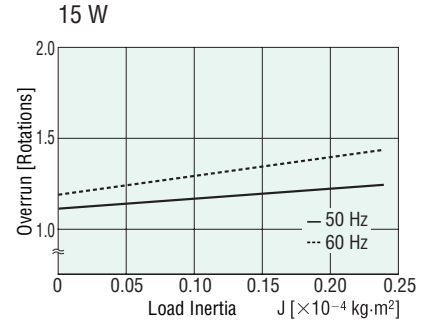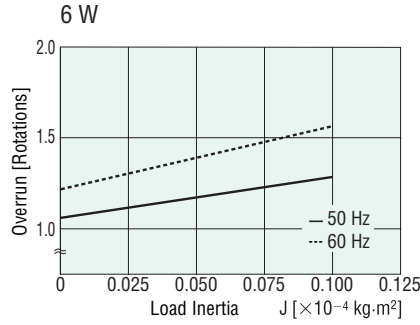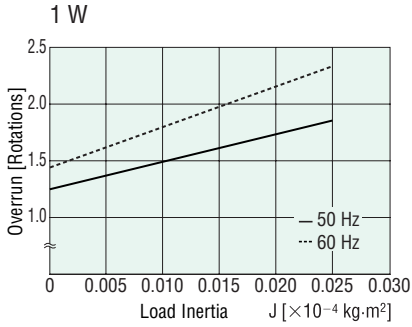

● Reversible Motors

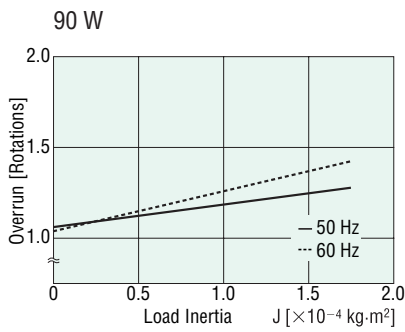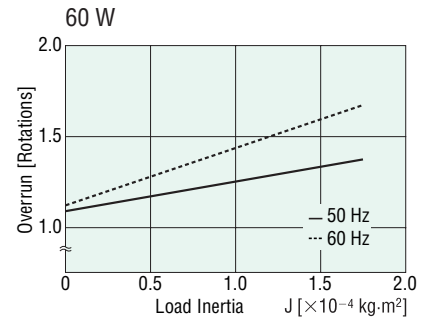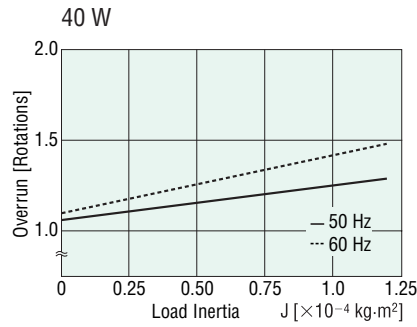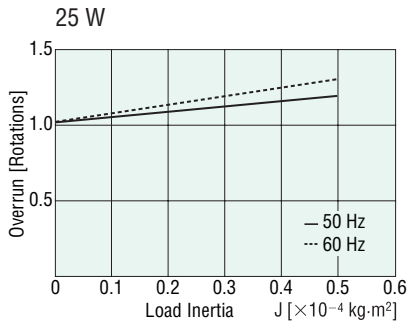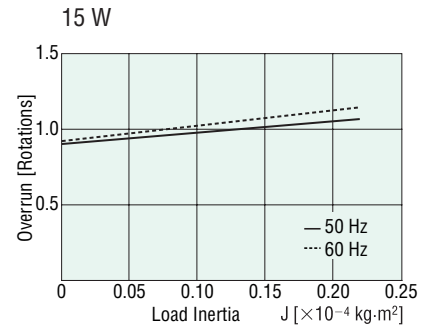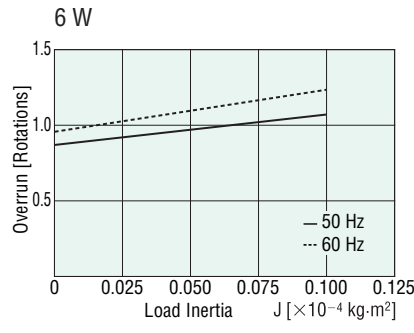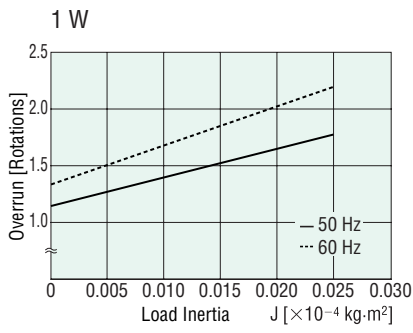


● Electromagnetic Brake Motors

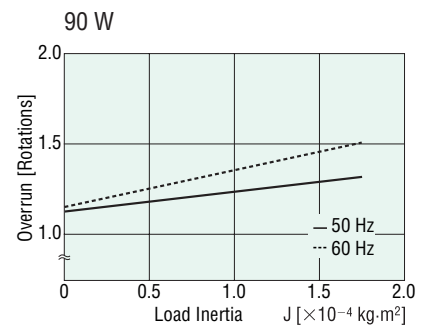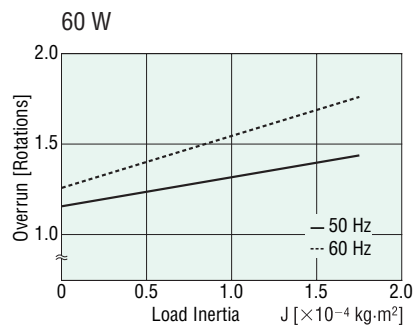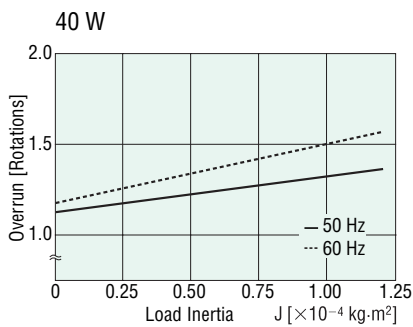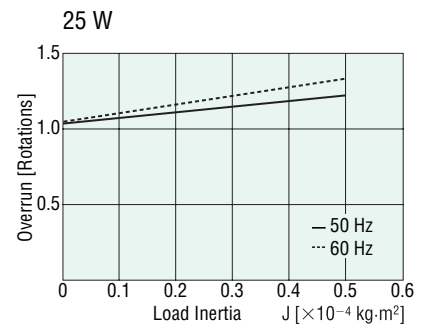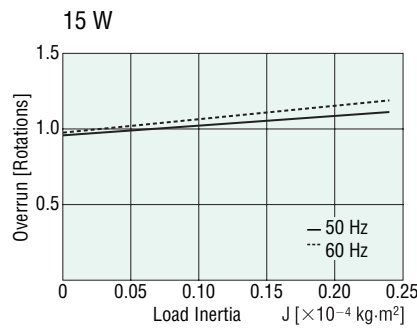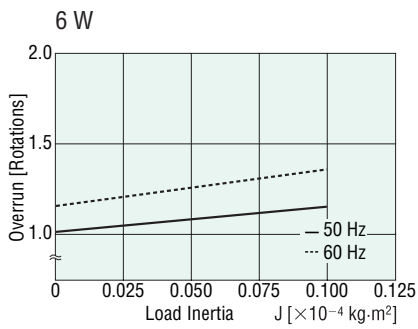

Connection and Operation

Names and Functions of Brake Pack Parts

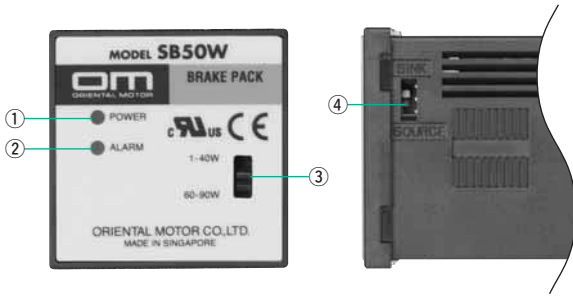


No.	Name	Factory Setting	Functions
①	POWER Indicator (Green)	—	Lit when 24 VDC is supplied.
②	ALARM Indicator (Red)	—	Lit when the ALARM output is "OFF."
③	Motor Output Select Switch	60–90 W	Used to set the motor output.
④	SINK/SOURCE Select Switch	SINK	Used to switch between Sink/Source for the control signal output.

Connection Diagrams


The wiring diagram is for when the SINK/SOURCE select switch is set to the "SINK" side.

Induction Motors/Reversible Motors

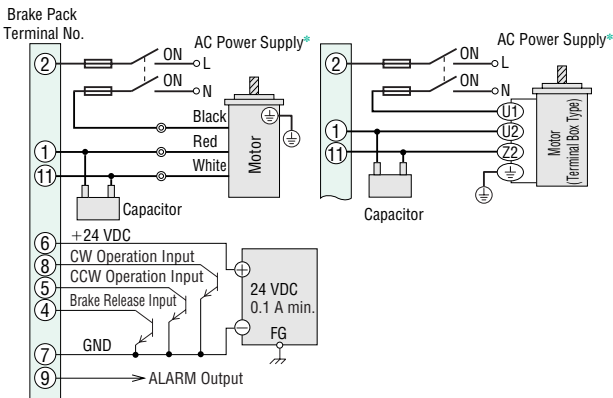

*Single-phase 100/110/115 VAC, single-phase 200/220/230 VAC

Electromagnetic Brake Motors

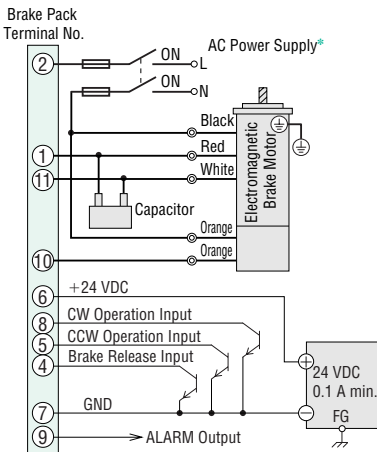

*Single-phase 100/110/115 VAC, single-phase 200/220/230 VAC

Terminal Arrangement for Flush Mounting Socket

Terminal No.	Signal Name	Description
①	Motor/Capacitor	Connect the motor and capacitor.
②	AC Power Input (L)	Single-phase 100–115 VAC Single-phase 200–230 VAC
③	NC	Not used. Leave this terminal unconnected.
④*1	Brake Release Input*2	Not an instantaneous stop but a natural stop
	ALARM-RESET Input	Reset ALARM Output.
⑤	CCW Operation Input*3	Motor runs in the CCW direction during "ON."
⑥	DC Power Input	+24 VDC input
⑦	GND	GND
⑧	CW Operation Input	Motor runs in the CCW direction during "ON."
⑨	ALARM Output	Turns "OFF" when the motor's thermal protector is "open."
⑩	Electromagnetic Brake*4	Connect to the electromagnetic brake.
⑪	Motor/Capacitor	Connect the motor and capacitor.

*1 Functions as a brake release input during normal operation, and as an ALARM-RESET input when the ALARM output is OFF.

*2 Releases the electromagnetic brake for electromagnetic brake motors.

*3 Not used with an induction motor with four lead wires.

*4 Only for electromagnetic brake motors.

Notes:


- The input-signal voltage is 24 VDC ± 10% and 0.1 A or more.
- Minimize the length of the motor cable and the input/output signal cable to reduce EMI.
- Use a cable of AWG18 (0.75 mm²) or more in diameter for the motor cable and power cable.
- Be sure to connect the GND terminal to GND (negative side) of the external controller, or the unit will not operate.

● I/O Signal Circuit


The I/O signal circuit can be switched between the sink mode and source mode using the sink/source select switch on the brake pack. The factory setting is the sink mode.

◇ Sink Logic

● Input Circuit

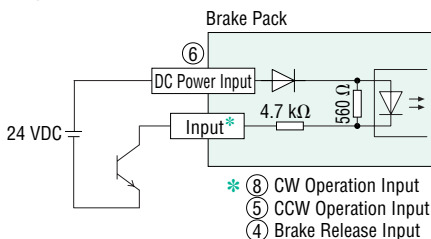


● Output Circuit

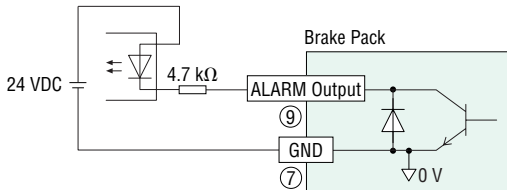


◇ Source Logic


● Input Circuit

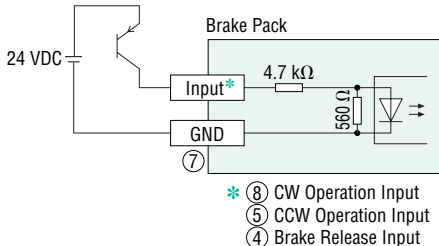

● Output Circuit

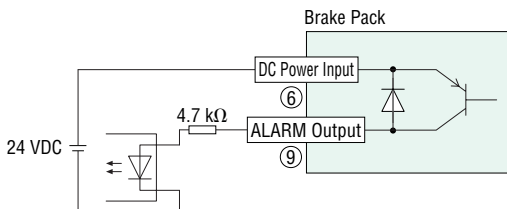

● Timing Chart

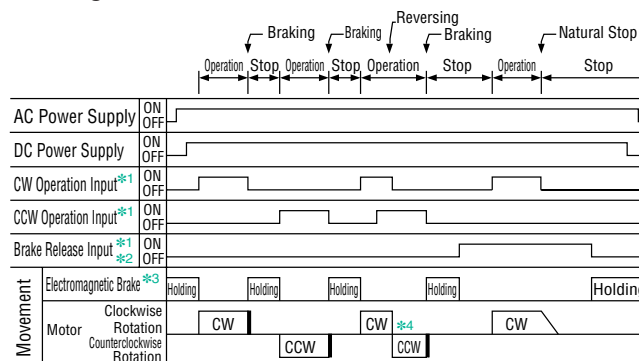

*1 Turn on CW operation input, CCW operation input, and brake release input after turning on AC power.

The motor does not operate if they are input ahead of AC power.

The ALARM indicator will light and ALARM output will switch to "OFF."

*2 The brake release input becomes ALARM-RESET input when the ALARM output is OFF.

*3 Only for electromagnetic brake motors.

*4 The induction motor will not accommodate instantaneous forward/reverse switching.

◇ CW Operation Input

Turning the CW operation signal to "ON" causes the motor's output shaft to turn in the CW direction. Turning it to "OFF" triggers an instantaneous stop.

◇ CCW Operation Input

Turning the CCW operation signal to "ON" causes the motor's output shaft to turn in the CCW direction. Turning it to "OFF" triggers an instantaneous stop.

If both the CW and CCW operation signals are simultaneously turned to "ON," the CW operation signal will take priority. Therefore, the wiring must be changed with an induction motor having four lead wires.

◇ Brake Release Input [ALARM-RESET Input]

Functions as a brake release input during normal operation, and as an ALARM-RESET input when the ALARM output is OFF.

● When normal: [Brake Release Input]


Turning the brake release signal to "ON" disables both the electronic brake and electromagnetic brake. When the CW and CCW operation signals are turned to "OFF," the motor operates via inertial force before coming to a natural stop. When the motor is stationary, the electromagnetic brake is not activated, so the motor's output shaft can be moved freely.

Turning the brake release signal to "OFF" (or leaving the signal unconnected) and turning both CW and CCW operation signals to "OFF" will activate the electronic brake and electromagnetic brake, bringing the motor to an instantaneous stop. Once the motor stops, the electronic brake will release automatically. However, the electromagnetic brake will continue to operate and hold the load.

● When ALARM output is OFF: [ALARM-RESET Input]

When ALARM output is turned OFF, turn all input signals "OFF" and input 0.5 seconds or more for ALARM-RESET input.

Wait at least 0.5 seconds after turning the ALARM-RESET input OFF before restarting operation.

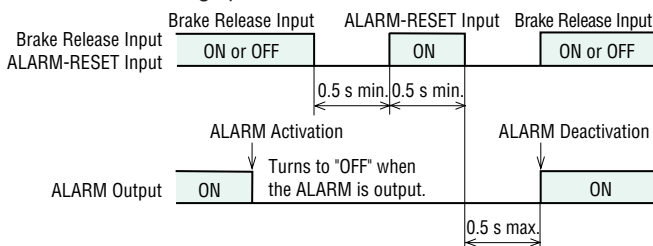

It is also possible to deactivate the alarm by turning off the power and turning it on again. Turn off the DC or AC power, and turn all input signals "OFF" before turning on the power again.

◇ALARM Output (Thermal Protector Open Detection)


Since the **SB50W** ALARM output function detects the operations of the thermal protector, the current flowing in the motor is monitored. Operation occurs under the following conditions:

- When the thermal protector built-in to the motor is opened
- When there is improper connection/disconnection of the power supply cable and motor cable
- When the input signal is turned "ON" before the AC power is turned on
- When the AC power is turned off while the motor is in operation or while it is stopped

In the above conditions, state of the **SB50W** ALARM output is "OFF," the ALARM indicator lamp (red) on the panel lights up, and power supply to the motor is stopped.

With electromagnetic brake motors, the brake is activated in order to hold the load in position.

*When the DC power is turned on, the alarm indication lamp lights up instantaneously, but this is not an abnormality.

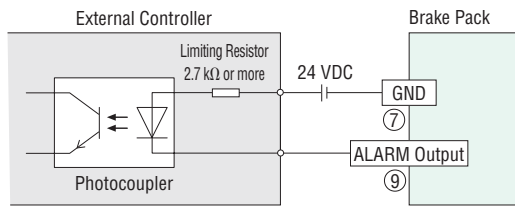

Use a power source of 26.4 VDC or less, and limit the output current to 10 mA or less.

■Operating/Braking Repetition Cycle

The repeated operation and braking of a motor will cause about a temperature increase in the motor and brake pack, thereby limiting the continuous operating time.

Observe the repetition cycle given in the table below for the operation and braking of the motor. The motor may generate heat depending on the conditions in which it is driven. Ensure that the temperature of the motor case does not exceed 90°C.

Motor Output Power	Repetition Cycle
1 W~25 W	2 seconds or more
40 W~90 W	4 seconds or more

(A repetition cycle of two seconds represents operation for one second and stopping for one second.)

Accessories

Motor/Gearhead Mounting Brackets **RoHS**

Mounting Brackets for attaching and securing a motor and gearhead. They are high-strength type, which can be used with high power motors/gearheads. These brackets come with tapped holes. To mount the motor and gearhead, simply fasten with the screws provided to the gearhead. To mount the motor alone, mounting screws must be provided separately.

Please note that these mounting brackets cannot be used with the following products.

- Right-angle gearheads (**RH** type, **RA** type)



For Motor Frame Size: □42 mm

● Model: **SOL0M3**


Mass: 85 g Material: Aluminum

◇ Applicable Products

0GN Gearhead

Motor with the frame size of □42 mm

● Dimensions (Unit = mm)

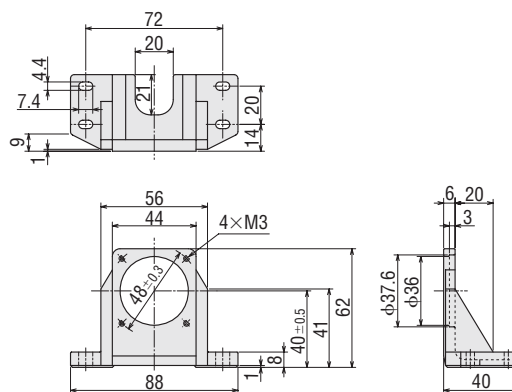

For Motor Frame Size: □60 mm

● Model: **SOL2M4**


Mass: 135 g Material: Aluminum

◇ Applicable Products

2GN Gearhead

Motor with the frame size of □60 mm

● Dimensions (Unit = mm)

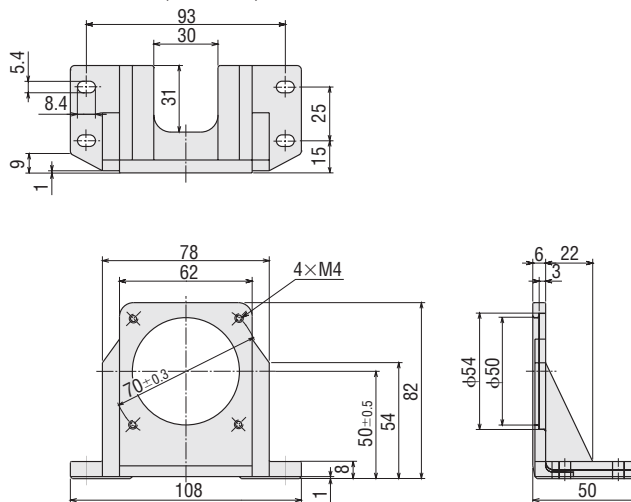

■ For Motor Frame Size: □70 mm

● Model: **SOL3M5**


Mass: 175 g Material: Aluminum

◇ Applicable Products

3GN Gearhead

Motor with the frame size of □70 mm

● Dimensions (Unit = mm)

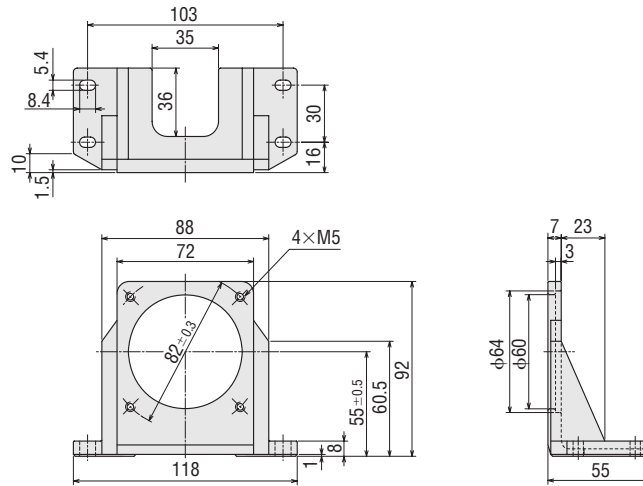

■ For Motor Frame Size: □80 mm

● Model: **SOL4M5**


Mass: 210 g Material: Aluminum

◇ Applicable Products

4GN Gearhead

Motor with the frame size of □80 mm

● Dimensions (Unit = mm)

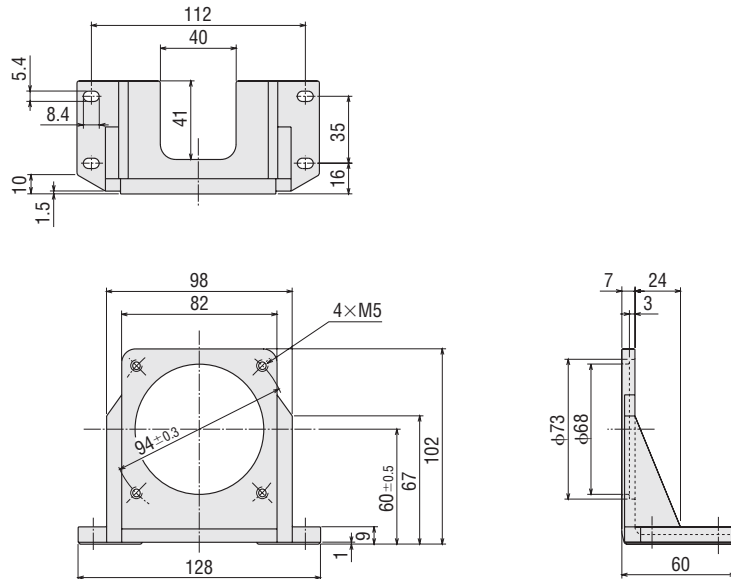

■ For Motor Frame Size: □90 mm

● Model: **SOL5M6**

Mass: 270 g Material: Aluminum


◇ Applicable Products

5GN Gearhead

5GE Gearhead

Motor with the frame size of □90 mm

● Dimensions (Unit = mm)

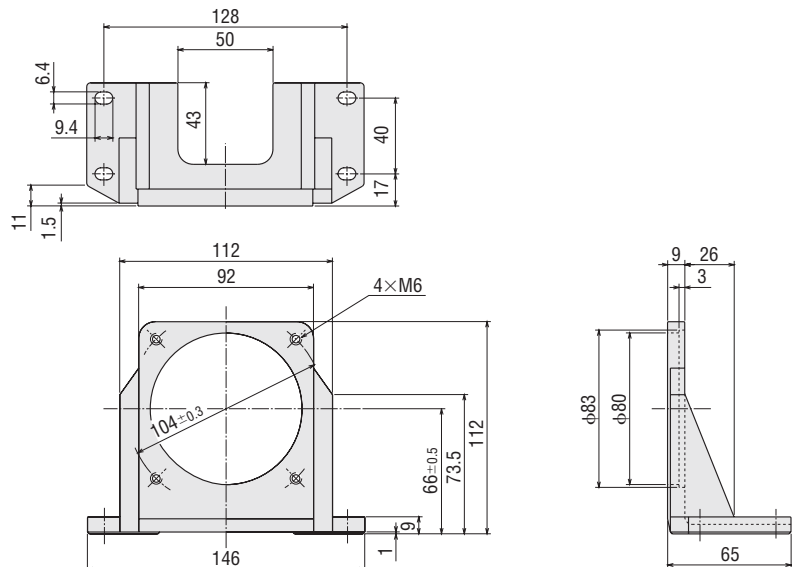

Capacitor Cap (RoHS)

Insulating cap for capacitor terminal section.

(Example of use)



Use a capacitor cap suitable for the external dimensions (A×B) of the capacitor.

Material: Polyvinyl chloride

Our capacitor caps are recognized by UL.

UL File No. E56078

Flexible Couplings (RoHS)

These products are the clamping type couplings to connect between the shaft of motor/gearhead and the shaft of the equipment to be connected.

Once the motor and gearhead are determined, the coupling can be done.

Features

- Couplings come with shaft holes and have standardized combinations for different diameter shaft holes.
- Characteristics are the same for clockwise and counterclockwise rotation.
- Oil-resistant and electrically insulated.
- Aluminum alloy construction.
- The shaft being driven is not damaged, since shafts are joined by clamping.
- Easy installation due to a separated hub and sleeve design.

CR Circuit for Surge Suppression (RoHS)

This product is used to protect the contacts of the relay and/or switch used for controlling the reversal of direction and the electromagnetic brake.

Model: EPCR1201-2

250 VAC (120 Ω, 0.1 μF)

Model	External Dimensions A×B (Unit = mm)	Applicable Capacitor Model
CHC5835AUL	58×35	CH400300A

Note:

Ten capacitor caps are included in one bag.
Order capacitor caps in a multiple of one bag.




Gearhead Model	Coupling Type
0GN□K	MCL20
2GN□S	MCL20 MCL30
3GN□S	MCL30
4GN□S 4GN□RA	MCL30 MCL40
5GN□S 5GN□RA	MCL30 MCL40
5GE□S 5GE□RA	MCL40 MCL55

* Type of coupling varies depending on condition of the load.



Dimensions (Unit = mm)

Mass: 5 g

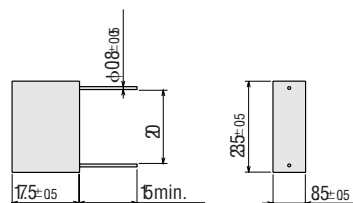

Orientalmotor

This product is manufactured at a plant certified with the international standards **ISO 9001** (for quality assurance) and **ISO 14001** (for systems of environmental management).

Specifications are subject to change without notice.
This catalogue was published in July, 2006.

ORIENTAL MOTOR (EUROPA) GmbH

www.orientalmotor.de

European Headquarters and Düsseldorf Office

Schießstraße 74
40549 Düsseldorf, Germany
Tel: 0211-5206700 Fax: 0211-52067099

Munich Office

Liebigstraße 14
85757 Karlsfeld, Germany
Tel: 08131-59880 Fax: 08131-598888

Hamburg Office

Meckelfelder Weg 2
21079 Hamburg, Germany
Tel: 040-76910443 Fax: 040-76910445

Stuttgart Office

Tel: 073-35-924853 Fax: 073-35-924854

ORIENTAL MOTOR (UK) LTD.

www.oriental-motor.co.uk

Unit 5, Faraday Office Park,
Rankine Road, Basingstoke,
Hampshire RG24 8AH U.K.
Tel: 01256-347090 Fax: 01256-347099

ORIENTAL MOTOR (FRANCE) SARL

www.orientalmotor.fr

France Headquarters

32, Avenue de l'île Saint Martin
92737 Nanterre Cedex, France
Tel: 01 47 86 97 50 Fax: 01 47 82 45 16

Lyon Office

10, Allée des Sorbiers
69673 Bron Cedex, France
Tel: 04 78 41 15 02 Fax: 04 78 41 15 90

ORIENTAL MOTOR ITALIA s.r.l.

www.orientalmotor.it

Italy Headquarters

Via A. De Gasperi, 85
20017 Mazzo di Rho (MI), Italy
Tel: 02-93906346 Fax: 02-93906348

Bologna Office

Via mori, 6
40054 Prunaro di Budrio (BO), Italy
Tel: 051-6931249 Fax: 051-6929266

ORIENTAL MOTOR CO., LTD.

www.orientalmotor.co.jp

Headquarters

16-17, Ueno 6-chome
Taito-ku, Tokyo 110-8536, Japan
Tel: (03)3835-0684 Fax: (03)3835-1890

For more information please contact:



This printed material uses recycled paper and soy inks. This combination is environmentally friendly.

Printed in Japan 06U 3K 83600T